

Cabling Solutions for Industrial Applications




First Edition

**Signal Transmission
Solutions for Reliable,
Mission-Critical Applications**

BELDEN
SENDING ALL THE RIGHT SIGNALS®

Keep productivity high and downtime low with Belden® industrial cables. From industrial automation and process control to wind turbines and robotics, Belden has the cable that combines reliability, ruggedness, and performance.

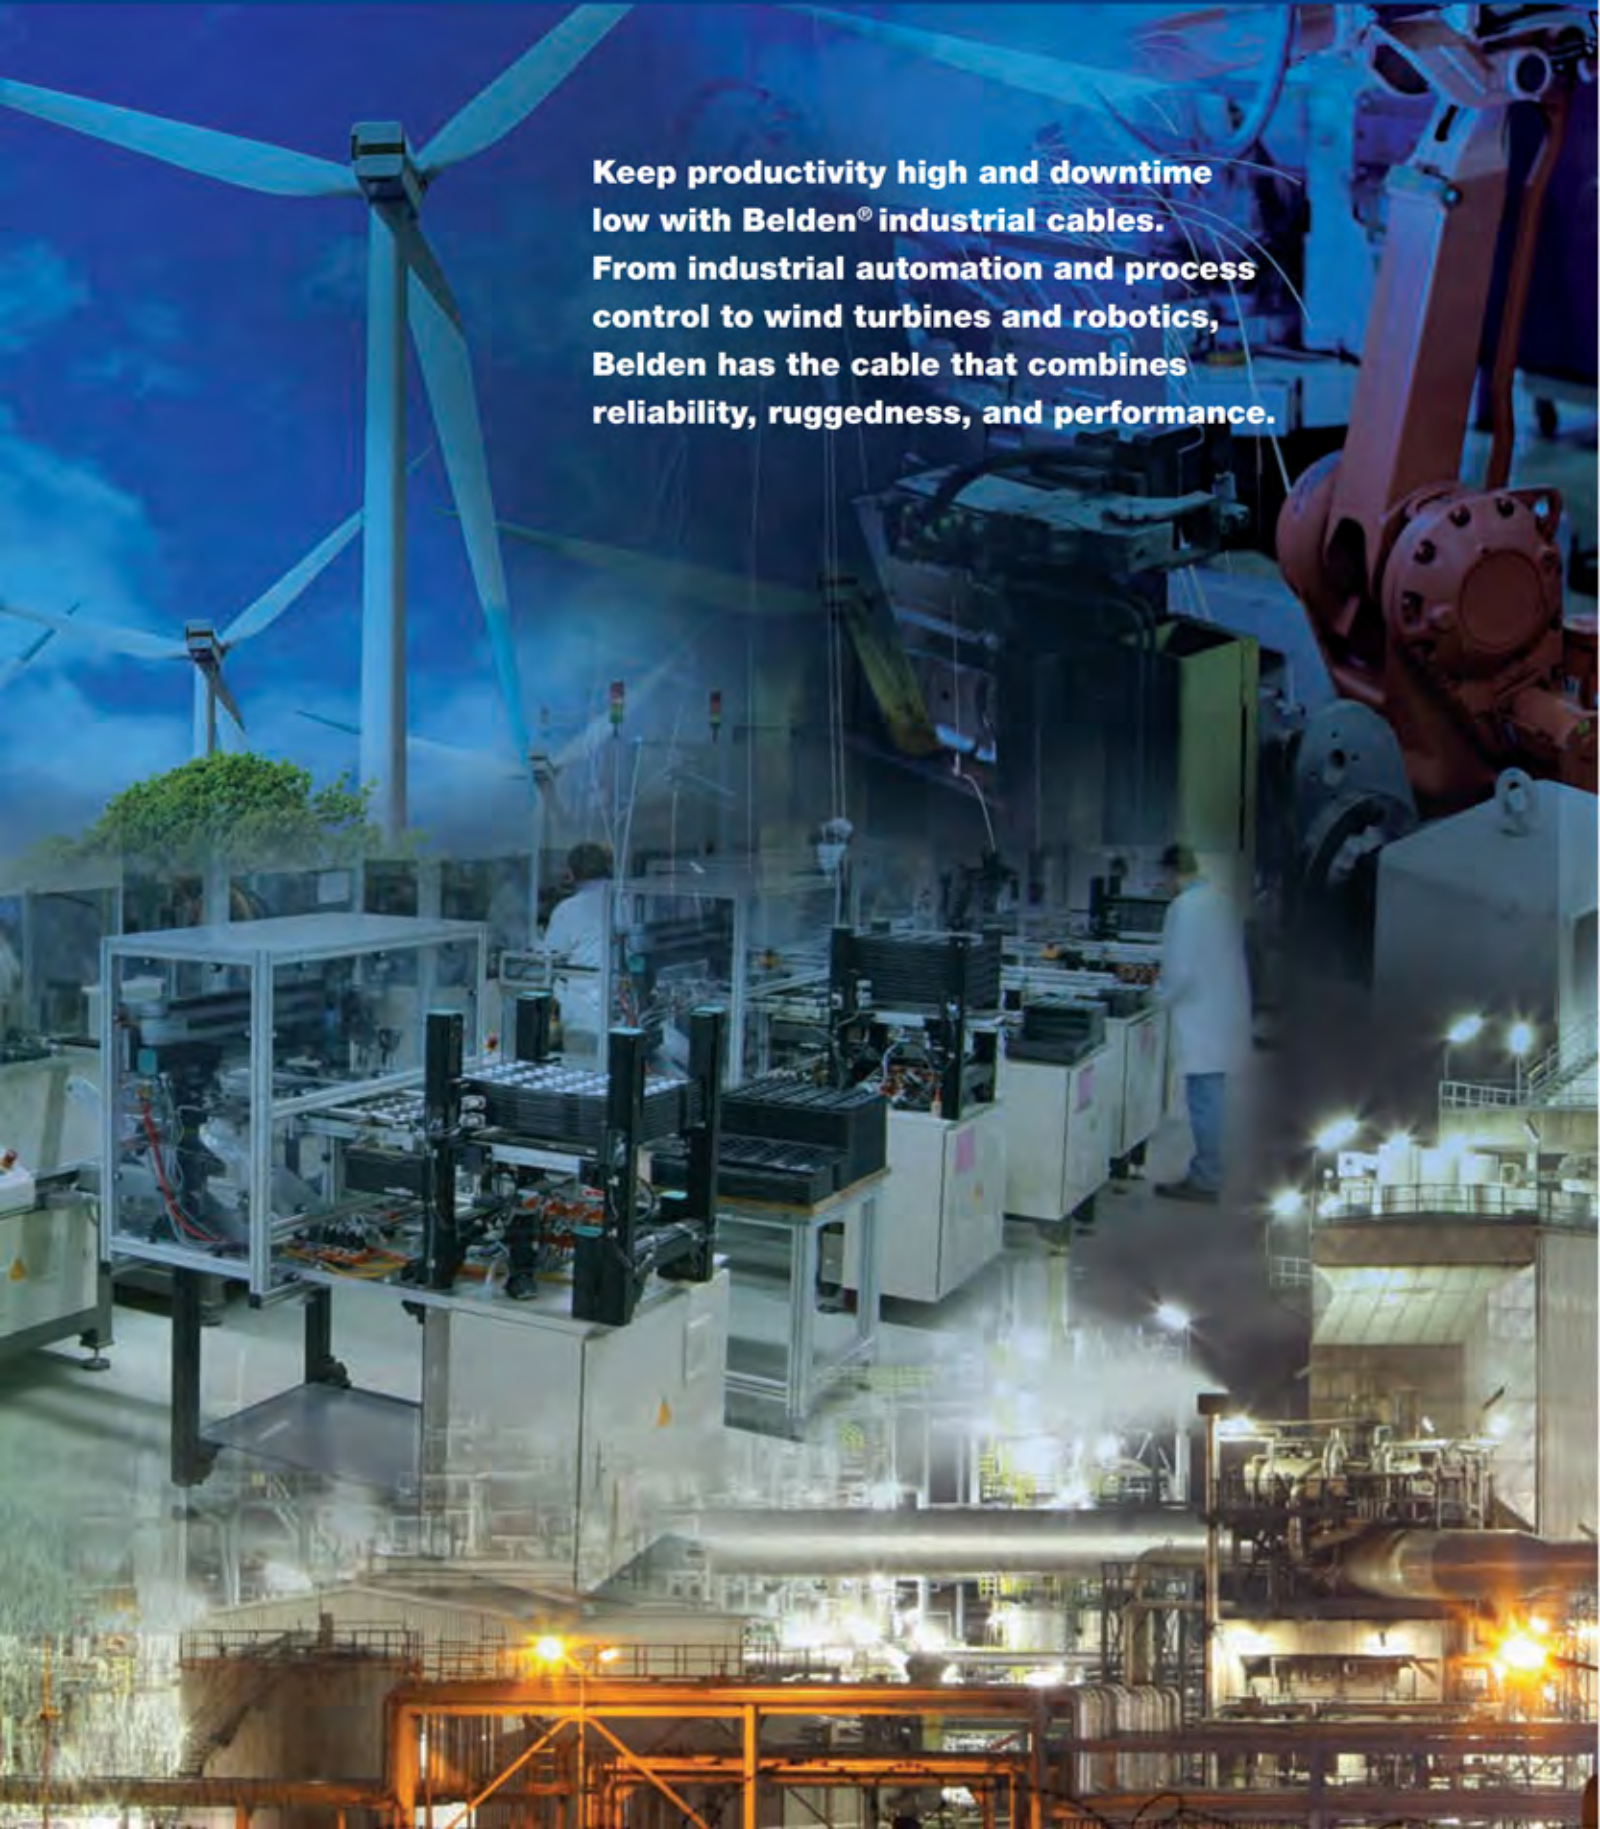



Industrial Cabling Solutions

Table of Contents

Industrial Cabling Solutions	Page No.
Introductory Material	4
Industrial Automation and Control Cables	7
Industrial Ethernet Cable	13
Fiber Optic Cable	22
Fieldbus Paired Cable	31
Industrial Coaxial Cable	40
Industrial Twinax Cable	42
Coaxial Ethernet	45
Interconnect Cable	46
VFD (Variable Frequency Drive) Cable	47
Belden Infinity® Flexible Automation Cable	56
UL Instrumentation Cable	64
Dual Rated UL/CSA Control Cable	103
CSA Instrumentation Cable	106
CSA Control Cable	113
Hook-Up and Lead Wire	127
Multi-Conductor Cables	159
Audio, Control and Instrumentation Cable	161
High Temperature Control and Instrumentation Cable	169
Special Audio, Control and Instrumentation Cable	172
Computer Cable	174
Fire Alarm Cable	178
Circuit Integrity SAFE-T-Line® Cable	181
Computer, Instrumentation and Medical Electronics Cable	184
MIL-W-16878 (Type B) Conductors	185
Security Systems and Duplex Primary Wire	186
Antenna Rotor Cable	187
Rubber SO Power and Control Cable	187
GreenChoice™ LSZH Cable	188
Paired Cables	189
Audio, Control and Instrumentation Cable	198
Special Audio, Control and Instrumentation Cable	217
Computer Cable	219
GreenChoice LSZH Cable	230
Portable Cordage	231
Technical Information	239

Molded Cable Assemblies

For molded cable assemblies, see our Molded Cable Assemblies brochure, available on-line at www.belden.com.

Belden has developed the most comprehensive line of industrial cabling solutions in the world today.

Industrial Wire & Cable

Nobody Does It Better

As a leader in the design and manufacturing of insulated wire and cable for over 110 years, Belden has evolved to a signal transmission solutions provider with a complete product portfolio including cable, connectivity, and networking products.

Signal transmission in industrial environments poses unique challenges, requiring products that are rugged, reliable, and designed specifically for high performance in difficult conditions. Designed and constructed for use in tough, demanding applications, Belden cables hold up to exposure to the harshest conditions: oil, chemicals, ozone, high temperature, physical abuse, and other demanding environments.

Your Challenges. Our Solutions

Increasingly, manufacturing productivity depends on automation and seamless data communication. To support the proliferation of your mission-critical signal transmissions, Belden offers a high-quality, high-availability line of industrial cabling and connectivity products.

Seamless Connectivity from the Sensor to the Enterprise

For the most reliable and robust factory networking, we also offer network switches, I/O modules, and other devices with our GarrettCom, and Lumberg Automation brands. From your petrochemical, automotive manufacturing, pharmaceutical, power generation, water treatment, pulp and paper, food and beverage, or general manufacturing plant to your remote manufacturing locations, various office sites or corporate headquarters—and everywhere within your enterprise—Belden has your particular signal transmission solution.

Be Certain with Belden

You need a signal transmission partner that elicits confidence in the availability, integrity, and performance of its signal transmission solutions for any application, in any type of environment. Only Belden ensures that its products will be available where and when you need them, that they will be of consistent high quality, and that any and all of your service needs will be met.

Belden has developed the most comprehensive line of industrial cabling solutions in the world today. Whether you are networking your factory floor or your process equipment and devices to their controllers and on to the control room, or relaying data between the control room, the engineering department, various office sites or remote manufacturing locations—or operating variable frequency motor drives, continuous motion equipment and other process equipment—Belden has the cabling solution you need.

Since productivity depends on seamless data communications, you can rely on Belden to maximize your uptime—dependably and continuously—no matter how tough your environment might be. Belden products provide the reliability and durability required in virtually every industrial application. No matter how great the challenge, there's a Belden cable product to meet the need.

The Belden Difference

Product Breadth: Find the cable you need from our vast selection of configurations, shielding options, insulation and jacket materials, high-flex capabilities, and other options. From cables for industrial automation and Industrial Ethernet to hook-up wire and multi-conductor cable, connect with Belden.


Product Consistency: Manufactured in ISO certified manufacturing facilities, Belden's state-of-the-art processes ensure quality in each product. Product consistency for ease of termination and assembly is a mainstay of our products. Precise diameter control of insulation and jacket diameters along with concentric wall thickness ensure fast, reliable supplication in high-speed automated equipment.

Shielding: Belden meets the demand for shielding technology with innovative designs in foil and braid configurations for highly effective EMI and RFI protection, and 100% shield coverage for improved protection over a wide frequency range. Our patented Beldfoil design provides electrostatic shielding, while adding strength and extra insulation. The Beldfoil shield is lightweight, strong, flexible, and thin, yet extremely effective.




Bonded-Pair™ Technology:

For optimum performance of paired Industrial Ethernet cable, we bond the conductors in each pair along their longitudinal axis to guarantee uniform spacing throughout the cable. Maintaining a precise geometry is a key factor in maintaining consistent electrical performance by improving balance and return loss performance. The robust design of Bonded-Pair cables virtually eliminates concerns about stretching and bend radius. Bonded-Pair cables boast significantly higher maximum pulling tensions and tighter bend radii over the recommended guidelines to accommodate real-world installation issues.

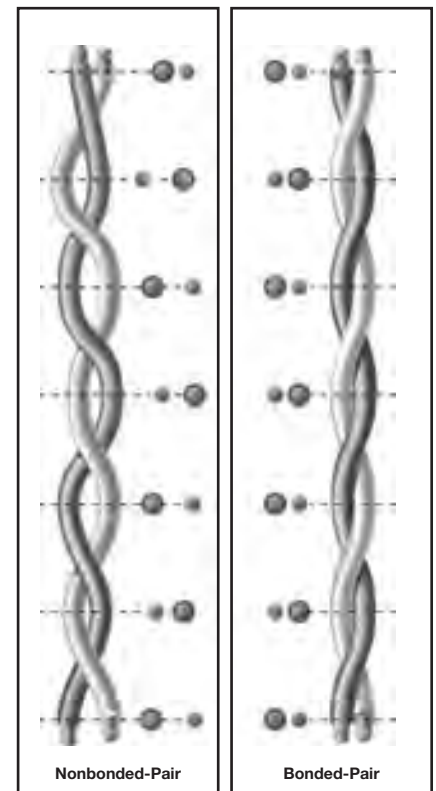

Nonbonded pairs can lose the uniformity of twist that is essential to consistent electrical performance.

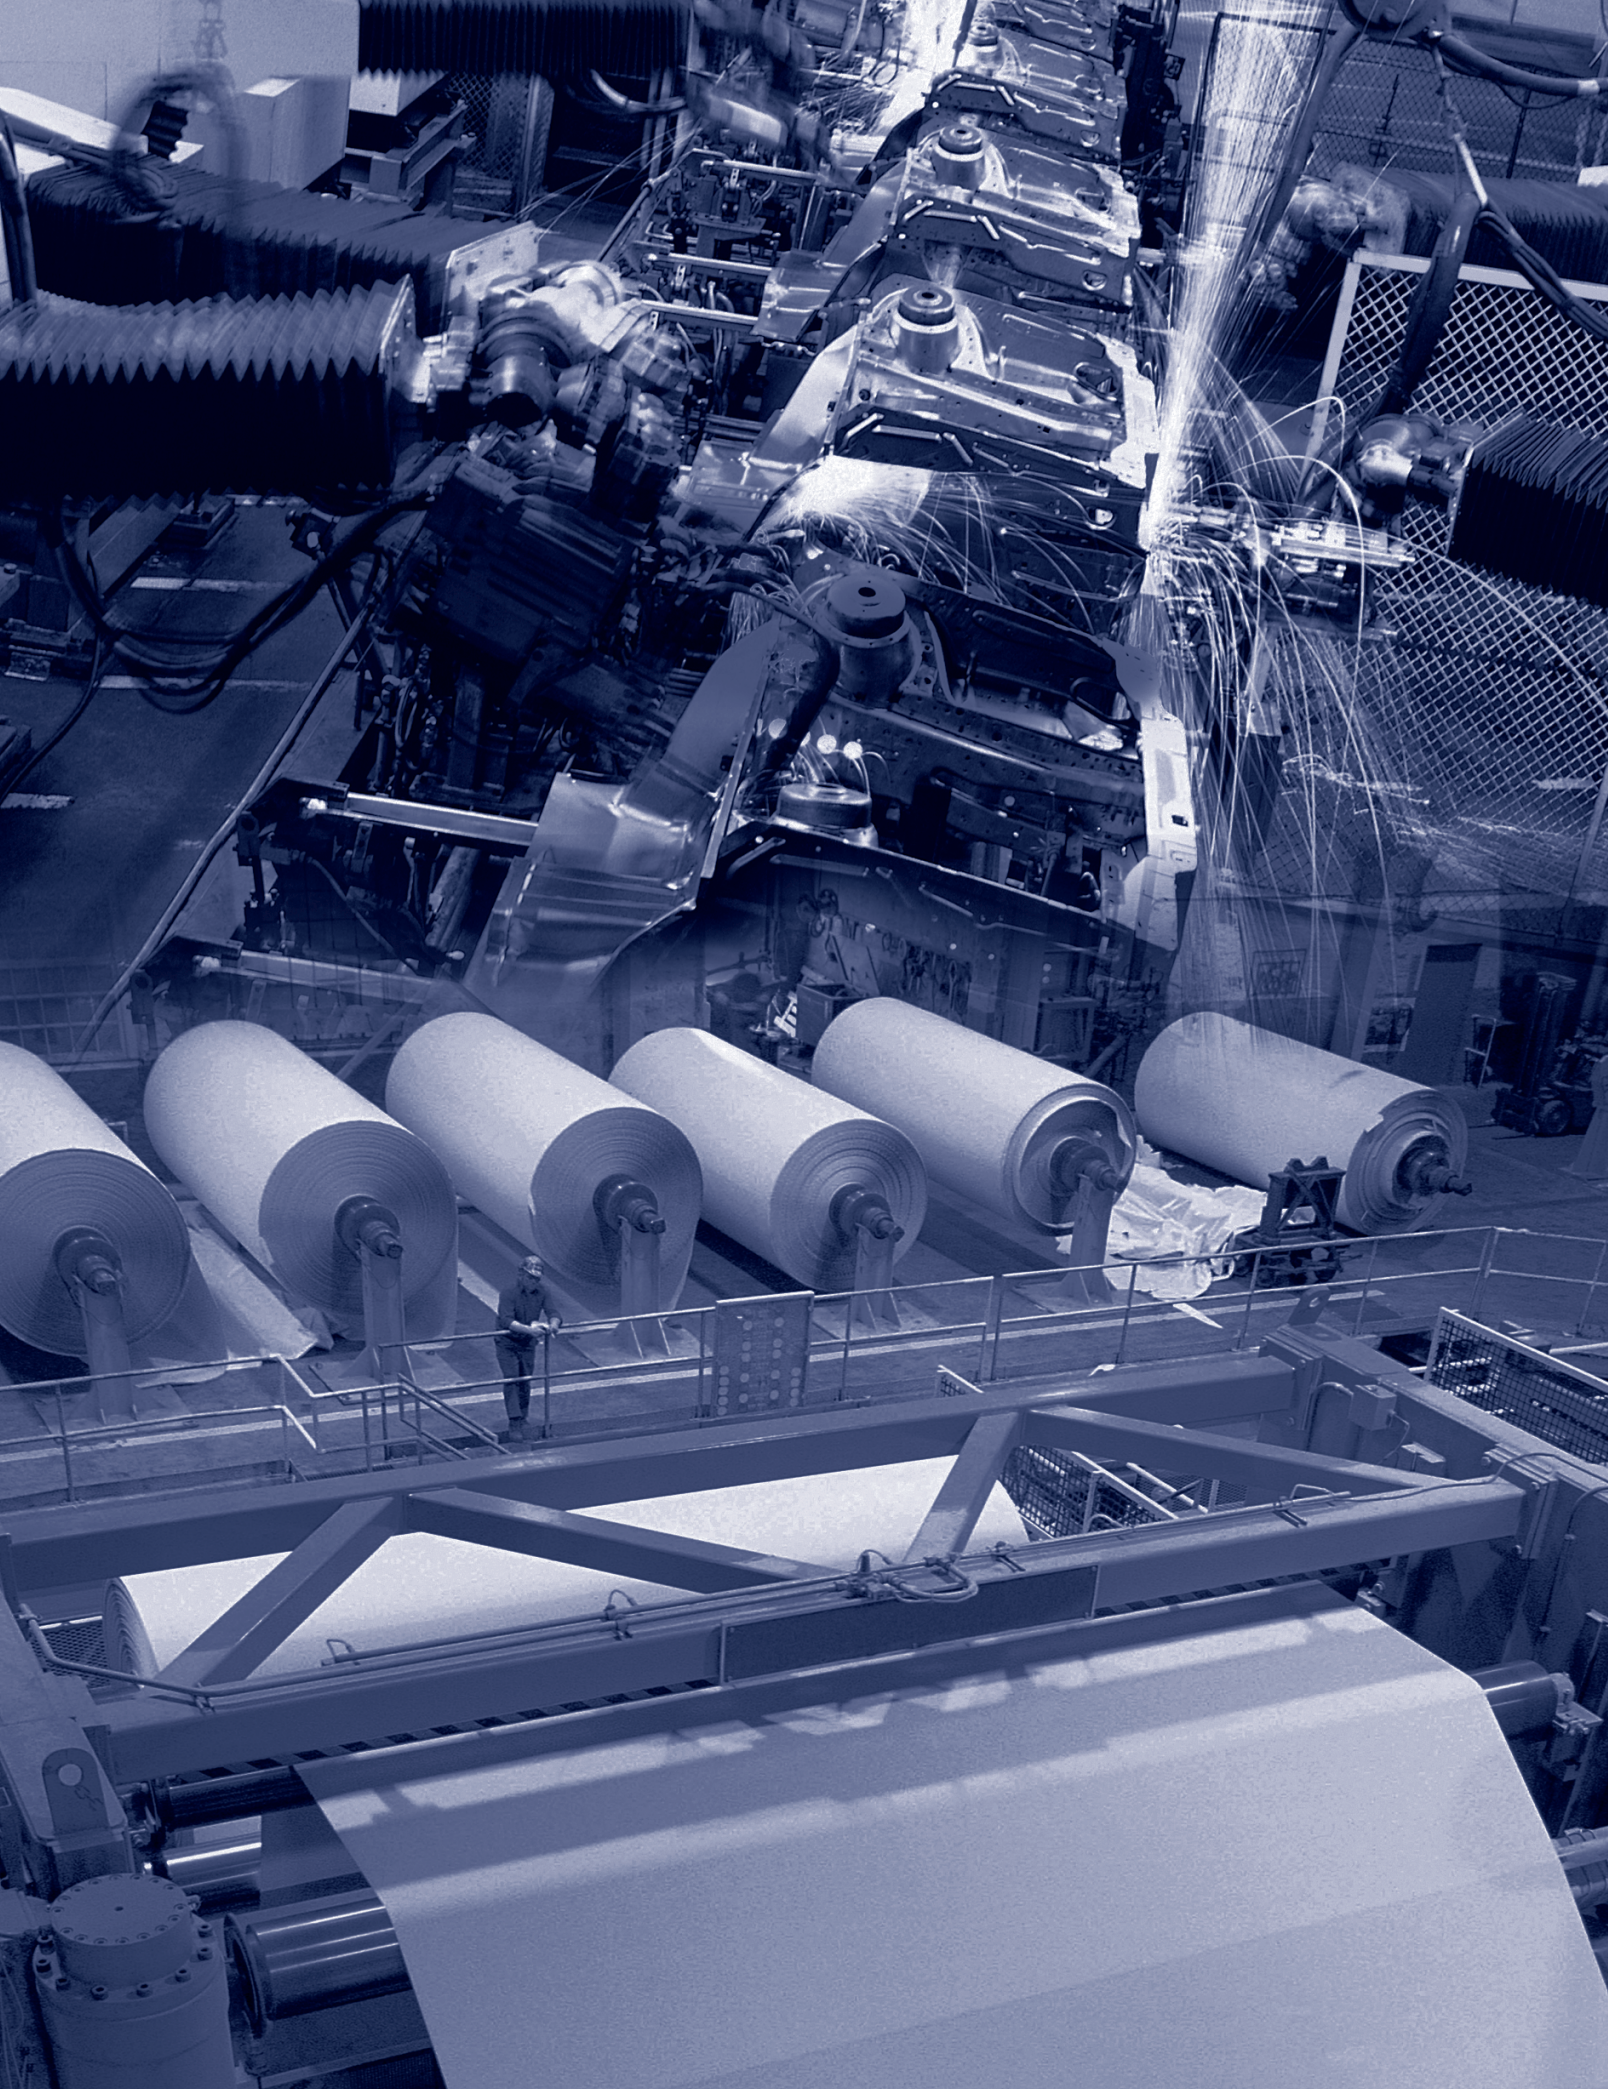



Industrial Automation and Control Cables



Table of Contents

Industrial Automation and Control Cables	Page No.
Introduction	8
PLC/DCS-to-Cable Cross Reference Guide	9
Protocol-to-Cable Cross Reference Guide	12
DataTuff® Industrial Ethernet Cable	13
Cable Selection Guide	14
Category 5e/6 Cable	15
Cordsets	20
Fiber-Optic Cable	22
Industrial Data Solutions® Paired Cable	31
FOUNDATION Fieldbus Cable	31
PROFIBUS Cable	34
RS-485 PLTC /CM	35
DeviceBus® Cable	36
Industrial Coaxial Cable	40
Industrial Twinax Cable	42
Coaxial Ethernet	45
Interconnect Cable	46
VFD Cable	47
Cable Cross Reference Guide	48
Classic and Symmetrical VFD Cable	50
LSZH VFD Cable	52
Armored VFD Cable	54
CSA VFD Cable	55
Belden Infinity® Flexible Automation Cable	56
Application Guide	57
600V C-TC + Control Cables (Extreme Flexing)	58
FCC Control Cable (Moderate Flexing)	60
Shielded Paired Cable	63
75-Ohm Coaxial Cable	63
300V UL Instrumentation Cable	64
300V Power-Limited Tray Cable	65
Thermocouple Extension Cables and Thermocouple Wire	79
600V UL Instrumentation Cable	82
600V Tray Cable	84
600V UL Control Cable	92
600V Type TC Control Cables	93
600V MC Armored Cabled	99
600V Teck Style Cables: Dual-Rated Type MC/TECK 90	103
CSA Instrumentation and Thermocouple Cable	106
300V	106
600V	112
CSA Control and Power Cable	114
CSA 600V ACIC and TECK 90 Multi-Conductor Cable	118
Technical Information	124

Molded Cable Assemblies

For molded cable assemblies, see our Molded Cable Assemblies brochure, available on-line at www.belden.com.

Belden IndustrialTuff® Cables

Introduction

Tough Cables for Tough Environments

Today, more than ever, manufacturing productivity depends upon seamless data communication and automation systems. And both depend upon high-performance cabling solutions.

Depend on Belden

Belden has developed the world's most comprehensive line of industrial cabling solutions for applications like yours: whether you are networking your factory floor or your process equipment and devices to their controllers...and on to the control room, or relaying data between the control room, the engineering department, and remote manufacturing sites—or, all of the above. From your petrochemical, automotive manufacturing, pharmaceutical, power generation, pulp and paper, metals, food and beverage, or general manufacturing plant to your corporate headquarters—and everywhere in between—Belden has your cabling solution.

Most importantly you can have the peace-of-mind that is inherent with the use of Belden products since all Belden cables are manufactured in ISO 9001:2000 certified facilities to the industry's highest standards of quality, using the most advanced equipment, systems, controls and processes available.

Belden cables give you the performance you need day after dependable day.

Innovative Technology

Bonded-Pair™ Cable

Many DataTuff® Industrial Ethernet cables feature Belden's patented bonded-pair technology. Bonded-pairs provide *Installable Performance*®—superior electrical performance even after the stresses of installation. Bonded-pairs exhibit the most robust and reliable electrical performance in the industry.

Shielding

Effective cable shielding for protection from noise interference remains critical with evolving industrial technology. Belden's shielding designs and testing methods ensure signal integrity and a dependable cable in the presence of electrical noise.

Belden's exclusive patented Beldfoil® design, with its aluminum/polyester foil, was the first shield to offer 100 percent cable protection against radiated emission and ingress at audio and radio frequencies.

Armoring

Belden's innovative armoring technology delivers maximum physical protection in harsh environments. Additional benefits include reduced cost of conduit, easier installation and re-routing, plus additional shielding.

Belden has the capability to protect data, electronic, instrumentation and control cables with interlocking steel or aluminum armor as well as continuous corrugated aluminum armor. Smooth or corrugated protective metal tapes are also available.

Insulation and Jacket

Belden formulates many of its own insulation and jacket compounds. As a result, they provide superior performance under a variety of hostile environmental conditions. See "Technical Information" on pages 125–126 for further details.

Intrinsically Safe Wiring

In accordance with NEC Article 504, intrinsically safe cables are colored blue for easy identification. Belden offers several industrial cables in intrinsically safe blue to meet your requirements for intrinsically safe wiring. Contact the NEC and/or your local inspector for specific guidelines.

Custom Capabilities

Most of our industrial cables are available from stock. Many of these are available off the shelf from distributors. If you have a new or unusual application or you cannot find an Industrial cable in this catalog section that meets your technical requirements, contact Technical Support at 1-800-BELDEN-1.

Overall Jacket

Prefix	Material
1	PVC
3	CPE
4	TPE
5	HDPE
6	Oil Res. II
7	Haloarrest® (LSZH)

Armor

Prefix	Material
2	Aluminum Interlock
3	Steel Interlock
4	Aluminum Belclad®
5	Steel Belclad
6	Copper Belclad
8	Continuous Armor

Example: 343016 is cable part no. 3016 with CPE outer jacket and aluminum Belclad armoring.

PLC/DCS Cable Cross Reference Guide

PLC/DCS Manufacturer	System Name	Belden Part Number		
ABB/Bailey Controls	FOUNDATION Fieldbus	See Protocol listings on page 12		
	Industrial IT 800 X A	9880	Network Trunk Cable	
	Infinet	9880	Network Trunk Cable	
		9463	Blue Hose® (Standard)	
	Masterpiece 200	9880	Network Trunk Cable	
		9907	Thin Network Trunk Cable	
	MICRO-DCI	3105A	1-Pair, RS-485	
	MICROLINK	9860	Twinax, 16 AWG, 124 Ohm	
	Modcell	3105A	1-Pair, RS-485	
	PROFIBUS DP & PA	See Protocol listings on page 12		
Allen-Bradley/ Rockwell Automation	ControlNet™	See Protocol listings on page 12		
	DeviceNet™	See Protocol listings on page 12		
	DH, DH+, Remote I/O	9463	Blue Hose (Standard)	
		9463F	Flexible Version (9463)	
		129463	Aluminum Armor (9463)	
		139463	Steel Armor (9463)	
		189463	Continuous Armor (9463)	
		9463DB	Direct Burial (9463)	
		3072F	600V TC Rated (9463)	
	DH-485	89463	FEP 200°C, Plenum	
		3074F	600V Tray Cable	
		3106A	1.5-Pair, RS-485 (PLTC)	
	Industrial Ethernet	9842	2-Pair, RS-485	
		See Protocol listings on page 12		
	Longline Communications	8723	Interface Cable	
88723		Plenum Version		
Cutler-Hammer/ Westinghouse	I/Q System	9463	Blue Hose (Standard)	
	See Protocol listings on page 12			
Emerson Process Management (Fisher/Rosemont Systems) — Delta V	DeviceNet	See Protocol listings on page 12		
	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12		
	HART	See Protocol listings on page 12		
	Industrial Ethernet	See Protocol listings on page 12		
	Modbus	See Protocol listings on page 12		
	PROFIBUS DP	See Protocol listings on page 12		
	Provox Plus	3091A	RG-11 Quad Shield PVC	
		3131A	RG-6 Quad Shield PVC	
	RS-485	See Protocol listings on page 12		
	GE Fanuc — I/O Bus	DeviceNet	See Protocol listings on page 12	
9030, 9070		9182	Communications Bus	
PAC System		89182	Plenum Version	
INTERBUS®-S		See Protocol listings on page 12		
Modbus®		See Protocol listings on page 12		
PROFIBUS		See Protocol listings on page 12		

PLC/DCS Manufacturer	System Name	Belden Part Number		
GE Fanuc — Sensor Device Networks	DeviceNet	See Protocol listings on page 12		
	SDS	See Protocol listings on page 12		
Honeywell	Access 4000 System	9248	RG-6 PVC	
	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12		
	IPC 620 System I/O	9271	Twinax, 25 AWG, 124 Ohm	
	IPC 620 System	9729	Up to 4,000 ft.	
	Serial Interface	9182	Up to 10,000 ft.	
		89182	Plenum	
	Series C	RS-485	FOUNDATION Fieldbus Industrial Ethernet	
	3000 UCN & LCN	3131A	RG-6 Quad Shield PVC	
		3094A	RG-11 Quad Shield PVC	
	Honeywell Microswitch Division	Smart Distributed System	3086A	Mini
3087A			Micro	
1346F			1 Pair 22 AWG, 1 Pair 24 AWG	
1348F			3 20 AWG	
1349F			3 20 AWG, 2 18 AWG	
See Protocol listings on page 12				
Invensys/ Foxboro	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12		
	I/A Series Carrier Band	8233	Small Trunk	
		3095A	Plenum	
		9290	Drop Cable	
	I/A Series Fieldbus	9207	Twinax	
		89207	200°C, Plenum	
		3073F	600V Tray Cable	
	I/A Series Node Bus	9880	Trunk Cable	
		89880	Plenum Version	
	Industrial Ethernet	See Protocol listings on page 12		
Limitorque	DCC100	3105A	Actuator Bus Cable, 1-Pair, RS-485	
Matsushita	FP Series C-NET	9207	Twinax, 20 AWG, Stranded, 100 Ohm	
		9860	Twinax, 16 AWG, Solid, 124 Ohm	
	FP Series MEWNET-F	9207	Twinax, 20 AWG, Stranded, 100 Ohm	
		9860	Twinax, 16 AWG, Solid, 124 Ohm	
	FP Series MEWNET-H	9248	RG-6, 75 Ohm, 18 AWG	
	FP Series MEWNET-TR	9207	Twinax, 20 AWG, Stranded, 100 Ohm	
		9860	Twinax, 16 AWG, Solid, 124 Ohm	
	FP Series MEWNET-W	9207	Twinax, 20 AWG, Stranded, 100 Ohm	
		9806	4-Pair, RS-232, RS-422	
	FP Series MEWNET-W2	9207	Twinax, 20 AWG, Stranded, 100 Ohm	
9860		Twinax, 16 AWG, Solid, 124 Ohm		
FP Series TRNET	9207	Twinax, 20 AWG, Stranded, 100 Ohm		
	9860	Twinax, 16 AWG, Solid, 124 Ohm		

FEP = Fluorinated Ethylene-propylene

PLC/DCS Cable Cross Reference Guide *(continued)*

PLC/DCS Manufacturer	System Name	Belden Part Number	
Mitsubishi Electric Automation	CC-Link	See Protocol listings on page 12	
	DeviceNet	See Protocol listings on page 12	
	Melsecnet II (10/10H)	1505A	Precision RG-59/U Coax
		1505F	High-Flex 1505A
		1506A	Plenum Precision RG-59/U, Outdoor, Direct Burial
		8241	Standard RG-59/U Coax
		8241F	High-Flex 8241F
	Modbus	See Protocol listings on page 12	
	PROFIBUS DP	See Protocol listings on page 12	
	Serial Communications	8777 Control and Instrumentation Interconnect Cable	
Modicon/Schneider AEG	Industrial Ethernet	See Protocol listings on page 12	
	Modbus	8777	Modem Drop Cable, 22 AWG, 3-Pair
		128777	Aluminum Armor (8777)
		138777	Steel Armor (8777)
		88777	FEP 200°C, Plenum
	Modbus II	3092A	RG-6 Quad Shield PVC
		3132A	RG-6 Quad Shield, 150°C, Plenum
		3092F	RG-6 Quad Shield PVC, Flexible Version
		123092A	Aluminum Armor (3092A)
		133092A	Steel Armor (3092A)
Remote I/O	3092A	RG-6 Quad Shield PVC	
	3092F	RG-6 Quad Shield PVC, Flexible Version	
	123092A	Aluminum Armor (3092A)	
	133092A	Steel Armor (3092A)	
	123092F	Aluminum Armor, RG-6 Quad Shield PVC	
	3132A	RG-6 Quad Shield, 150°C, Plenum	
	3094A	RG-11 Quad Shield PVC	
	123094A	Aluminum Armor (3094A)	
	133094A	Steel Armor (3094A)	
	3095A	RG-11 Quad Shield, 150°C, Plenum	
Omron	ComboBus/D (DeviceNet™)	See DeviceNet Protocol listings on page 12	
	ComboBus/S	9409	18 AWG, 1-Pair, 300V PLTC Control
		9318	18 AWG, 1-Pair, 300V PLTC Control, Shielded
		3073	600V Tray Cable, Twinax
		89740	18 AWG, 1-Pair, 300V, Control

PLC/DCS Manufacturer	System Name	Belden Part Number	
Omron <i>(continued)</i>	Controller Link	9207	Twinax
		89207	Twinax, 200°C, Plenum
		9815	Twinax, 100 Ohm, Direct Burial
		3073F	600V Tray Cable, Twinax
		3073F	600V Tray Cable, Twinax
	SYSBUS-2	3073F	600V Tray Cable, Twinax
	SYSMAC BUS	9841	22 AWG, 1-Pair, RS-485
		3105A	22 AWG, 1-Pair, RS-485
	SYSMAC LINK	9231	RG-59U Coax
	Phoenix Contact	DeviceNet	See Protocol listings on page 12
Industrial Ethernet		See Protocol listings on page 12	
INTERBUS®-S		See Protocol listings on page 12	
PROFIBUS DP FMS & PA		See Protocol listings on page 12	
Reliance/A-B	Auto Max Distributed Power	B9B012	2-Fiber Breakout
		I100255	2-Fiber Loose Tube PVC
		I100266	2-Fiber Loose Tube CPE
	R-Net	9259	RG-59 PVC
		89259	RG-59, 200°C, Plenum
Rotork	Pakscan II E RS-485	3105A 22 AWG, 1-Pair, RS-485	
Siemens/Moore	FMC (Field Mountable Controller)	3105A	1-Pair, RS-485
		3106A	1.5-Pair, RS-485
		3107A	2-Pair, RS-485
		3108A	3-Pair, RS-485
		3109A	4-Pair, RS-485
	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12	
	Hiway	9860	Network Trunk Cable
	Industrial Ethernet	See Protocol listings on page 12	
	MODULNET	3094A	RG-11 Quad Shield PVC
		3131A	RG-6 Quad Shield PVC
PROFIBUS DP & FMS (Purple)	See Protocol listings on page 12		
PROFIBUS PA (Blue)	See Protocol listings on page 12		
SINEC Series H1	9907	Thin Network Trunk Cable	
	9880	Network Trunk Cable	
SINEC Series H2B	3131A	RG-6 Quad Shield	
	3094A	RG-11 Quad Shield	
SINEC Series L1	3107A	2-Pair, RS-485	
SINEC Series L2	3079A	300V Twinax	
Thicknet Ethernet Trunk	9880	Network Trunk Cable	
	129880	Aluminum Interlocked Armor Trunk	
	139880	Steel Interlocked Armor Trunk	
Thinnet Ethernet Trunk	9907	Thin Network Trunk Cable	

FEP = Fluorinated Ethylene-propylene



PLC/DCS Cable Cross Reference Guide *(continued)*

PLC/DCS Manufacturer	System Name	Belden Part Number		
Smar	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12		
	Industrial Ethernet	See Protocol listings on page 12		
	PROFIBUS DP FMS & PA	See Protocol listings on page 12		
	RS-485	See Protocol listings on page 12		
Square D/ Schneider AEG	FIP/Fieldbus	3079A	22 AWG, 1-Pair, Shielded	
		123079A	Aluminum Armor (3079A)	
	Industrial Ethernet	See Protocol listings on page 12		
	Model 50, RS-422 Cable	8760	18 AWG, 1-Pair, Shielded	
		128760	Aluminum Armor (8760)	
	Passport I/O – I/O Net	3105A	22 AWG, 1-Pair, RS-485	
		123105A	Aluminum Armor (3105A)	
		3106A	22 AWG, 1.5-Pair, RS-485	
		123106A	Aluminum Armor (3106A)	
	Power Logic	9841	24 AWG, 1-Pair, RS-485	
		9842	24 AWG, 2-Pair, RS-485	
	Square D/ Schneider AEG	Seriplex®	3124A	CBL-1822-P20
			3125A	CBL-1622-P16
			3126A	CBL-162212-P16
123124A			Aluminum Armor (3124A)	
123125A			Aluminum Armor (3125A)	
123126A			Aluminum Armor (3126A)	
9463			Blue Hose® (Standard)	
9463F			Flexible Version (9463)	
129463			Aluminum Armor (9463)	
139463			Steel Armor (9463)	
189463			Continuous Armor (9463)	
YR28826			Dual Version (9463)	
9463DB			Direct Burial (9463)	
YR29565			Various Color Jackets 9463)	
SY/Net Network Trunk Cable	3072F	600V TC Rated (9463)		
	89463	FEP 200°C, Plenum		
SY/Net TNIM Cable	9272	20 AWG, 1-Pair, Shielded		
	89272	FEP 200°C, Plenum		

PLC/DCS Manufacturer	System Name	Belden Part Number	
Yokogawa— CENTUM	DeviceNet™	See Protocol listings on page 12	
	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12	
	HART	See Protocol listings on page 12	
	Industrial Ethernet	See Protocol listings on page 12	
	PROFIBUS	See Protocol listings on page 12	
Yokogawa— FA-M3	RS-485	See Protocol listings on page 12	
	DeviceNet	See Protocol listings on page 12	
	Industrial Ethernet	See Protocol listings on page 12	
	Modbus	See Protocol listings on page 12	
	PROFIBUS	See Protocol listings on page 12	
Yokogawa— STARDOM	RS-485	See Protocol listings on page 12	
	DeviceNet	See Protocol listings on page 12	
	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	See Protocol listings on page 12	
	HART	See Protocol listings on page 12	
	Industrial Ethernet	See Protocol listings on page 12	
Westinghouse	PROFIBUS	See Protocol listings on page 12	
	RS-485	See Protocol listings on page 12	
	WDPF	9292	RG-11 PVC

FEP = Fluorinated Ethylene-Propylene.
 ControlNet is a ControlNet International, Ltd. trademark.
 DeviceNet is an Open DeviceNet Vendor Association, Inc. trademark.
 EtherNet/IP is a ControlNet International, Ltd. trademark, under license by Open DeviceNet Vendor Association, Inc.
 HART is a HART Communication Foundation trademark.
 INTERBUS is a Phoenix Contact trademark.
 Modbus is a Schneider Electric trademark.
 PROFIBUS is a PROFIBUS International trademark.
 PROFINET is a PROFIBUS International trademark.
 SDS is a Honeywell International, Inc. trademark.
 Seriplex is a Square D/Schneider AEG trademark.

Protocol Cable Cross Reference Guide

System Name	Belden Part Number	
ControlNet™	3092A	RG-6 PVC Quad Shield
	3092F	RG-6 PVC Quad Shield, Flex Version, Aluminum Braid
	YR28890	RG-6 PVC Quad Shield, Flex Version, Copper Braid
	3093A	RG-6 FEP Quad Shield, Plenum
	123092A	Aluminum Armor (3092A)
	133092A	Steel Armor (3092A)
	183092A	Continuous Armor (3092A)
	DataHighway (DH) & DataHighway Plus (DH+) Remote I/O	9463
3072F		600V, TC Blue Hose
9463DB		Direct Burial Blue Hose
9463F		High-Flex, Blue Hose
89463		High-Temp, Plenum Blue Hose
129463		Aluminum Armor (9463)
139463		Steel Armor (9463)
189463		Continuous Armor (9463)
DeviceNet™	3082A	PVC (Thick)
	3082F	High-Flex (Thick)
	3082K	CL2 (Flat)
	3082KP	Auxiliary Power (Flat)
	3083A	CPE (Thick)
	3084A	PVC (Thin)
	3084F	High-Flex (Thin)
	3085A	CPE (Thin)
	7895A	CL2 PVC (Cable III Mid)
	7896A	CL1 PVC (Type V Trunk Cable)
	7897A	CL1 PVC (Thick)
	7900A	CL1 Unshielded (Drop Cable IV)
	FOUNDATION Fieldbus (Type SP50 ISA/IEC)	3076F
3077F		Type B, H1 1200m (31.25K)
1335A		Type A Compliant (16 AWG)
1336A		Type A Compliant (14 AWG)
HSE		Copper & Fiber See Industrial Ethernet
Industrial Ethernet	7958A	Cat 5e, 4-Pair, Bonded, Shielded, AWM
	7957A	Cat 5e, 4 Pair, Bonded, Shielded (Foil + Braid), AWM
	7953A	Cat 6, 4-Pair, Shielded, FRPO Inner Jacket
	7936A	Cat 5e, 4-Pair, Bonded, Shielded, LSZH
	7937A	Cat 5e, 4-Pair, Bonded, Shielded, Halogen Free, Direct Burial
	7939A	Cat 5e, 4-Pair, Bonded, Shielded, Stranded
	7938A	Cat 5e, 4-pair, Bonded, Shielded, High Flex
	7940A	Cat 6, 4-Pair, Bonded
	7953A	Cat 6, 4-Pair, Shielded, FRPO Inner Jacket

System Name	Belden Part Number		
Industrial Ethernet (continued)	11700A	Cat 5e, 4-Pair, Bonded, Upjacketed	
	11700A2	Cat 5e, 4-Pair, Bonded, Upjacketed, Oil Res II	
	121700A	Cat 5e, 4-Pair, Bonded, Armored	
	7919A	Cat 5e, 4-Pair, Shielded	
	7921A	Cat 5e, 4-Pair, Bonded, Shielded (Foil + Braid)	
	7927A	Cat 6, 4-Pair, Bonded	
	7931A	Cat 6, 4-Pair, Bonded, Gas Res, High + Low Temperature	
	11872A	Cat 6, 4-Pair, Bonded, Upjacketed	
	121872A	Cat 6, 4-Pair, Bonded, Armored	
	INTERBUS®-S	3119A	18 AWG/3c, 24 AWG/3-Pair, Composite
3120A		24 AWG/3-Pair	
IronWorks®	8471	16 AWG, 1-Pair, UL AWM 2598	
	8917	16 AWG, 1-Cond, UL AWM 1015	
	85102	16 AWG, 2-Cond, VW1, Plenum	
Modbus	8777	22 AWG, 3-Pair, Modem Drop Cable	
	128777	Aluminum Armor (8777)	
	138777	Steel Armor (8777)	
	88777	FEP 200°C, Plenum (8777)	
PROFIBUS DP & FMS (Purple)	3079A	22 AWG 300V Twinax	
	3079E	22 AWG 300V Twinax, Flex Version	
	183079A	22 AWG, 30V, Twinax, Armored	
PROFIBUS PA (Blue)	3076F	18 AWG, 2-Conductors, Type A	
	183076F	18 AWG, 2-Conductors, Type A, Armored	
RS-485/HART/ CANopen	9841	1-Pair	
	82841	1-Pair, Plenum	
	89841	1-Pair, Plenum, High-Temperature	
	9842	2-Pair	
	82842	2-Pair, Plenum	
	9843	3-Pair	
	9844	4-Pair	
	7200A	1-Pair, RS-485, Hi-Flex	
	7201A	2-Pair, RS-485, Hi-Flex	
	7202A	3-Pair, RS-485, Hi-Flex	
	7203A	4-Pair, RS-485, Hi-Flex	
	7206A	1-Pair, RS-485, Hi-Flex	
	3105A	1-Pair, RS-485 (PLTC)	
	3106A	1.5-Pair, RS-485 (PLTC)	
3107A	2-Pair, RS-485 (PLTC)		
3108A	3 Pair, RS-485 (PLTC)		
3109A	4 Pair, RS-485 (PLTC)		
Seriplex®	3124A	1-Pair 18 AWG, 1-Pair 22 AWG	
	3125A	1-Pair 16 AWG, 1-Pair 22 AWG	
	3126A	1-Pair 16 AWG, 1-Pair 22 AWG, 1-Pair 12 AWG	
	123124A	Aluminum Armor (3124A)	
	123125A	Aluminum Armor (3125A)	
	123126A	Aluminum Armor (3126A)	
	Smart Distributed System (SDS)	3086A	1-Pair 16 AWG, 1-Pair 20 AWG
		3087A	2-Pair 22 AWG
1346F		1-Pair 22 AWG, 1 Pair 24 AWG	
1348F		3 20 AWG	
1349F		3 20 AWG, 2 18 AWG	

FEP = Fluorinated Ethylene-propylene • FRPO = Flame Retardant Polyolefin

Industrial Data Solutions® – DataTuff® Industrial Ethernet Cables

Overview

Breadth of Line: Category 5e and Category 6 Cables

- Most cables use Bonded-Pair™ technology
- Unshielded or shielded cables
- Solid or stranded conductors
- Plenum or non-plenum
- Polyolefin or FEP insulation
- PVC, polyethylene, FEP, or TPE jackets
- Heavy duty, double jacketed, or aluminum armored
- Halogen-free or Low Smoke Zero Halogen constructions
- Versions suitable for burial or outdoor use, gasoline resistance, high and low temperatures
- Jackets sequentially marked at regular intervals (typically 2 ft)
- Performance third-party verified to ANSI/TIA-568-B.2

Field-Proven Performance for Such Conditions as:

- Oil, sunlight and gasoline
- Temperature variations
- Abrasion and crushing
- Flexing
- EMI/RFI presence
- Weldsplatter resistance

Approvals

- All RoHS approved
- Many are EtherNet/IP compliant
- Some MSHA approved for mining environments


Belden's Patented Bonded-Pair Technology

Most DataTuff cables feature Belden's Bonded-Pair technology, a patented cable construction which affixes the conductor insulation of the cable pairs along their longitudinal axes to ensure that no performance-robbing gaps can develop between the conductor pairs.

- No gaps between the conductor pairs ensures that the conductor-to-conductor spacing, or centricity, is always uniform
- With uniform centricity, the cable offers excellent and consistently reliable electrical performance
- Installable Performance® is achieved—the affixing of the insulation of the cable pairs and the uniform centricity translate to superior electrical performance, even after the cable has been subjected to the bending, pulling and twisting inherent in the installation process

Tests Prove the Post-Installation Effectiveness of Belden Bonded-Pair Cables

Belden performed tests that simulate the effects of the installation process, both on an industry-leading 350 MHz Cat 5e cable (a nonbonded-pair cable) and a Belden 350 MHz Cat 5e bonded-pair cable. For comparison, the cables were tested both right off the reel and after an installation stress test. Results showed that the nonbonded-pair cable had an RL degradation greater than 12 dB—over 15 times worse than its before-installation value. The Bonded-Pair cables showed greater integrity in maintaining RL performance.

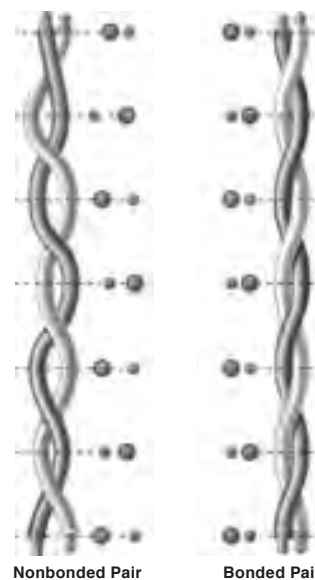

DataTuff® Industrial Ethernet Cable Selection Guide

This table is meant to help you select the proper cable.


Part No.	Conductor		Installation		Environmental										Industrial Grade Jacket		
	Solid	Stranded	Installation Stress Resistance*	Pull Tension	Oil Res.	UV Sun Res.	Weld-splatter Res.	CMX-Outdoor	Direct Burial	Gas Res.	LSZH	MSHA	Hi/Low Temp.	600V AWM	Heavy	Upjacket	Armored
Category 6 Shielded Cable																	
7953A <i>EtherNet/IP</i>	•		•	40	•	•		•						•		•	
Category 6 Unshielded Cable																	
7940A <i>EtherNet/IP</i>	•		•	40	•	•		•							•		
7927A	•		•	45	•	•									•		
11872A	•		•	45												•	
121872A	•		•	200		•											•
7931A	•		•	40	•	•				•			•		•		
Category 5e Shielded Cable																	
7929A	•		•	40	•	•		•				•			•		
7958A <i>EtherNet/IP</i>	•		•	35	•	•							•		•		
7919A	•			25	•	•		•				•			•		
7939A		•	•	40	•	•									•		
7921A <i>EtherNet/IP</i>	•		•	75	•	•		•							•		
7957A <i>EtherNet/IP</i>	•		•	75	•	•		•					•		•		
7937A	•		•	40	•	•			•							•	
7936A	•		•	40		•					•	•			•		
7938A High Flex		•	•	40	•	•	•									•	
Category 5e Unshielded Cable																	
7923A <i>EtherNet/IP</i>	•		•	40	•	•		•				•			•		
7922A PLTC	•		•	40	•	•		•							•		
7918A	•			35	•	•		•				•			•		
11700A <i>EtherNet/IP</i>	•		•	40	•	•		•				•				•	
11700A2 Oil Res. I/II	•		•	40	•	•										•	
121700A	•		•	40	•	•											•
121700R	•		•	40	•	•											•
7924A		•	•	40	•	•		•							•		
7930A				25	•	•		•							•		
7934A <i>EtherNet/IP</i>	•		•	40	•	•			•						•		
7935A <i>EtherNet/IP</i>	•		•	40		•					•				•		
7928A <i>EtherNet/IP</i>	•		•	40	•	•		•		•			•		•		
2-Pair Category 5e Shielded Cable																	
7933A <i>EtherNet/IP</i>	•		•	20	•	•									•		
2-Pair Category 5e Unshielded Cable																	
7932A <i>EtherNet/IP</i>	•		•	20	•	•									•		

*Products with Bonded-Pair™ technology provide Installable Performance® advantages; refer to Belden's Bonded-Pair Cable Bulletin BP02.

Industrial Data Solutions® – Industrial Ethernet

Category 6 DataTuff® Cables

Category 6 • Shielded and Unshielded • 4-Pair



- Compatible with Belden Metal Body RJ45 Plugs R301601 and R301602
- Bonded Pairs

Part No.	AWG	Nominal OD		Jacket Thickness		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		
Solid BC Conductors • Polyolefin Insulation • Flame-Resistant Polyolefin Inner Jacket • Overall Beldfoil® Shielding • PVC Outer Jacket							
7953A	23	.340	8.64	.030	.76	-40 to +75	600V UL AWM Shielded EtherNet/IP Compliant NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • PVC Jacket							
7940A	23	.250	6.35	.030	.76	-40 to +75	EtherNet/IP Compliant NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
7927A	23	.251 x .339	6.38 x 8.61	.030	.76	-40 to +75	E-Spline Center Member for Mechanical Protection Tested to 600 MHz NEC: CMR • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • PVC Inner Jacket • PVC Outer Jacket							
11872A	23	.475 x .265	12.07 x 6.73	.035	.76	-40 to +75	Upjacketed NEC: CM • CEC: CM FT1 Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • PVC Inner Jacket • Interlocked Aluminum Armor • PVC Outer Jacket							
121872A	23	.684	17.37	.055	1.39	-40 to +75	Armored NEC: CM • CEC: HL, CMG FT4 Sunlight Resistant Bonded Pairs
Solid BC Conductors • FEP Insulation • FEP Jacket							
7931A	23	.214	5.44	.030	.76	-70 to +150	High and Low Temp NEC: Limited Combustible FHC 25/50, CMP • CEC: CMP FT6 Oil Res I/II • Gas Res Sunlight and Oil Resistant Bonded Pairs

Conductor Color Codes: Pair 1: White/Blue Stripe & Blue • Pair 2: White/Orange Stripe & Orange • Pair 3: White/Green Stripe & Green • Pair 4: White/Brown Stripe & Brown

All reels of Bonded Pair cable come with bonded pair separator tool (part no. 1797B)
 EtherNet/IP is a trademark of ODVA. To learn more visit <http://www.belden.com/products/industrialcable/ethernet-ip.cfm>
 BC = Bare Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Ethernet

Category 5e DataTuff® Cables

Category 5e • Shielded • 4 Pair



- Compatible with Belden Metal Body RJ45 Plugs R301601 and R301602

Part No.	AWG	Nominal OD		Jacket Thickness		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		
Solid BC Conductors • Polyolefin Insulation • Overall Beldfoil® Shielding • PVC Jacket							
7929A	24	.265	6.73	.030	.76	-40 to +75	NEC: CMR, CMX-Outdoor • CEC: CMR FT4 MSHA Approved* Sunlight and Oil Resistant Bonded Pairs
7958A	24	.265	6.73	.030	.76	-40 to +75	600V UL AWM EtherNet/IP Compliant NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
7919A	24	.265	6.73	.030	.76	-40 to +75	NEC: CMR, CMX-Outdoor • CEC: CMR FT4 MSHA Approved* Sunlight and Oil Resistant CMX-Outdoor
Stranded (7 x 32) BC Conductors • Polyolefin Insulation • Overall Beldfoil Shielding • PVC Jacket							
7939A	24	.315	8.60	.030	.76	-40 to +75	Flexible NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • Overall Beldfoil + 70% TC Braid Shielding • PVC Jacket							
7921A	24	.330	8.38	.030	.76	-40 to +75	Heavy Shielded EtherNet/IP Compliant NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
7957A	24	.330	8.38	.030	.76	-40 to +75	600V UL AWM Heavy Shielded EtherNet/IP Compliant NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs

Conductor Color Codes: Pair 1: White/Blue Stripe & Blue • Pair 2: White/Orange Stripe & Orange • Pair 3: White/Green Stripe & Green • Pair 4: White/Brown Stripe & Brown

*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification

All reels of Bonded Pair cable come with bonded pair separator tool (part no. 1797B)
BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Ethernet

Category 5e DataTuff® Cables

Category 5e • Shielded • 4 Pair



- Compatible with Belden Metal Body RJ45 Plugs R301601 and R301602

Part No.	AWG	Nominal OD		Jacket Thickness		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		
Solid BC Conductors • Polyolefin Insulation • PE Inner Jacket • Overall Beldfoil® + 70% TC Braid Shielding • PE Outer Jacket							
7937A	24	.276	7.01	.030	.76	-40 to +75	Waterblocked Burial Upjacketed Heavy Shielded Halogen Free Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • Overall Beldfoil Shielding • LSZH Jacket							
7936A	24	.265	6.73	.030	.76	-10 to +75	Low Smoke, Halogen Free NEC: CM • CEC: CMG FT4 Sunlight Resistant Bonded Pairs
Stranded (7 x 32) Copper Alloy Conductors • Polyolefin Insulation • TPE Inner Jacket • Overall Beldfoil + 85% TC Braid Shielding • TPE Outer Jacket							
7938A	24	.344	8.74	.030	.76	-40 to +80	10 Million Continuous Flex Cycles Weldsplatter Resistant CEC: FT1 Sunlight and Oil Resistant Bonded Pairs AWM 20626

Conductor Color Codes: Pair 1: White/Blue Stripe & Blue • Pair 2: White/Orange Stripe & Orange • Pair 3: White/Green Stripe & Green • Pair 4: White/Brown Stripe & Brown

*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification

All reels of Bonded Pair cable come with bonded pair separator tool (part no. 1797B)
 BC = Bare Copper • TC = Tinned Copper • LSZH = Low Smoke Zero Halogen • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Ethernet

Category 5e DataTuff® Cables

Category 5e • Unshielded • 4 Pair



- Compatible with Belden Metal Body RJ45 Plugs R301601 and R301602

Part No.	AWG	Nominal OD		Jacket Thickness		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		
Solid BC Conductors • Polyolefin Insulation • PVC Jacket							
7923A	24	.230	5.84	.030	.76	-40 to +75	EtherNet/IP Compliant MSHA Approved* NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
7922A	22	.301	7.65	.030	.76	-25 to +75	UL PLTC NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
7918A	24	.230	5.84	.030	.76	-40 to +75	MSHA Approved* NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant
Solid BC Conductors • Polyolefin Insulation • PVC Inner and Outer Jackets							
11700A	24	.285	7.24	.035	.89	-40 to +75	Upjacketed EtherNet/IP Compliant MSHA Approved* NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
11700A2	24	.285	7.24	.035	.89	-10 to +75	Upjacketed Oil Res I/II NEC: CMR • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • PVC Inner Jacket • Interlocked Aluminum Armor • PVC Outer Jacket							
121700A	24	.530	13.46	.045	1.14	-40 to +75	Armored NEC: CM • CEC: HL, CMG FT4 Sunlight and Oil Resistant Bonded Pairs
121700R	24	.530	13.46	.045	1.14	-40 to +75	Armored -40°C Cold Impact NEC: CM • CEC: HL, CMG FT4 Sunlight and Oil Resistant Bonded Pairs
Stranded (7 x 32) TC Conductors • Polyolefin Insulation • PVC Jacket							
7924A	24	.242	5.84	.030	.76	-40 to +75	Flexible NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
Stranded (7 x 32) BC Conductors • Polyolefin Insulation • PVC Jacket							
7930A	24	.240	5.84	.030	.76	-25 to +75	Flexible NEC: CMR, CMX-Outdoor • CEC: CMR FT4 Sunlight and Oil Resistant

Conductor Color Codes: Pair 1: White/Blue Stripe & Blue • Pair 2: White/Orange Stripe & Orange • Pair 3: White/Green Stripe & Green • Pair 4: White/Brown Stripe & Brown

*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification

All reels of Bonded Pair cable come with bonded pair separator tool (part no. 1797B)
EtherNet/IP is a trademark of ODVA. To learn more visit <http://www.belden.com/products/industrialcable/ethernet-ip.cfm>
BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Ethernet

Category 5e DataTuff® Cables


Category 5e • Unshielded • 4 Pair



- Compatible with Belden Metal Body RJ45 Plugs R301601 and R301602

Part No.	AWG	Nominal OD		Jacket Thickness		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		
Solid BC Conductors • Polyolefin Insulation • Polyethylene Jacket							
7934A	24	.230	5.84	.030	.76	-40 to +75	Waterblocked Burial Halogen Free EtherNet/IP Compliant Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • LSZH Jacket							
7935A	24	.230	5.84	.030	.76	-40 to +75	Low Smoke, Halogen Free EtherNet/IP Compliant NEC: CM • CEC: CM FT1 Sunlight Resistant Bonded Pairs
Solid BC Conductors • FEP Insulation • FEP Insulation							
7928A	24	.187	4.75	.030	.76	-70 to +150	High and Low Temp EtherNet/IP Compliant NEC: CMP • CEC: CMP FT6 Oil Res I/II • Gas Res Sunlight and Oil Resistant Bonded Pairs

Category 5e • Unshielded and Shielded • 2 Pair



- Compatible with M12 Connectors
- Bonded Pairs

Part No.	AWG	Nominal OD		Jacket Thickness		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		
Solid BC Conductors • Polyolefin Insulation • Overall Beldfoil® Shielding • PVC Jacket							
7933A	24	.227	5.77	.030	.76	-40 to +75	Shielded EtherNet/IP Compliant NEC: CMR • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs
Solid BC Conductors • Polyolefin Insulation • PVC Jacket							
7932A	24	.207	5.26	.030	.76	-40 to +75	EtherNet/IP Compliant NEC: CMR • CEC: CMR FT4 Sunlight and Oil Resistant Bonded Pairs

Conductor Color Codes: Pair 1: White/Orange Stripe & Orange • Pair 2: White/Green Stripe & Green

All reels of Bonded Pair cable come with bonded pair separator tool (part no. 1797B)
 EtherNet/IP is a trademark of ODVA. To learn more visit <http://www.belden.com/products/industrialcable/ethernet-ip.cfm>
 BC = Bare Copper • TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • LSZH = Low Smoke Zero Halogen • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions®
DataTuff® Industrial Ethernet Cordsets

Category 6 • Standard RJ45 Connectors



- 4-Pair Cable
- 23 AWG Solid BC Conductors
- Heavy-Duty Oil- & Sunlight-Resistant Black Jackets
- NEC: CMR, CMX-Outdoor • CEC: CMR FT4
- IP67 interface complies with the EtherNet/IP specification (IEC 61076-3-106 Variant 1)

Part No.				Length	
Unshielded Belden Bonded-Pair™ Cable 7940A		Shielded Belden Bonded-Pair Cable 7953A			
IP67 (Tethered Cap)	IP 20 (No Cap)	IP67 (Tethered Cap)	IP 20 (No Cap)	Meters	Feet
E600001 010S1	E601001 010S1	E604001 010S1	E605001 010S1	1	3.3
E600002 010S1	E601002 010S1	E604002 010S1	E605002 010S1	2	6.6
E600003 010S1	E601003 010S1	E604003 010S1	E605003 010S1	3	9.8
E600005 010S1	E601005 010S1	E604005 010S1	E605005 010S1	5	16.4
E600025 010S1	—	E604025 010S1	—	25	82

Category 6 • Ruggedized Metal-Body RJ45 Connectors



- 4-Pair Cable
- 23 AWG Solid BC Conductors
- Heavy-Duty Oil- & Sunlight-Resistant Black Jackets
- NEC: CMR, CMX-Outdoor • CEC: CMR FT4

Part No.		Length	
Unshielded Belden Bonded-Pair Cable 7940A	Shielded Belden Bonded-Pair Cable 7953A		
IP 20 (No Cap)	IP 20 (No Cap)	Meters	Feet
R601001 010S1	R605001 010S1	1	3.3
R601002 010S1	R605002 010S1	2	6.6
R601003 010S1	R605003 010S1	3	9.8
R601005 010S1	R605005 010S1	5	16.4

BC = Bare Copper

Industrial Data Solutions®

DataTuff® Industrial Ethernet Cordsets

Category 5e • Standard RJ45 Connectors



- 4-Pair Cable
- Heavy-Duty Oil- & Sunlight-Resistant Black Jackets
- NEC: CMR, CMX-Outdoor • CEC: CMR FT4
- IP67 interface complies with the EtherNet/IP specification (IEC 61076-3-106 Variant 1)

Solid BC Conductors

Part No.				Length	
Unshielded Belden Bonded-Pair™ Cable 7923A		Shielded Belden Bonded-Pair Cable 7929A			
IP67 (Tethered Cap)	IP 20 (No Cap)	IP67 (Tethered Cap)	IP 20 (No Cap)	Meters	Feet
E500001 010S1	E501001 010S1	E504001 010S1	E505001 010S1	1	3.3
E500002 010S1	E501002 010S1	E504002 010S1	E505002 010S1	2	6.6
E500003 010S1	E501003 010S1	E504003 010S1	E505003 010S1	3	9.8
E500005 010S1	E501005 010S1	E504005 010S1	E505005 010S1	5	16.4
E500025 010S1	—	E504025 010S1	—	25	82

Stranded BC Conductors

Part No.				Length	
Unshielded Belden Bonded-Pair Cable 7924A		Shielded Belden Bonded-Pair Cable 7939A			
IP67 (Tethered Cap)	IP 20 (No Cap)	IP67 (Tethered Cap)	IP 20 (No Cap)	Meters	Feet
E502001 010S1	E503001 010S1	E506001 010S1	E507001 010S1	1	3.3
E502002 010S1	E503002 010S1	E506002 010S1	E507002 010S1	2	6.6
E502003 010S1	E503003 010S1	E506003 010S1	E507003 010S1	3	9.8
E502005 010S1	E503005 010S1	E506005 010S1	E507005 010S1	5	16.4
E502025 010S1	—	E506025 010S1	—	25	82

BC = Bare Copper

Industrial Data Solutions®

TrayOptic® Heavy-Duty, All-Dielectric Fiber-Optic Cables
Loose Tube, Indoor/Outdoor Rise and Tray

Applications

- Industrial and other harsh environment applications
- Factory automation
- Direct burial

Product Description

Laser Optimized Fiber to handle Gigabit Ethernet light sources and expanded bandwidth requirements. Passes IEEE 383-2003 flame test. Waterblocking agent for moisture protection. CPE outer jacket option provides extra chemical or abrasion resistance.

Jacket Material	PVC or CPE
Strength Member	Aramid Yarn
Jacket Color	
OM1/2	Orange
OM3/4	Aqua
OS2	Yellow

Ratings

Riser	
UL Type	OFNR
C(UL) Type	OFN FT4
Flame Resistance	IEEE 1202 / 383-2003


Complies to:
TIA/EIA-568-C.3
ICEA S-104-696

Functional Requirements of:
GR-20-CORE
GR-409-CORE

Specifications

Temperature Range	
Storage	-40°C to +70°C
Operating	-40°C to +70°C
Crush Resistance (EIA-455-41)	2000 N/cm
Impact Resistance (EIA-455-25)	2000 impacts @ 1.6 N-cm
Cyclic Flexing (EIA-455-104)	25 cycles (12 lbs @ 20x OD radius min.)
Minimum Bend Radius	
Installation	20 x OD
Long Term	15 x OD
Maximum Installation Load	600 Lbs. (2700 N)

Fiber Bundle Detail

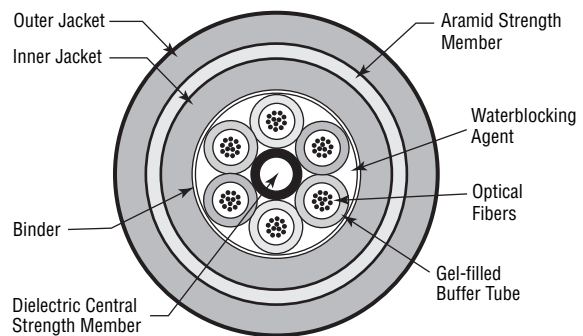

Optical Specifications

Fiber Type	Multimode				Single Mode
	OM1	OM2	OM3	OM4	OS2
Optical Performance @ 850/1300 nm for Multimode Fibers and 1310/1550 nm for Single-Mode Fibers					
Bandwidth (MHz•km), Overfilled Launch	200/500	500/500	1500/500	3500/550	—
Attenuation (dB/km), Loose Tube Cabled	2.9/0.9	3.5/1.2	2.9/0.9	2.9/0.9	0.35/0.25
Link Lengths @ 850/1300 nm for Multimode Fibers and 1310/1550 nm for Single-Mode Fibers					
10/100 Mb/s	2000/—	2000/—	2000/—	2000/—	—
1 Gb/s	300/550	600/600	900/550	1000/550	5000/—
10 Gb/s	32/—	82/—	300/—	550/—	10,000/40,000

Industrial Data Solutions®

TrayOptic® Heavy-Duty, All-Dielectric Fiber-Optic Cables
Loose Tube, Indoor/Outdoor Rise and Tray

PVC Jacket • Riser (NEC/CEC OFNR/OFN FT4)

No. of Fibers	Fibers/ Tube	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
2	2	I100255	I1A0255	I1C0255	I1E0255	I1W0255	.43	11.00
4	4	I100455	I1A0455	I1C0455	I1E0455	I1W0455		
6	6	I100655	I1A0655	I1C0655	I1E0655	I1W0655		
8	4	I400855	I4A0855	I4C0855	I4E0855	I4W0855		
12	6	I601255	I6A1255	I6C1255	I6E1255	I6W1255		
18	6	I601855	I6A1855	I6C1855	I6E1855	I6W1855		
24	6	I602455	I6A2455	I6C2455	I6E2455	I6W2455		
36	6	I603655	I6A3655	I6C3655	I6E3655	I6W3655		
48	12	I604855	I6A4855	I6C4855	I6E4855	I6W4855		
60	12	I606055	I6A6055	I6C6055	I6E6055	I6W6055		
72	12	I607255	I6A7255	I6C7255	I6E7255	I6W7255		

CPE Jacket • Riser (NEC/CEC OFNR/OFN FT4)

No. of Fibers	Fibers/ Tube	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
2	2	I100266	I1A0266	I1C0266	I1E0266	I1W0266	.43	11.00
4	4	I100466	I1A0466	I1C0466	I1E0466	I1W0466		
6	6	I100666	I1A0666	I1C0666	I1E0666	I1W0666		
8	4	I400866	I4A0866	I4C0866	I4E0866	I4W0866		
12	6	I601266	I6A1266	I6C1266	I6E1266	I6W1266		
18	6	I601866	I6A1866	I6C1866	I6E1866	I6W1866		
24	6	I602466	I6A2466	I6C2466	I6E2466	I6W2466		
36	6	I603666	I6A3666	I6C3666	I6E3666	I6W3666		
48	12	I604866	I6A4866	I6C4866	I6E4866	I6W4866		
60	12	I606066	I6A6066	I6C6066	I6E6066	I6W6066		
72	12	I607266	I6A7266	I6C7266	I6E7266	I6W7266		

CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride

Brilliance® Maxi-Bend™ Tactical Fiber Optic Cables

Single-mode and Multimode Fiber

Applications

- ENG vehicles
- Outdoor news, sporting or other events
- Digital camera transmission
- Military communications
- Re-deployable communications
- Mining and industrial applications

Product Description

Small and lightweight with a rugged jacket, Tactical Cable provides a durable design for repeated deployment and retrieval cycles and a superior level of crush resistance. Designed to military standards.

Jacket Material	UV-resistant PU
Buffer	Polyester
Strength Member	Aramid Yarn

Color Code

Jacket	Black
Fiber/Buffer	Per EIA/TIA 598-C
Fiber/Buffer 1	Blue
Fiber/Buffer 2	Orange
Fiber/Buffer 3	Green
Fiber/Buffer 4	Brown
Fiber/Buffer 5	Slate
Fiber/Buffer 6	White
Fiber/Buffer 7	Red
Fiber/Buffer 8	Black
Fiber/Buffer 9	Yellow
Fiber/Buffer 10	Violet
Fiber/Buffer 11	Rose
Fiber/Buffer 12	Aqua


Specifications

Temperature Range	Storage	-70 to +85°C
	Operating	-55 to +85°C
Crush Resistance (EIA-455-41)		440 N/cm
Impact Resistance (EIA-455-25)		200 Impacts @ 2.2 N-m
Cyclic Flexing (EIA-455-104)		2000 cycles, min.
Min. Bend Radius	Installation	15 x OD
	Long Term	8 x OD

Optical Specifications

Single-mode Enhanced*	Operating Wavelength (nm)	1310/1550
	Max. Attenuation Tight Buffered (dB/km)	0.50/0.50
Multimode 62.5/125 μm Std./1Gbe	Operating Wavelength (nm)	850/1300
	Max. Attenuation Tight Buffered (dB/km)	3.50/1.20

*Low water peak Single-mode suitable for CWDM use complies with ITU G.652 d

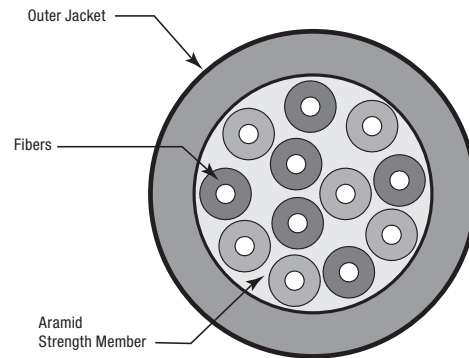

No. of Fibers	Part No.		OD (Nom)	
	OM1 (62.5/125)	OS2 (9/125)	Inch	mm
2	B96571	B96566	.240	6.0
4	B96551	B96639		
6	B96572	B96567	.240	6.1
12	B96575	B96570	.280	7.0

PU = Polyurethane



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Single Jacket, All Dielectric Cable

Loose Tube — Outdoor, and Indoor/Outdoor Riser & LSZH Rated

Applications

- Medium to high fiber count requirements
- Inter-building duct installations
- Lashed aerial
- Indoor/outdoor
- Industrial outside plant (OSP Type)

Product Description

Gel-filled buffer tube prevents water migration. All-dielectric strength member. Available as Riser rated cable, thereby eliminating the need for service entrance splicing to in-building cable. Full dielectric construction, no grounding required. Available with up to 216 fibers. Length markings in meters for easy determination of cable length.

Jacket Material	
Outdoor	PE
Riser	PVC
Buffer Tube	PBT
Strength Member	Aramid Yarn
Central Strength Member	E-Glass
Color Code (Buffer)	Per TIA/EIA 598-B
Jacket Color	Black

Ratings

Riser	
UL Type	OFNR
C(UL) Type	OFN FT.4
Flame Resistance	UL 1666


Complies to:
TIA/EIA-568-C.3
ICEA S-87-640

Functional Requirements of:
GR-20-CORE
GR-409-CORE

Specifications

Temperature Range (Outdoor Series)	
Storage	-40 to +75°C
Operating	-40 to +70°C
Temperature Range (Riser Series)	
Storage	-40 to +75°C
Operating	-40 to +70°C
Min. Bend Radius	
Installation	20 x OD
Long Term	15 x OD
Optical Specifications	See page 22

Fiber Bundle Detail

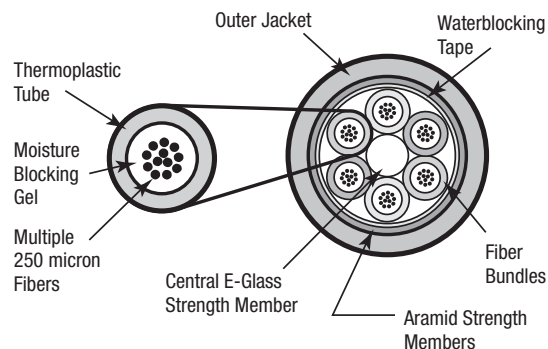

Single Jacket, All Dielectric Cable *(continued)*

Loose Tube – Outdoor, and Indoor/Outdoor Riser Rated

Loose Tube Series

No. of Fibers	Fibers/ Bundle	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
Outdoor								
6	6	B9B510T	B9A510T	B9C510T	B9E510T	B9W510T		
12	12	B9B511T	B9A511T	B9C511T	B9E511T	B9W511T		
24	12	B9B500T	B9A500T	B9C500T	B9E500T	B9W500T	.41	10.5
36	12	B9B502T	B9A502T	B9C502T	B9E502T	B9W502T		
48	12	B9B505T	B9A505T	B9C505T	B9E505T	B9W505T		
72	12	B9B507T	B9A507T	B9C507T	B9E507T	B9W507T	.45	11.5
96	12	B9B513T	B9A513T	B9C513T	B9E513T	B9W513T	.52	13.2
144	12	B9B509T	B9A509T	B9C509T	B9E509T	B9W509T	.67	17.0
216	12	B9B520T	B9A520T	B9C520T	B9E520T	B9W520T	.69	17.4
Riser (NEC/CEC OFNR/OFN FT.4) Indoor/Outdoor								
6	6	B9B810	B9A810	B9C810	B9E810	B9W810		
12	12	B9B811	B9A811	B9C811	B9E811	B9W811		
24	12	B9B812	B9A812	B9C812	B9E812	B9W812	.51	12.9
36	12	B9B813	B9A813	B9C813	B9E813	B9W813		
48	12	B9B814	B9A814	B9C814	B9E814	B9W814		
72	12	B9B815	B9A815	B9C815	B9E815	B9W815	.54	13.7
96	12	B9B816	B9A816	B9C816	B9E816	B9W816	.61	15.5
144	12	B9B817	B9A817	B9C817	B9E817	B9W817	.76	19.3

Alternative fiber counts are available.

Loose Tube Indoor/Outdoor Fiber Optic Cable

No. of Fibers	Fibers/ Bundle	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
LSZH (NEC/CEC OFNR/OFN FT.4) Indoor/Outdoor								
6	6	B9B830	B9A830	B9C830	B9E830	B9W830		
12	12	B9B831	B9A831	B9C831	B9E831	B9W831		
24	12	B9B832	B9A832	B9C832	B9E832	B9W832	.38	9.65
36	12	B9B833	B9A833	B9C833	B9E833	B9W833		
48	12	B9B834	B9A834	B9C834	B9E834	B9W834	.48	12.18

LSZH = Low Smoke Zero Halogen



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Single Jacket, All Dielectric Cable

Loose Tube – (Gel-free) Indoor/Outdoor Plenum Rated

Applications

- Medium to high fiber count requirements
- Inter-building duct installations
- Lashed aerial
- Indoor/outdoor
- Campus backbones
- Data Centers
- High Density Cable Trays

Product Description

Dry waterblocking technology used within tubes and under jacket. Available as Plenum rated cable, thereby eliminating the need for service entrance splicing to in-building cable. Small diameter and bend radius facilitate installation in tight spaces. Full dielectric construction, no grounding required. Available with up to 144 fibers. Fibers grouped into sets of 12 for maximum density. Length markings in meters for easy determination of cable length.

Jacket Material	Non-unitized Unitized	Thermoplastic PVDF-Copolymer
Buffer Tube		Thermoplastic
Strength Member		E-Glass and Aramid Yarn
Central Strength Member		Upjacketed
Color Code (Fiber)		Per TIA/EIA 598-B
Jacket Color		Black
Functional Requirements of:	GR-20-CORE GR-409-CORE	

Ratings


Plenum	UL Type C(UL) Type Flame Resistance	OFNP OFN FT.6 NFPA 262
---------------	-------------------------------------------	------------------------------

Complies to:
TIA/EIA-568-C.3
ICEA S-104-696

Specifications

Temperature Range	Storage Operating Installation	-40 to +80°C -40 to +70°C 0 to +60°C
Cyclic Flexing (EIA-455-104)		2000 cycles, min.
Min. Bend Radius	Installation Long Term	20 x OD 15 x OD
Optical Specifications		See page 22

Fiber Bundle Detail

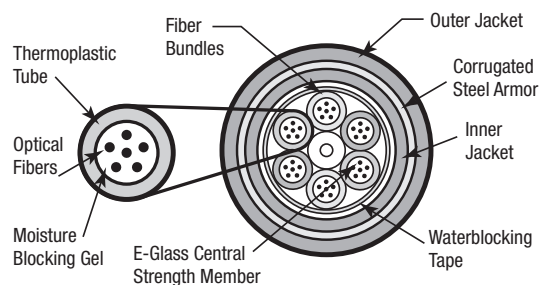

Loose Tube Series

No. of Fibers	Fibers/ Bundle	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
Plenum (NEC/CEC OFNP/OFN FT.6) Indoor/Outdoor								
6	6	B9B202	B9A202	B9C202	B9E202	B9W202	.265	6.70
12	12	B9B204	B9A204	B9C204	B9E204	B9W204		
24	12	B9B205	B9A205	B9C205	B9E205	B9W205		
36	12	B9B206	B9A206	B9C206	B9E206	B9W206	.359	9.12
48	12	B9B207	B9A207	B9C207	B9E207	B9W207		
72	12	B9B209	B9A209	B9C209	B9E209	B9W209	.429	10.90
96	12	B9B211	B9A211	B9C211	B9E211	B9W211	.501	12.73
144	12	B9B215	B9A215	B9C215	B9E215	B9W215	.665	16.89

Alternative fiber counts and hybrid constructions are available.

PVDF = Polyvinylidene Fluoride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Double Jacket, Armored Cable (OSP Type)

Loose Tube — Outdoor, and Indoor/Outdoor Riser Rated

Loose Tube Series—Armored

No. of Fibers	Fibers/ Bundle	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
Outdoor								
6	6	B9B381T	B9A381T	B9C381T	B9E381T	B9W381T		
12	12	B9B382T	B9A382T	B9C382T	B9E382T	B9W382T		
24	12	B9B384T	B9A384T	B9C384T	B9E384T	B9W384T	.62	15.5
36	12	B9B386T	B9A386T	B9C386T	B9E386T	B9W386T		
48	12	B9B389T	B9A389T	B9C389T	B9E389T	B9W389T		
72	12	B9B391T	B9A391T	B9C391T	B9E391T	B9W391T	.65	16.4
96	12	B9B398T	B9A398T	B9C398T	B9E398T	B9W398T	.72	18.2
144	12	B9B393T	B9A393T	B9C393T	B9E393T	B9W393T	.90	22.9
Riser (NEC/CEC OFCR/OFD FT.4) Indoor/Outdoor								
6	6	B9B890	B9A890	B9C890	B9E890	B9W890		
12	12	B9B891	B9A891	B9C891	B9E891	B9W891		
24	12	B9B892	B9A892	B9C892	B9E892	B9W892	.54	13.7
36	12	B9B893	B9A893	B9C893	B9E893	B9W893		
48	12	B9B894	B9A894	B9C894	B9E894	B9W894		
72	12	B9B895	B9A895	B9C895	B9E895	B9W895	.66	16.8
96	12	B9B896	B9A896	B9C896	B9E896	B9W896	.70	17.8
144	12	B9B897	B9A897	B9C897	B9E897	B9W897	.88	22.4

Additional armor/jacket configurations are available including Single and Triple jacket with armor.

Armor types include steel/aluminum corrugated, steel/aluminum interlock, and glass yarn rodent resistant.

Double Jacket, Heavy-Duty Cable

Loose Tube – Outdoor

Applications

- Direct burial
- Harsh environments
- Applications requiring good Ozone-, moisture-, and weather-resistance

Product Description

Gel-filled buffer tube prevents water migration. Available with up to 216 fibers.

Jacket Material	
Outer Jacket:	PE
Inner Jacket:	PE
Buffer Tube	PBT
Strength Member	Aramid Yarn
Central Strength Member	E-Glass
Core Wrap	Water Swellable Tape
Color Code (Buffer)	Per TIA/EIA 598-B
Jacket Color	Black

Ratings


Complies to:
TIA/EIA-568-C.3
ICEA S-87-640

Functional Requirements of:
GR-20-CORE

Specifications

Temperature Range	
Storage	-40 to +75°C
Operating	-40 to +70°C
Min. Bend Radius	
Installation	20 x OD
Long Term	15 x OD
Optical Specifications	See page 22

Fiber Bundle Detail

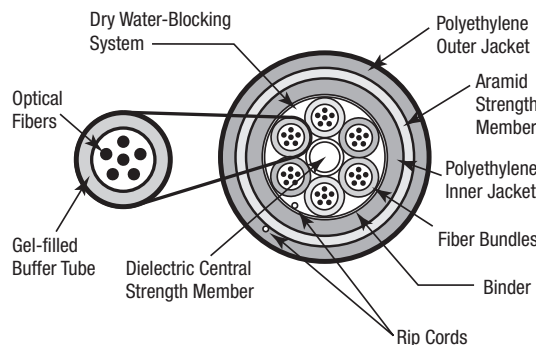

Loose Tube Series—Heavy Duty

No. of Fibers	Fibers/ Bundle	Part No.					OD (Nom)	
		OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
Outdoor								
2	2	B9B840	B9A840	B9C840	B9E840	B9W840		
4	4	B9B841	B9A841	B9C841	B9E841	B9W841		
6	6	B9B842	B9A842	B9C842	B9E842	B9W842		
12	12	B9B844	B9A844	B9C844	B9E844	B9W844		
18	12	B9B845	B9A845	B9C845	B9E845	B9W845	.49	12.5
24	12	B9B846	B9A846	B9C846	B9E846	B9W846		
36	12	B9B847	B9A847	B9C847	B9E847	B9W847		
48	12	B9B848	B9A848	B9C848	B9E848	B9W848		
72	12	B9B849	B9A849	B9C849	B9E849	B9W849	.53	13.4
96	12	B9B820	B9A820	B9C820	B9E820	B9W820	.60	15.2
144	12	B9B821	B9A821	B9C821	B9E821	B9W821	.75	19.0
216	12	B9B822	B9A822	B9C822	B9E822	B9W822	.76	19.3

PBT = Polybutylene Terephthalate • PE = Polyethylene

Central Tube Cable

Loose Tube – Outdoor, and Outdoor Armored

Applications

- Campus OSP backbones
- Drop cable
- Telecommunications and data trunk
- Direct burial (armored only)
- Lashed aerial

Product Description

Economical option for low fiber counts. Quick and easy end preparation. Fully waterblocked with gel-filled buffer tube. No rods—easy handling. Crush, impact and abrasion resistant.


Jacket Material	PE
Buffer Tube	PBT
Core Wrap	Water Swellable Tape
Strength Member	Fiberglass
Armor	Corrugated Steel
Color Codes (Jacket and Fibers)	Per TIA/EIA 598-B
Jacket Color	Black

Functional Requirements of:
GR-20-CORE

Specifications

Temperature Range	Storage	-40 to +75°C
	Operating	-40 to +70°C
Min. Bend Radius	Installation	20 x OD
	Long Term	15 x OD
Optical Specifications	See page 22	

Fiber Bundle Detail

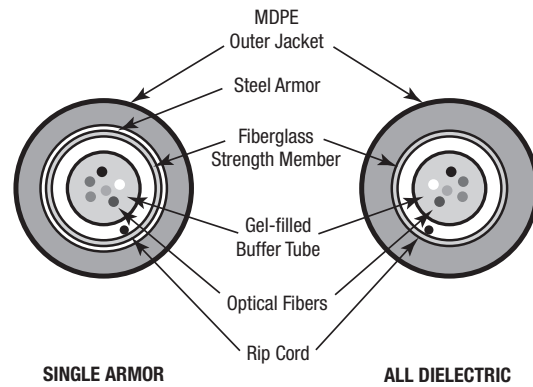

Central Tube Series

No. of Fibers	Part No.					OD (Nom)	
	OM1 (62.5/125)	OM2 (50/125)	OM3 (50/125)	OM4 (50/125)	OS2 (9/125)	Inch	mm
Outdoor							
2	B9B150	B9A150	B9C150	B9E150	B9W150	.31	7.8
4	B9B151	B9A151	B9C151	B9E151	B9W151		
6	B9B152	B9A152	B9C152	B9E152	B9W152		
8	B9B153	B9A153	B9C153	B9E153	B9W153		
10	B9B154	B9A154	B9C154	B9E154	B9W154		
12	B9B155	B9A155	B9C155	B9E155	B9W155		
24	B9B159	B9A159	B9C159	B9E159	B9W159		
Outdoor Armored							
2	B9B170	B9A170	B9C170	B9E170	B9W170	.48	12.2
4	B9B171	B9A171	B9C171	B9E171	B9W171		
6	B9B172	B9A172	B9C172	B9E172	B9W172		
8	B9B173	B9A173	B9C173	B9E173	B9W173		
10	B9B174	B9A174	B9C174	B9E174	B9W174		
12	B9B175	B9A175	B9C175	B9E175	B9W175		
24	B9B179	B9A179	B9C179	B9E179	B9W179		

PBT = Polybutylene Terephthalate • PE = Polyethylene

Industrial Data Solutions® – Paired Cable

FOUNDATION Fieldbus

FOUNDATION Fieldbus Type A



Part No.	AWG	Voltage	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
				Inch	mm		
Stranded (7 x 26) TC Conductors • Polyolefin Insulation • TC Drain Wire • Beldfoil® Shielding • Orange PVC Jacket							
3076F	18	300	1	.253	6.43	-50 to +105	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 Sunlight Res Oil Res IEC 60332-3-24 (Cat C)
Stranded (7 x 26) TC Conductors • Polyolefin Insulation • TC Drain Wire • Beldfoil + 65% TC Braid Shielding • PVC Inner Jacket • Armor • Orange PVC Outer Jacket							
183076F	18	300	1	.562	14.30	-40 to +105	FOUNDATION Fieldbus Type A Continuously Corrugated Aluminum Armor NEC: CMX-Outdoor Sunlight Res Oil Res
Stranded (7 x 26) TC Conductors • Polyolefin Insulation • TC Drain Wire • Individually Foil Shielded Pairs + Overall Beldfoil Shielding • Orange PVC Jacket							
1327A			2	.44	11.18		
1328A			5	.55	13.87		
1329A			8	.67	17.02		
1330A	18	300	12	.81	20.57	-40 to +105	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 Sunlight Res Oil Res IEC 60332-3-24 (Cat C)
1331A			16	.92	23.37		
1332A			20	1.02	25.91		
1333A			24	1.14	28.96		
1359A			50	1.61	40.90		
Stranded (7 x 26) TC Conductors • Polyolefin Insulation • TC Drain Wire • Beldfoil + 65% TC Braid Shielding • Orange or Intrinsically Safe Blue PVC Jacket							
1334A	18	300	1	.28	7.11	-50 to +105	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 Sunlight Res Oil Res IEC 60332-3-24 (Cat C)

Conductor Color Code: Blue, Orange, Numbered Pairs.

TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Paired Cable

FOUNDATION Fieldbus

FOUNDATION Fieldbus Type A



Part No.	AWG	Voltage	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings		
				Inch	mm				
Stranded (7 x 26) TC Conductors • Cross-Linked Polyolefin Insulation • TC Drain Wire • Individually Shielded Pairs and Overall Beldfoil® Shielding • Orange or Intrinsically Safe Blue PVC Jacket									
2100A			1	.319	8.10				
2101A			2	.512	13.00				
2102A			5	.677	17.20				
2103A			8	.800	20.32				
2104A	18	300	12	1.015	25.78	-55 to +90	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 C(UL) CIC Type TC Sunlight Res Oil Res IEC 60332-3-24 (Cat C)		
2104A			16	1.126	28.60				
2106A			20	1.249	31.72				
2107A			24	1.389	35.28				
2108A			50	1.947	49.45				
Stranded (7 x 26) TC Conductors • Cross-Linked Polyolefin Insulation • TC Drain Wires • Individually Shielded Pairs and Overall Beldfoil Shielding • Orange or Intrinsically Safe Blue PVC Jacket									
2118A			1	.319	8.10				
2119A			2	.512	13.00				
2120A			5	.677	17.20				
2121A			8	.800	20.32				
2122A	18	600	12	1.015	25.78	-55 to +90	TC-ER CMG CMX-Outdoor CEC: CMG FT4 C(UL) CIC Type TC Sunlight Res Oil Res IEC 60332-3-24 (Cat C)		
2123A			16	1.126	28.60				
2124A			20	1.249	31.72				
2125A			24	1.389	35.28				
2126A			50	1.947	49.45				
Stranded (7 x 24) TC Conductors • Polyolefin Insulation • TC Drain Wires • Individually Shielded Pairs and Overall Beldfoil Shielding • Orange PVC Jacket									
1360A			1	.40	10.16	-50 to +105			
1361A			2	.58	14.73				
1362A			5	.75	19.05				
1363A	16	300	8	.91	23.11	-40 to +105	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 Sunlight Res Oil Res IEC 60332-3-24 (Cat C)		
1364A			12	1.11	28.19				
1365A			16	1.23	31.24				
1366A			20	1.39	35.31				
1367A			24	1.55	39.37				
Stranded (7 x 24) TC Conductors • Cross-Linked Polyolefin Insulation • TC Drain Wire • Individually Shielded Pairs and Overall Beldfoil Shielding • Orange or Intrinsically Safe Blue PVC Jacket									
2109A			1	.365	9.27				
2110A			2	.629	15.98				
2111A			5	.789	20.04				
2112A			8	.982	24.94				
2113A	16	300	12	1.186	30.12	-55 to +90	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 C(UL) CIC Type TC Sunlight Res Oil Res IEC 60332-3-24 (Cat C)		
2114A			16	1.321	33.55				
2115A			20	1.469	37.31				
2116A			24	1.638	41.61				
2117A			36	1.952	49.58				

Conductor Color Code: Blue, Orange, Numbered Pairs.

TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Paired Cable

FOUNDATION Fieldbus


FOUNDATION Fieldbus Type A



Part No.	AWG	Voltage	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
				Inch	mm		
Stranded (7 x 24) TC Conductors • Cross-Linked Polyolefin Insulation • TC Drain Wire • Individually Shielded Pairs and Overall Beldfoil Shielding • Orange or Intrinsically Safe Blue PVC Jacket							
2127A			1	.365	9.27		
2128A			2	.629	15.98		
2129A			5	.789	20.04		
2130A			8	.982	24.94		
2131A	16	600	12	1.186	30.12	-55 to +90	TC-ER CMG CMX-Outdoor CEC: CMG FT4 C(UL) CIC Type TC Sunlight Res Oil Res IEC 60332-3-24 (Cat C)
2132A			16	1.321	33.55		
2133A			20	1.469	37.31		
2134A			24	1.638	41.61		
2135A			36	1.952	49.58		
Stranded (7 x 24) TC Conductors • Polyolefin Insulation • TC Drain Wire • Overall Beldfoil® + 65% TC Braid Shielding • Orange or Intrinsically Safe Blue PVC Jacket							
1335A*	16	300	1	.34	8.64	-50 to +105	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 Sunlight Res Oil Res IEC 60332-3-24 (Cat C)
Stranded (7 x 22) TC Conductors • Polyolefin Insulation • TC Drain Wire • Overall Beldfoil + 65% TC Braid Shielding • Orange or Intrinsically Safe Blue PVC Jacket							
1336A*	14	300	1	.43	10.92	-50 to +105	PLTC/ITC-ER CMG CMX-Outdoor CEC: CMG FT4 Sunlight Res Oil Res IEC 60332-3-24 (Cat C)

*Although Type A specification references nominal 18 AWG, Belden 1335A and 1336A meet all other Type A requirements.
Conductor Color Code: Blue, Orange, Numbered Pairs.

FOUNDATION Fieldbus Type B and High Speed



Part No.	AWG	Voltage	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
				Inch	mm		
Stranded (7 x 30) TC Conductors • Polyolefin Insulation • TC Drain Wire • Beldfoil Shielding • Orange PVC Jacket							
3077F	22	300	1	.196	4.97	-30 to +105	FOUNDATION Fieldbus Type B NEC: PLTC/ITC CM • CEC: CM FT1 Sunlight Res Oil Res
Stranded (7 x 30) TC Conductors • Foam High-Density Polyethylene Insulation • TC Drain Wire • Beldfoil Shield • Orange PVC Jacket							
3078F	22	300	1	.351	8.92	-40 to +75	FOUNDATION Fieldbus High Speed NEC: CM • CEC: CM Sunlight Res Oil Res

Conductor Color Code: Blue, Orange, Numbered Pairs.

TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Data
PROFIBUS Cables

PROFIBUS DP



Part No.	AWG	Voltage	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
				Inch	mm		
Solid BC Conductors • High-Density Polyethylene Insulation (Red, Green) • Beldfoil® + 65% TC Braid Shielding • Chrome or Purple PVC Jacket							
3079A	22	300	1	.315	8.92	-30 to +75	NEC: CMG • CEC: CMG FT4 UL PLTC Sunlight Res Siemens Sinec L2 cable UL AWM 20201 (600V, 75°C)
Solid BC Conductors • Foam Polyethylene Insulation (Red, Green) • Beldfoil + 65% TC Braid Shielding • Purple PVC Jacket							
3079E	22	300	1	.315	8.92	-30 to +75	NEC: CMG • CEC: CMG FT4 UL PLTC Sunlight Res UL AWM 20201 (600V, 75°C)
Solid BC Conductors • Foam Polyethylene Insulation (Red, Green) • Beldfoil + 65% TC Braid Shielding • PVC Inner Jacket • Armor • Purple PVC Outer Jacket							
183079A	22	300	1	.587	14.91	-30 to +60	NEC: CMG • CEC: CMG FT4 UL PLTC Continuously Corrugated Aluminum Armor 600V AWM Sunlight Res

PROFIBUS PA



Part No.	AWG	Voltage	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
				Inch	mm		
Stranded (7 x 26) TC Conductors • Polyolefin Insulation • TC Drain Wire • Beldfoil Shielding • Intrinsically Safe Blue PVC Jacket							
3076F	18	300	1	.253	6.43	-40 to +105	NEC: CM • CEC: CM Sunlight Res Oil Res

Conductor Color Code: Blue, Orange, Numbered Pairs.

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride

Industrial Data Solutions® – Industrial Data

RS-485 PLTC/CM



Part No.	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm		
22 AWG (7 x 30) Stranded TC Conductors • Datalene® Insulation • TC Drain Wire • Overall Beldfoil® + 90% TC Braid Shielding • Black PVC Jacket					
3105A	1.0	.284	7.21	-20 to +60	NEC CM • CEC CM FT1 UL PLTC Sunlight Res Oil Res II 300V
3106A	1.5	.300	7.62		
3107A	2.0	.356	9.04		
3108A	3.0	.420	10.67		
3109A	4.0	.420	10.67		
22 AWG (7 x 30) Stranded TC Conductors • Datalene Insulation • TC Drain Wire • Overall Beldfoil + 90% TC Braid Shielding • Armor • Black PVC Jacket					
123107A	2.0	.650	16.51	-40 to +60	Aluminum Interlocked Armor NEC CM • CEC CMG FT4 UL PLTC Sunlight Res Oil Res II 300V

TC = Tinned Copper • PVC = Polyvinyl Chloride



Industrial Data Solutions® – Industrial Data

DeviceBus® for ODVA DeviceNet™

DeviceNet Communications Rate Table

Communications Rate (kb/s)	Maximum Distance							
	3082A, 3082F, 3083A, 7897A		3082K, 7896A		7895A		3084F, 3084A, 3085A, 7900A	
	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
125	1640	500	1378	420	984	300	328	100
250	820	250	656	200	820	250	328	100
500	328	100	246	75	328	100	328	100

DeviceBus Cables



Part No.	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		mm	Inch		
15 (19 x 28) and 18 (19 x 30) AWG Stranded TC Conductors • FEP (Data), PVC/Nylon (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Gray PVC Jacket					
7897A	2		.460	11.7	-20 to +75 ODVA Class 1 Thick, High Velocity, 600V UL TC-ER Sunlight Res Oil Res
16 (19 x 29) and 18 (19 x 30) AWG Stranded TC Conductors • FR Polypropylene (Data), PVC/Nylon (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Gray PVC Jacket					
7896A	2		.315	8.92	-20 to +75 ODVA Class 1 Cable V, 600V UL TC-ER Sunlight Res Oil Res
16 (19 x 29) and 18 (19 x 30) AWG Stranded TC Conductors • FR Polypropylene (Data), PVC/Nylon (Power) Insulation • Unshielded • Gray PVC Jacket					
7900A	2		.430	10.92	-20 to +75 ODVA Class 1 Cable IV, Drop Cable, 600V UL TC-ER CEC: FT1 Sunlight Res Oil Res
15 (19 x 28) and 18 (19 x 30) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Gray or Red PVC Jacket					
3082A	2		.480	12.19	-20 to +75 ODVA Class 2 Thick, 300V NEC: CMG • CEC: CMG FT4 C(UL) AWM I/II A UL AWM 20201 (600V) UL PLTC-ER Sunlight Res Oil Res
15 (65 x 33) and 18 (65 x 36) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Gray or Red PVC Jacket					
3082F	2		.480	12.19	-20 to +75 ODVA Class 2 Thick, 300V High Flex NEC: CMG • CEC: CMG FT4 C(UL) AWM I/II A UL AWM 20201 (600V) UL PLTC-ER Sunlight Res Oil Res

Conductor Color Coding: Data: Blue, White
Power: Red, Black

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Data *(continued)*

DeviceBus® for ODVA DeviceNet™

DeviceBus Cables



Part No.	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
	mm	Inch	mm		
15 (65 x 33) and 18 (65 x 36) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Gray TPE Jacket					
1345F	2	.480	12.19	-30 to +75	ODVA Class 2 Thick, 300V High Flex NEC: CMG • CEC: CMG FT4 C(UL) AWM I/II A UL AWM 20201 (600V) Sunlight Res Weldsplatter Resistant Oil Res I UL PLTC-ER Sunlight Res Oil Res
15 (19 x 28) and 18 (19 x 30) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Yellow CPE Jacket					
3083A	2	.475	12.07	-30 to +75	ODVA Class 2 Thick, 300V NEC: CMG • CEC: CMG FT4 UL PLTC Sunlight Res Oil Res
22 (19 x 34) and 24 (19 x 36) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • PVC (Power), FPE (Data) Insulation • Gray PVC Jacket					
3084A	2	.280	7.11	-20 to +75	ODVA Class 2 Thin, 300V NEC: CMG CL2 • CEC: CMG FT4, C(UL) AWM I/II A Sunlight Res Oil Res
22 (155 x 44) and 24 (105 x 44) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • PVC (Power), FPE (Data) Insulation • Gray PVC Jacket					
3084F	2	.275	6.00	-20 to +75	Class 2 Thin, 300V High Flex NEC: CMG CL2 • CEC: CMG FT4, C(UL) AWM I/II A Sunlight Res Oil Res
22 (19 x 34) and 24 (19 x 36) AWG Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Yellow CPE Jacket					
3085A	2	.280	7.11	-30 to +75	ODVA Class 2 Thin, 300V NEC: CL2 CMG • CEC: CMG FT4 Sunlight Res Oil Res
20 (19 x 32) and 18 AWG (19 x 30) Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • Individually Foil Shielded Pairs + Overall 65% TC Braid Shielding • Gray PVC Jacket					
7895A	2	.378	9.60	-20 to +75	ODVA Class 2 Cable III, 300V NEC: CMG • CEC: CMG FT4 UL AWM 20201 (600V) UL PLTC Sunlight Res Oil Res

Conductor Color Coding: Data: Blue, White
Power: Red, Black

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • FPE = Foam Polyethylene • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Data

DeviceBus® for Honeywell Smart Distributed System



Part No.	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm		
22 AWG (19 x 34) Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • TC Drain Wire • Individually Beldfoil® Shielded Pairs • Gray PVC Jacket					
3087A	2	.290	7.37	-40 to +80	Micro Cable, Drop NEC: CL2 UL AWM 2464 (30V, 60°C) CSA AWM I/II A FT1
16 AWG (19 x 29) and 20 AWG (19 x 32) Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • TC Drain Wire • Individually Beldfoil Shielded Pairs • Gray PVC Jacket					
3086A	2	.398	10.11	-40 to +80	Mini Cable, Trunk NEC: CL2 UL AWM 2464 (30V, 60°C) CSA AWM I/II A FT1
22 AWG (154 x 44) and 24 AWG (105 x 44) Stranded TC Conductors • Foam Polyethylene (Data), PVC (Power) Insulation • TC Drain Wire • Individual Beldfoil + 65% TC Braid Shielding • Gray TPE Jacket					
1346F	2	.275	6.99	-30 to +75	Class 2 Thin, 300V NEC: CMG CL2• CEC: CMG FT4 Sunlight Res Oil Res I Weldsplatter Resistant C(UL) AWM I/II A
20 AWG (7 x 28) Stranded BC Conductors • Foam High-Density Polyethylene Insulation • TC Drain Wire • Overall Beldfoil + 78% TC Braid Shielding • Red PVC Jacket					
1348A	3 Cond.	.303	7.70	-30 to +60	3 Conductor, 300V NEC: CM • CEC: CM
3 20 AWG (7 x 28) and 2 18 AWG (7 x 26) Stranded BC Conductors • Foam High-Density Polyethylene Insulation • TC Drain Wire • PVC Inner Jacket • Beldfoil + 78% TC Braid Shielding • Red PVC Outer Jacket					
1349A*	5 Cond.	.512	13.00	30 to +60	5 Conductor, 300V NEC: CM • CEC: CM

*3 Conductors Are Shielded, 2 Are Unshielded.

Conductor Color Code: Power Pairs: Red, Black
Data Pairs: Blue, White
Conductors: Blue, Yellow, White

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Data

DeviceBus® for Square D/Seriplex® and Phoenix Contact INTERBUS®-S


Square D/Seriplex



Part No.	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm		
18 AWG (16 x 30) and 22 (7 x 30) Stranded TC Conductors • Foam High-Density Polyethylene (Data), PVC (Power) Insulation • TC Drain Wire • Overall Beldfoil® Shielding • Orange PVC Jacket					
3124A	2	.308	7.82	-20 to +75	Seriplex CBL 1822-P18 NEC: CL2 CM • CEC: CM UL AWM 20201 (600V, 75°C)
18 AWG (16 x 30) and 22 (7 x 30) Stranded TC Conductors • Foam High-Density Polyethylene Insulation • TC Drain Wire • Overall Beldfoil Shielding • Orange PVC Jacket					
3125A	2	.368	10.11	-20 to +75	Seriplex CBL 1622-P1 NEC: CL2 CM • CEC: CM 300V, 75°C
12 AWG (65 x 30), 16 AWG (26 x 30) and 22 (7 x 30) Stranded TC Conductors • Foam High-Density Polyethylene Insulation • TC Drain Wire • Overall Beldfoil Shielding • Orange PVC Jacket					
3126A	3	.486 x .363	12.34 x 9.22	-20 to +75	Seriplex CBL 162212-P16 NEC: CL2 CM • CEC: CM 300V, 75°C

Conductor Color Coding: 16/18 AWG: Red, Black
 22 AWG: White, Green
 12 AWG: Black/White, Red/White

Phoenix Contact INTERBUS-S



Part No.	Conductors	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm		
18 AWG (7 x 26) and 24 (7 x 33) Stranded TC Conductors • Polyethylene (Data), PVC (Power) Insulation • TC Drain Wire • Overall Beldfoil + 90% TC Braid Shielding • Green Polyurethane Jacket					
3119A	3 Cond. Pwr 3 Pr. Data	.333	8.46	-40 to +80	UL AWM 20333 (300V, 80°C)
Stranded 24 AWG (7 x 32) TC Conductors • PE Insulation • Overall Beldfoil + 90% TC Braid Shielding • Green Polyurethane Jacket					
3120A	3 Pr.	.277	7.04	-40 to +80	UL AWM 20333 (300V, 80°C)

TC = Tinned Copper • PE = Polyethylene • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Industrial Data Solutions® – Industrial Coaxial

ControlNet™ Quad Shielded Coaxial

RG6/U Type Quad Shielded Coaxial

Part No.	Core Dia.		OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
	Inch	mm	Inch	mm		
18 AWG Solid BC-Covered Steel Conductor • Foam Polyethylene Insulation • Duobond® IV* Quad Shield • PVC Jacket (Black or Intrinsicly Safe Blue)						
3092A	.180	4.57	.298	7.57	-30 to +75	Impedance: 75 Ω NEC: CMR CL2R • CEC: CMG FT4
18 AWG Solid BC-Covered Steel Conductor • Foam FEP Insulation • Duobond IV* Quad Shield • Fluorocopolymer Jacket (Black or Intrinsicly Safe Blue)						
3093A	.170	4.32	.274	6.96	-20 to +150	Plenum Rated Impedance: 75 Ω NEC: CMP • CEC: CMP FT6
20 AWG Stranded (105 x 40) BC Conductor • Duobond IV* Quad Shield • Foam Polyethylene Insulation • Black PVC Jacket						
3092F	.183	4.65	.303	7.70	-40 to +75	High Flex Impedance: 75 Ω NEC: CMR CL2R • CEC: CMG FT4
18 AWG Solid BC-Covered Steel Conductor • Foam Polyethylene Insulation • PVC Inner Jacket • Duobond IV* Quad Shield • Armor • Black PVC Sunlight-Resistant Outer Jacket						
123092A	.180	4.57	.620	15.75	-40 to +75	Aluminum Interlocked Armor Impedance: 75 Ω NEC: CM • CEC: CMG FT4, HL
18 AWG Solid BC-Covered Steel Conductor • Duobond IV* Quad Shield • Armor • Foam Polyethylene Insulation • PVC Inner Jacket • Black PVC Outer Jacket						
183092A	.180	4.57	.570	14.48	-30 to +75	Continuously Corrugated Aluminum Armor Impedance: 75 Ω NEC: CM CL2

*Duobond IV is a four-layer shield: (1) Duobond II Foil, (2) TC Braid (94%), (3) Duofoil® Foil, (4) TC Braid (90%).

BC = Bare Copper • PVC = Polyvinyl Chloride

Industrial Data Solutions® – Industrial Coaxial

ControlBus™ Quad Shielded Coaxial

Quad Shielded Coaxial



Part No.	Core Dia.		OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
	Inch	mm	Inch	mm		
20 AWG Stranded (105 x 40) BC Conductor • Foam Polyethylene Insulation • Duobond® IV Quad Shielding • Black PVC Jacket						
3092F	.183	4.65	.303	7.70	-40 to +75	High Flex Impedance: 75 Ω RG-6/U Type NEC: CMR CL2R • CEC: CMG FT4 IEEE 802.4 MAP/IEEE 802.7 Mini-MAP
18 AWG Solid BC-Covered Steel Conductor • Gas-Injected Foam Polyethylene Insulation • Duobond IV Quad Shielding • Gray PVC Jacket						
3131A	.189	4.57	.300	7.62	-30 to +75	Impedance: 75 Ω RG-6/U Type NEC: CMR CL2R • CEC: CMG FT4
18 AWG Solid BC-Covered Steel Conductor • Foam FEP Insulation • Duobond IV Quad Shielding • Gray Fluorocopolymer Jacket						
3132A	.170	4.32	.274	6.96	-20 to +150	Plenum Impedance: 75 Ω Outdoor and Direct Burial RG-6/U Type NEC: CMP • CEC: CMP FT6 IEEE 802.4 MAP/IEEE 802.7 Mini-MAP
14 AWG Solid BC-Covered Steel Conductor • Gas-Injected Foam Polyethylene Insulation • Duobond IV Quad Shielding • Gray PVC Jacket						
3094A	.280	7.11	.407	10.34	-30 to +80	Impedance: 75 Ω RG-11/U Type NEC: CMR CLR2 • CEC: CMG FT4 IEEE 802.4 MAP
14 AWG Solid BC-Covered Steel Conductor • Foam FEP Insulation • Duobond IV Quad Shielding • Gray Fluorocopolymer Jacket						
3095A	.280	7.11	.387	9.83	-20 to +150	Plenum Impedance: 75 Ω Outdoor and Direct Burial RG-11/U Type NEC: CMP • CEC: CMG FT6 IEEE 802.4 MAP

*Duobond IV is a four-layer shield: (1) Duobond II Foil, (2) 94% TC Braid, (3) Duofoil® Foil, (4) 90% TC Braid.

BC = Bare Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Industrial Data Solutions® – Industrial Twinax

Blue Hose® Cables

Blue Hose Industrial Twinax



Part No.	Voltage	Nominal OD		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm		
20 AWG Stranded (7 x 28) TC Conductors • Polyethylene Insulation • Overall Beldfoil® + 55% TC Braid Shielding • Blue Sunlight-Resistant PVC Jacket					
9463	300V	.238	6.05	-40 to +80	NEC: CM CL2 • CEC: CM UL AWM 2464 MSHA Approved*
20 AWG Stranded (42 x 36) TC Conductors • Polyethylene Insulation • Overall Beldfoil + 85% TC Braid Shielding • Blue Sunlight-Resistant PVC Jacket					
9463F	300V	.154	3.91	-40 to +80	High Flex NEC: CM CL2 • CEC: CM UL AWM 2464 MSHA Approved*
20 AWG Stranded (7 x 28) TC Conductors • Polyethylene Insulation • Overall Beldfoil + 55% TC Braid Shielding • Blue Sunlight-Resistant LDPE Jacket					
129463	300V	.563	14.30	-40 to +60	Aluminum Armored NEC: CM CL2 • CEC: CM, HLBCD
139463		.563	14.30	-40 to +60	Steel Armored NEC: CM CL2 • CEC: CM, HLBCD
189463		.500	12.70	-20 to +60	Corrugated Armored UL PLTC
20 AWG Stranded (7 x 28) TC Conductors • Low-Density Polyethylene Insulation • Overall Beldfoil + 55% TC Braid Shielding • Polyethylene Jacket					
9463DB	300V	.154	3.91	-55 to +80	Continuously Flooded Direct Burial
Stranded (7 x 28) TC Conductors • FEP Insulation • Overall Beldfoil + 55% TC Braid Shielding • Blue Sunlight-Resistant FEP Jacket					
89463	300V	.151	3.83	-70 to +200	Plenum NEC: CMP CL2P • CEC: CMP FT6

Conductor Color Codes: Blue, Clear.

*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • LDPE = Low-Density Polyethylene • PVC = Polyvinyl Chloride



Industrial Data Solutions® – Industrial Twinax

Twinaxial Cables

Twinax Cables



Part No.	Core Dia.		OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
	Inch	mm	Inch	mm		
20 AWG Stranded (7 x 28) TC Conductors • Polyethylene Insulation (Blue, Clear) • 93% TC Braid Shielding • Blue PVC Jacket						
9272	.156	3.96	.244	6.20	-20 to +60	Impedance: 78 Ω NEC: CM • CEC: CM UL AWM Style 2092 (300V, 60°C)
18 AWG Stranded (7 x 26) BC Conductors • Polyethylene Insulation (Clear, Clear) • Polyethylene Inner Jacket • 95% TC Double Braid Shielding • Black Non-contaminating PVC Outer Jacket						
9250	.285	7.24	.416	10.57	-40 to +80	Impedance: 95 Ω RG-22B/U Type VW-1 One Conductor Has Tinned Center Strand
20 AWG Stranded (7 x 28) One TC, One BC Conductor • Polyethylene Insulation (Natural, Natural) • Polyethylene Inner Jacket • Duofoil® + TC Braid (86%) Shielding • Black PVC Outer Jacket						
9207	.236	5.99	.330	8.38	-30 to +75	Impedance: 100 Ω NEC: CMG CL2 • CEC: CMG FT4
25 AWG Stranded (7 x 33) TC Conductors • Polyethylene Insulation (Blue, Clear) • Beldfoil® • Blue PVC Jacket						
9271	.170	4.32	.240	6.10	-20 to +60	Impedance: 124 Ω NEC: CM • CEC: CM UL AWM 2092 (300V, 60°C)
16 AWG Solid BC Conductors • Foam Polyethylene Insulation (Blue, Clear) • Duofoil + 90% TC Braid Shielding • Black PVC Jacket						
9860	.322	8.18	.440	11.18	-20 to +60	Impedance: 124 Ω NEC: CMX • CEC: CMX UL AWM 2448 (30V, 60°C) VW-1
22 AWG stranded (19 x 34) TC Conductors • Datalene® Insulation (Black, Yellow) • Duofoil Shielding • Black PVC Jacket • Stranded TC Drain Wire						
9182	.275	6.98	.345	8.76	-20 to +60	Impedance: 150 Ω NECL CL2X CMX • CEC: CMX UL AWM 2668 (30V, 60°C) VW-1
22 AWG stranded (19 x 34) TC Conductors • Foam FEP Insulation (Black, Yellow) • Duofoil Shielding • Black FEP Jacket • Stranded TC Drain Wire						
89182	.278	7.06	.307	7.80	-70 to +200	Impedance: 150 Ω Plenum Rated NEC: CMP CL2P • CEC: CMP FT6

BC = Bare Copper • TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride



Industrial Data Solutions® – Industrial Twinax

DataTray® 600V Twinaxial Cables

DataTray® 600V Twinax



Part No.	Core Dia.		OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
	Inch	mm	Inch	mm		
18 AWG Stranded (7 x 26) TC Conductors • Flame-retardant Polyolefin Insulation (Natural, Blue) • Overall Beldfoil® + 55%TC Braid Shield • Blue Sunlight-resistant PVC Jacket • TC Drain Wire						
3072F	.192	4.88	.324	8.23	-40 to +75	Impedance: 78 Ω NEC: CMG, ITC, TC, PLTC • CEC: CMG FT4 UL TC MSHA Approved*
3073F	.246	6.25	.388	9.86	-40 to +75	Impedance: 100 Ω NEC: CMG, ITC, TC, PLTC • CEC: CMG FT4 UL TC
3074F	.328	8.33	.460	11.86	-40 to +75	Impedance: 124 Ω NEC: CMG, ITC, TC, PLTC • CEC: CMG FT4 UL TC

*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification

TC = Tinned Copper • PVC = Polyvinyl Chloride

Industrial Data Solutions®

Coaxial Ethernet Cable

Thinnet 10Base2 Ethernet



Part No.	AWG	Core Dia.		OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		


Stranded (19 x 32) TC Conductor • Foam Polyethylene Insulation • Duobond® II Foil + 93% TC Braid Shielding • Gray PVC Jacket

9907	20	.102	2.59	.185	4.70	-40 to +80	Impedance: 50 Ω RG-58 Type NEC: CM CL2 • CEC: CM UL AWM Style 1354 (30V, 60°C)
------	----	------	------	------	------	------------	-----------------------------------------------------------------------------------------

Stranded (19 x 32) TC Conductor • Foam FEP Insulation • Duobond II Foil + 93% TC Braid Shielding • Gray Fluorocopolymer Jacket

89907	20	.095	2.41	.160	4.06	-20 to +150	RG-58A/U Type Plenum Rated Impedance: 50 Ω NEC: CMP CL2P • CEC: CMP FT6 Outdoor and Direct Burial
-------	----	------	------	------	------	-------------	---------------------------------------------------------------------------------------------------------------

Thicknet 10Base5 Ethernet



Part No.	AWG	Core Dia.		OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm	Inch	mm		

Solid BC Conductor • Foam Polyethylene Insulation • Duobond IV Quad Shielding • Yellow PVC Jacket

9880	12	.243	6.17	.405	10.29	-40 to +60	Impedance: 50 Ω NEC: CM CL2 • CEC: CM UL AWM Style 1478 (30V, 60°C)
------	----	------	------	------	-------	------------	---------------------------------------------------------------------------

Solid BC Conductor • Foam FEP Insulation • Duobond IV Quad Shielding • Orange Fluorocopolymer Jacket

89880	12	.245	6.22	.375	9.53	-25 to +150	Plenum Rated Impedance: 50 Ω NEC: CMP CL2P • CEC: CMP FT6 Outdoor and Direct Burial
-------	----	------	------	------	------	-------------	----------------------------------------------------------------------------------------------

*Duobond IV is a four-layer shield: (1) Duobond II Foil, (2) TC Braid (94%), (3) Duofoil® Foil, (4) TC Braid (90%).

BC = Bare Copper • TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Industrial Data Solutions® – Interconnect Cable

Shielded Twisted-Pair Cables

Interconnect Paired Cable



Part No.	Pairs	OD (Nom)		Operating Temperature (°C)	Additional Features/Ratings
		Inch	mm		
24 AWG (7 x 32) Stranded TC Conductors • Datalene® Insulation • TC Drain Wire • Individually Beldfoil® Shielded Pairs • Chrome PVC Jacket					
9729	2	.266	6.76	-20 to +80	NEC: CM • CEC: CM UL AWM 2493 (300V, 60°C)
22 AWG (7 x 30) Stranded TC Conductors • Polyolefin Insulation • TC Drain Wire • Individually Beldfoil Shielded Pairs • Chrome PVC Jacket					
8777	3	.273	6.93	-20 to +80	NEC: CM • CEC: CM UL AWM 2919 (30V, 80°C)
22 AWG (7 x 30) Stranded TC Conductors • Polyolefin Insulation • TC Drain Wire • Individually Beldfoil Shielded Pairs • Chrome PVC Jacket					
8723	2	.168	4.27	-20 to +75	NEC: CM • CEC: CM • 300V, 60°C Pairs Cabled On Common Axis to Reduce Diameter
22 AWG (7 x 30) Stranded TC Conductors • Red FEP Insulation • TC Drain Wire • Individually Beldfoil Shielded • Red FEP and Jacket					
88723	2	.148	3.76	-70 to +200	Plenum • Nonconduit NEC: CMP • CEC CMP FT6 300V Pairs Cabled On Common Axis to Reduce Diameter
18 AWG (16 x 30) Stranded TC conductors • Polyolefin Insulation • TC Drain Wire • Overall Beldfoil Shielding • Chrome PVC Jacket					
8760	1	.222	5.64	-20 to +60	NEC: CM • CEC: CM UL AWM 2092 (300V, 60°C)

Conductor Color Coding: 9279: Red/Black, White/Black
 8777: Red/Black, White/Black, Green/Black
 8723, 88723: Red/Black, Green/White
 8760: Black/Clear

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Be Certain with Belden

Belden VFD Cables Are Designed to Deliver Top Performance in Any Type of Environment

Belden VFD Cable Advantages

All Cables

- Thicker, industrial-grade XLP insulations provide low capacitance for extended motor life, reduced likelihood of corona discharge, reduced magnitude of standing waves, increased efficiency of power transfer
- Robust ground and shielding system to minimize radiated and conducted noise that can disrupt plant control and instrumentation systems
- Reliably carry power from AC drive systems to AC motors
- Effectively handle the overall high power levels of pulse-width modulated (PWM) signals
- Reliably handle high voltage spikes—eliminating potential damage to the cable, motors, bearings, drives and related equipment—potentially extending their life
- Industrial-grade PVC jackets provide sunlight and oil-resistance; Haloarrest® jackets are halogen-free and provide sunlight-resistance in LSZH versions
- HaloarrestXLink™ jackets are thermoset and low smoke zero halogen for exposure in harsh environments
- Resistant to adverse or harsh environments
- ER rating allows for the elimination of conduit for easier and less expensive installations
- Effectively eliminate downtime due to cable failure

Classic Foil/Braid Designs

- High-strand conductors ease installation; enable better vibration resistance
- Full-sized insulated ground allows lower resistance path to ground
- Tinned copper conductors to prevent against corrosion
- Low capacitance and low impedance of the cables closely matches the drive and electrical values
- Round configuration for reliable sealing

Classic Symmetrical Designs

- Available with high-strand conductors in large AWG sizes
- Design features a copper tape shield with segmented ground
- Smaller OD than the Classic Designs with Foil/Braid

Classic Designs with Signal Pair

- Overall jackets provide more protection for the integrated signal pair
- Easier, lower cost installation than pulling the signal pair separately

Termination Guide


See our Unarmored VFD Cable Termination Guide (Lit No. VFDCDG) for a step-by-step look at best practices for installing and terminating unarmored VFD cables, available on-line at www.belden.com.

Applicable for Use With:

- Rockwell Automation AC drives
- ABB/Baldor
- Danfoss
- Eaton/Cutler-Hammer
- Emerson
- General Electric
- Hitachi
- Magnetek
- Mitsubishi Electric Automation
- OMRON
- Robicon
- Schneider
- Siemens
- Toshiba
- Vacon (TB Wood's)
- WEG
- Yaskawa

Belden VFD Cables versus Tray Cables or Single Conductor Products

- Superior radiated and conducted noise protection with robust shield and ground design
- XLP insulation provides lower capacitance resulting in reduced voltage spikes and corona discharge
- Extended motor life
- Longer cable runs

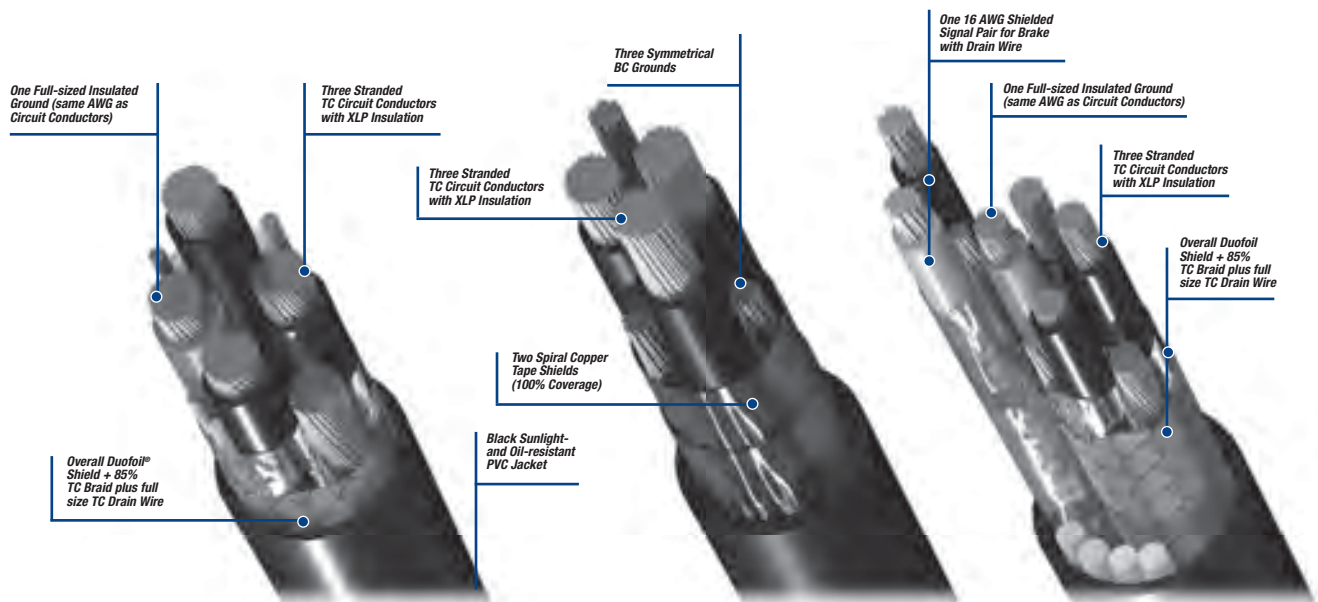

VFD Cross Reference Guide

Voltage	HP	kW	Sizes	Classic VFD Part No.	Classic with Signal Pair Part No.	2 kV VFD Part No.	CSA VFD Part No.	LSZH VFD Part No.	Thermostat LSZH VFD, Marine Approvals Part No.
230V 3Ø	.25 to 3	0.75 to 2.2	16	29500	29510	—	—	29500T	29500X
			14	29501	29511	29536	29550C	29501T	29501X
	5	3.7	12	29502	29512	29537	29551C	29502T	29502X
			12	29502	29512	29537	29551C	29502T	29502X
	7.5	5.6	12	29502	29512	29537	29551C	29502T	29502X
	10	7.5	10	29503	29513	29538	29552C	29503T	29503X
	15	11.2	8	29504	—	29539	29553C	29504T	29504X
	20	14.9	6	29505	—	29540	29554C	29505T	29505X
	25	18.6	4	29506	—	29541	29555C	29506T	29506X
	40	29.8	2	29507	—	29542	29556C	29507T	29507X
			1	29528	—	29543	29557C	29528T	29528X
	50	37.3	1/0	29529	—	29544	29558C	29529T	29529X
	60	44.7	2/0	29530	—	29545	29559C	29530T	29530X
			3/0	29531	—	29546	29560C	29531T	29531X
	75	55.9	4/0	29532	—	29547	29561C	29532T	29532X
250 MCM			—	—	29533	29533	—	—	
100	74.6	350 MCM	—	—	29534	29534	—	—	
125	93.2	500 MCM	—	—	29535	29535	—	—	
460V 3Ø	10	7.5	16	29500	29510	—	—	29500T	29500X
			14	29501	29511	29536	29550C	29501T	29501X
			12	29502	29512	29537	29551C	29502T	29502X
	15	11.2	12	29502	29512	29537	29551C	29502T	29502X
			10	29503	29513	29538	29552C	29503T	29503X
	20	14.9	10	29503	29513	29538	29552C	29503T	29503X
	30	22.4	8	29504	—	29539	29553C	29504T	29504X
	40	29.8	6	29505	—	29540	29554C	29505T	29505X
	50	37.3	4	29506	—	29541	29555C	29506T	29506X
	75	55.9	2	29507	—	29542	29556C	29507T	29507X
			1	29528	—	29543	29557C	29528T	29528X
	100	74.6	1/0	29529	—	29544	29558C	29529T	29529X
	125	93.2	2/0	29530	—	29545	29559C	29530T	29530X
			3/0	29531	—	29546	29560C	29531T	29531X
	150	111.9	4/0	29532	—	29547	29561C	29532T	29532X
250 MCM			—	—	29533	29533	—	—	
200	149.1	350 MCM	—	—	29534	29534	—	—	
250	186.4	500 MCM	—	—	29535	29535	—	—	
575V 3Ø	10	7.5	16	29500	29510	—	—	29500T	29500X
			14	29501	29511	29536	29550C	29501T	29501X
	15	11.2	14	29501	29511	29536	29550C	29501T	29501X
			12	29502	29512	29537	29551C	29502T	29502X
	20	14.9	12	29502	29512	29537	29551C	29502T	29502X
			10	29503	29513	29538	29552C	29503T	29503X
	30	22.4	10	29503	29513	29538	29552C	29503T	29503X
	40	29.8	8	29504	—	29539	29553C	29504T	29504X
	50	37.3	6	29505	—	29540	29554C	29505T	29505X
	60	44.7	4	29506	—	29541	29555C	29506T	29506X
	100	74.6	2	29507	—	29542	29556C	29507T	29507X
			1	29528	—	29543	29557C	29528T	29528X

Values based on typical Full-Load Current (FLC) ratings of three-phase AC motors as published in NEC Table 430.250 (2011) multiplied by 125% per NEC article 430-22 (A) (2011). The ampacity ratings of the cables are based on NEC Table 310.15(B)(16) (2011). The VFD w/Signal ampacity values were de-rated to 80% per NEC Table 310.15 (B)(2)(a) (2011) due to the increased number of current-carrying conductors included in these cable(s).

Values based on typical Full-Load Current (FLC) ratings of three-phase AC motors as published in CEC Table 44 (2012) multiplied by 125% per CEC Section 28-112 (2012). The ampacity ratings of the cables are based on CEC Table 2 (2012). The VFD w/Signal ampacity values were de-rated to 80% per CEC Table 5C (2012) due to the increased number of current-carrying conductors included in these cable(s).

Consult drive/motor manufacturer for exact FLC ratings. Ampacity interpretations subject to user's local authority having jurisdiction.



VFD Cross Reference Guide *(continued)*

Voltage	HP	kW	Sizes	Classic VFD Part No.	Classic with Signal Pair Part No.	2 kV VFD Part No.	CSA VFD Part No.	LSZH VFD Part No.	Thermoset LSZH VFD, Marine Approvals Part No.
575V 3Ø	125	93.2	1/0	29529	—	29544	29558C	29529T	29529X
			2/0	29530	—	29545	29559C	29530T	29530X
	150	111.9	3/0	29531	—	29546	29560C	29531T	29531X
			4/0	29532	—	29547	29561C	29532T	29532X
	200	149.1	250 MCM	—	—	29533	29533	—	—
	250	186.4	350 MCM	—	—	29534	29534	—	—
350	261.0	500 MCM	—	—	29535	29535	—	—	

Values based on typical Full-Load Current (FLC) ratings of three-phase AC motors as published in NEC Table 430.250 (2011) multiplied by 125% per NEC article 430-22 (A) (2011). The ampacity ratings of the cables are based on NEC Table 310.15(B)(16) (2011). The VFD w/Signal ampacity values were de-rated to 80% per NEC Table 310.15 (B)(2)(a) (2011) due to the increased number of current-carrying conductors included in these cable(s).

Values based on typical Full-Load Current (FLC) ratings of three-phase AC motors as published in CEC Table 44 (2012) multiplied by 125% per CEC Section 28-112 (2012). The ampacity ratings of the cables are based on CEC Table 2 (2012). The VFD w/Signal ampacity values were de-rated to 80% per CEC Table 5C (2012) due to the increased number of current-carrying conductors included in these cable(s).

Consult drive/motor manufacturer for exact FLC ratings. Ampacity interpretations subject to user's local authority having jurisdiction.

VFD Supplier	VFD Name
ABB/Baldor	AC S
	ACH 501 (480V AC, 208/230V AC)
	ACH550
	ACS 6000c
	ACQ
	Cascade
	Cyclo (Analog)
	Cyclo (PSR)
	MEGADRIVE-LCI
	MEGASTAR A
	SAMI MEGASTAR (W)
	TYRAK-LCI
	VS1SP
	VS1GV
VS1PM	
Danfoss	AHF
	VLT® 12-Pulse
	VLT 2800
	VLT 2800
	VLT AQUA FC 200
	VLT FC 100
	VLT FC 300
	VLT High Power
	VLT Low Harmonic
	VLT Micro

VFD Supplier	VFD Name
Easton/Cutler-Hammer	CFX
	CPX
	H-Max
	HVX
	LCX
	M-Max
	MXV
	NFX
	SC 9000
	SLX
SPX	
SVX	
Mitsubishi	A500 Series
	A700 Series
	A701 Series
	D700 Series
	E500 Series
	E700 Series
	E700SC Series
	F700Series
S500 Series	
V500 Drives	
OMRON	3G3JX
	3G3MX2
	3G3RX

VFD Supplier	VFD Name
Rockwell/A-B	PowerFlex®
	1336
	1305
Schneider	Altivar®
	E-flex™
	M-Flex™
	PowerGard™
Siemens	MICROMASTER
	SINAMICS
	SED2
WEG	VBA
	CFW
	EDP
Yaskawa	MW
	A1000
	AC7
	E7
	F7
	G5HHP
	G7
	J1000
	P1000
	P7
V1000	
VS mini	
Z1000	


Encoder Cables

Belden also offers the following standard cables for encoder applications. Encoder cables help feed information to the microprocessor regarding both the speed and the position of the rotor.

Part No.	Pairs	AWG
8790	1 (Power Supply)	18
9729	2	24
9730, 89730	3	24
9728	4	24
9892	4	20
9860	1 (Signal)	16

VFD (Variable Frequency Drive) Cable

Classic Foil/Braid Design




- Four-Conductor Cable (3 Circuit + Ground)
- Full-Size Insulated Ground
- Foil + Braid Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL TC-ER
- 1000V CSA AWM I/II A/B FT4
- C(UL) 600V Type CIC TC

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded TC Conductors • XLP Insulation (PVC for Ground) • Overall Beldfoil® + 85% TC Braid Shielding • Black PVC Jacket • TC Drain Wire (Sized Same as Conductors)									
29500	16	26 x 30	.53	13.46	128	570	4.3	109.2	90°C Wet/Dry Sunlight Res Oil Res UL Direct Burial IEEE 1202/383 XHHW-2, RHW-2 Conductors (16 AWG: XHHW-2 only) MSHA* P-07-KA070003
29501	14	41 x 30	.60	15.24	212	943	4.8	121.9	
29502	12	65 x 30	.65	16.51	336	1495	5.2	132.0	
29503	10	105 x 30	.69	17.53	592	2634	5.5	139.7	
29504	8	7 x 19 x 29	.93	23.61	768	3418	7.5	190.5	
29505	6	7 x 19 x 27	1.02	25.91	1220	5429	8.2	203.2	
29506	4	7 x 19 x 25	1.16	29.46	1940	8633	9.3	236.2	
29507	2	7 x 19 x 23	1.31	33.27	3088	13,742	10.8	273.1	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

Classic Symmetrical Design




- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL 1277 Type TC-ER
- 1000V CSA AWM I/II A/B FT4
- C(UL) 600V Type RW90 TC

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded BC Conductors • XLP Insulation (PVC for Ground) • Dual Spiral Copper Tape Shield • Black PVC Jacket • BC Drain Wire (Sized Same as Conductors)									
29528	1	7 x 19 x 22	1.20	30.48	2650	11,788	12.0	304.8	90°C Wet/Dry Sunlight Res Oil Res UL Direct Burial IEEE 1202/383 XHHW-2 Conductors MSHA* P-07-KA070003
29529	1/0	7 x 19 x 21	1.29	32.77	3537	15,733	12.9	327.7	
29530	2/0	7 x 19 x 20	1.40	35.56	4200	18,682	14.0	355.6	
29531	3/0	7 x 19 x 19	1.52	38.61	5025	22,352	15.2	386.1	
29532	4/0	7 x 19 x 18	1.68	42.67	6670	29,670	16.8	426.7	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

Classic Foil/Braid Design • Signal Pair



- Four-Conductor Cable (3 Circuit + Ground)
- Full-Size Insulated Ground
- 16 AWG Stranded (26 x 30) Shielded Signal Pair
- Foil + Braid Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL TC-ER
- 1000V CSA AWM I/II A/B FT4
- C(UL) 600V Type CIC TC

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded TC Conductors • XLP Insulation (PVC for Ground) • Overall Duofoil® + 85% TC Braid Shielding • Black PVC Jacket • TC Drain Wire (Sized Same as Conductors)									
29510	16	26 x 30	.75	19.05	272	1210	7.5	190.5	IEEE 1202/383 90°C Wet/Dry Sunlight Res Oil Res UL Direct Burial XHHW-2, RHW-2 Conductors (16 AWG: XHHW-2 only) MSHA* P-07-KA070003
29511	14	41 x 30	.82	20.83	368	1638	8.2	208.3	
29512	12	65 x 30	.90	22.86	527	2345	9.0	228.6	
29513	10	105 x 30	.99	25.15	718	3195	9.9	251.5	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.


*Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration Certification

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



VFD (Variable Frequency Drive) Cable

Classic Foil/Braid Design • 2kV




- Four-Conductor Cable (3 Circuit + Ground)
- Full-Size Insulated Ground
- Foil + Braid Shield
- 2000V UL Flexible Motor Supply Cable
- 2000V UL TC-ER
- 1000V CSA AWM I/II A/B FT4
- C(UL) 600V Type CIC TC

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded TC Circuit Conductors • XLP Insulation (PVC for Ground) • Overall Duofoil + 85% TC Braid Shielding • Black PVC Jacket • TC Drain Wire (Sized Same as Conductors)									
29536	14	41 x 30	.68	17.30	212	943	6.8	172.72	
29537	12	65 x 30	.72	18.30	336	1495	7.3	185.42	
29538	10	105 x 30	.79	20.10	592	2634	7.9	200.70	
29539	8	7 x 19 x 29	.96	24.40	768	3418	9.6	243.84	
29540	6	7 x 19 x 27	1.07	26.92	1220	5429	10.6	269.24	
29541	4	7 x 19 x 25	1.21	30.50	1940	8633	12.1	307.34	
29542	2	7 x 19 x 23	1.36	34.54	3088	13,742	13.6	345.44	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

Classic Symmetrical Design • 2kV




- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 2000V UL Flexible Motor Supply Cable
- 2000V UL TC-ER
- 1000V CSA AWM I/II A/B FT4
- C(UL) 2000V Type RW90 TC

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded TC Conductors • XLP Insulation • Dual Spiral Copper Tape Shield • Black PVC Jacket • BC Ground Conductors									
29543	1	7 x 19 x 22	1.36	34.54	2650	11,788	13.6	345.44	
29544	1/0	7 x 19 x 21	1.45	36.83	3537	15,733	14.5	368.30	
29545	2/0	7 x 19 x 29	1.56	39.62	4200	18,682	15.6	396.24	
29546	3/0	7 x 19 x 19	1.75	44.50	5025	22,352	17.5	444.50	
29547	4/0	7 x 19 x 18	1.88	47.80	6670	29,670	18.8	477.52	

Conductor Color Coding: ICEA Method 4: Black and Numbered.

Symmetrical Design • 2kV MCM Size



- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 2000V UL TC-ER
- 1000V CSA 22.2 No. 230 TC

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	MCM	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded BC Conductors • XLP Insulation • Dual Spiral Copper Tape Shield • Black PVC Jacket • BC Ground Conductors									
29533	250	37 x .0822	1.91	48.56	6000	26,688	34.4	873	
29534	350	37 x .0973	2.13	54.18	8400	37,363	38.4	975	
29535	500	37 x .1162	2.41	61.16	12,000	53,376	43.4	1102	

Conductor Color Coding: ICEA Method 4: Black and Numbered.


BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

VFD (Variable Frequency Drive) Cable

Classic Foil/Braid Design • Low Smoke Zero Halogen




- Four-Conductor Cable (3 Circuit + Ground)
- Full-Size Insulated Ground
- Foil + Braid Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL TC-ER
- 1000V CSA AWM I/II A/B FT4

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded TC (Circuit), BC (Ground) Conductors • XLP Insulation • Overall Beldfoil® + 85% TC Braid Shielding • Black Haloarrest® Jacket									
29500T	16	26 x 30	.53	13.46	128	570	4.3	109.2	IEEE 1202/383 Sunlight Res UL Direct Burial XHHW-2, RHW-2 Conductors (16 AWG: XHHW-2 only) 90°C Wet/Dry MSHA P-07-KA070003
29501T	14	41 x 30	.60	15.24	212	943	4.8	121.9	
29502T	12	65 x 30	.65	16.51	336	1495	5.2	132.0	
29503T	10	105 x 30	.69	17.53	592	2634	5.5	139.7	
29504T	8	7 x 19 x 29	.93	23.62	768	3418	7.5	190.5	
29505T	6	7 x 19 x 27	1.02	25.91	1220	5429	8.2	203.2	
29506T	4	7 x 19 x 25	1.16	29.46	1940	8633	9.3	236.2	
29507T	2	7 x 19 x 23	1.31	33.27	3088	13,742	10.8	273.1	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

Classic Symmetrical Design • Low Smoke Zero Halogen



- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL TC-ER
- 1000V CSA AWM I/II A/B FT4


Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Conductors: Stranded TC (Circuit), BC (Ground) Conductors • XLP Insulation • Dual Spiral Copper Tape Shield • Black PVC Jacket									
29528T	1	7 x 19 x 22	1.20	30.48	2650	11,788	12.0	304.8	IEEE 1202/383 Sunlight Res UL Direct Burial XHHW-2 Conductors 90°C Wet/Dry MSHA P-07-KA070003
29529T	1/0	7 x 19 x 21	1.29	32.77	3537	15,733	12.9	327.7	
29530T	2/0	7 x 19 x 20	1.40	35.56	4200	18,682	14.0	355.6	
29531T	3/0	7 x 19 x 19	1.52	38.61	5025	22,352	15.2	386.1	
29532T	4/0	7 x 19 x 18	1.68	42.67	6670	29,670	16.8	426.7	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly

VFD (Variable Frequency Drive) Cable

**Classic Foil/Braid Design •
Thermoset Low Smoke Zero
Halogen • Marine Certified**




- Four-Conductor Cable (3 Circuit + Ground)
- Full-Size Insulated Ground
- Foil + Braid Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL TC-ER
- CSA FT4
- Marine Approvals: ABS, UL 1309, IEEE 45, IEEE 1580 Type P

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded TC Conductors • XLP Insulation • Overall Beldfoil® + 85% TC Braid Shielding • Black HaloarrestXLINK™-2 Jacket									
29500X	16	26 x 30	.53	13.46	128	570	4.3	109.2	IEEE 1202/383 Sunlight Res Oil Res II IEC 60811-2-1 Hydrocarbon Resistant XHHW-2, RHW-2 Conductors (16 AWG: XHHW-2 only) 90°C Wet/Dry MSHA Approved Suitable for Class I, II & III, Division 2 Hazardous Locations
29501X	14	41 x 30	.60	15.24	212	943	4.8	121.9	
29502X	12	65 x 30	.65	16.51	336	1495	5.2	132.0	
29503X	10	105 x 30	.69	17.53	592	2634	5.5	139.7	
29504X	8	7 x 19 x 29	.93	23.62	768	3418	7.5	190.5	
29505X	6	7 x 19 x 27	1.02	25.91	1220	5429	8.2	203.2	
29506X	4	7 x 19 x 25	1.16	29.46	1940	8633	9.3	236.2	
29507X	2	7 x 19 x 23	1.31	33.27	3088	13,742	10.8	273.1	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

**Classic Symmetrical Design •
Thermoset Low Smoke Zero
Halogen • Marine Certified**



- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 1000V UL Flexible Motor Supply Cable
- 600V UL TC-ER
- CSA FT4
- Marine approvals: ABS, UL 1309 Type, IEEE 45, IEEE 1580 Type P

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Conductors: Stranded TC (Circuit), BC (Ground) Conductors • XLP Insulation • Dual Spiral Copper Tape Shield • Black HaloarrestXLINK-2 Jacket									
29528X	1	7 x 19 x 22	1.20	30.48	2650	11,788	12.0	304.8	IEEE 1202/383 Sunlight Res Oil Res II IEC 60811-2-1 Hydrocarbon Resistant XHHW-2 Conductors 90°C Wet/Dry MSHA Approved Suitable for Class I, II & III, Division 2 hazardous locations
29529X	1/0	7 x 19 x 21	1.29	32.77	3537	15,733	12.9	327.7	
29530X	2/0	7 x 19 x 20	1.40	35.56	4200	18,682	14.0	355.6	
29531X	3/0	7 x 19 x 19	1.52	38.61	5025	22,352	15.2	386.1	
29532X	4/0	7 x 19 x 18	1.68	42.67	6670	29,670	16.8	426.7	

Conductor Color Coding: ICEA Method 4: Black and Numbered.

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly


VFD (Variable Frequency Drive) Cable

Interlocked Armor

Belden armored VFD cables are available in interlocked aluminum or steel type metal clad (MC) constructions. Belden MC cables are designed to meet demanding industrial needs with rugged durability and corrosion resistance with flexibility and easy handling.

The products use Belden Classic or Classic Symmetrical designs.

Classic Foil/Braid Design • Armored




- Four-Conductor Cable (3 Circuit + Ground)
- Foil + Braid Shield
- 600V UL MC
- NEC Hazardous Location: Classes I and II, Div. II

Part No.		Conductor AWG	Additional Features/Ratings
Aluminum	Steel		
Stranded TC Conductors • XLP Insulation (PVC for Ground) • Overall Beldfoil® + 85% TC Braid Shielding • Black PVC Jacket			
1229500	1329500	16	IEEE 1202/383 (70,000 BTU) Sunlight Res Oil Res UL Direct Burial XHHW-2, RHW-2 Conductors (16 AWG, XHHW-2 Only) 90°C Wet/Dry
1229501	1329501	14	
1229502	1329502	12	
1229503	1329503	10	
1229504	1329504	8	
1229505	1329505	6	
1229506	1329506	4	
1229507	1329507	2	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.

Classic Symmetrical Design • Armored



- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 600 V UL MC
- NEC Hazardous Location: Classes I and II, Div. II

Part No.		Conductor AWG	Additional Features/Ratings
Aluminum	Steel		
Stranded TC (Circuit), BC (Ground) Conductors • XLP Insulation (PVC for Ground) • Dual Copper Tape Shield • Black PVC Jacket			
1229528	1329528	1	IEEE 1202/383 (70,000 BTU) Sunlight Res Oil Res UL Direct Burial XHHW-2 Rated Circuit Conductors 90°C Wet/Dry
1229529	1329529	1/0	
1229530	1329530	2/0	
1229531	1329531	3/0	
1229532	1329532	4/0	

Conductor Color Coding: ICEA Method 4: Black and Numbered, Green/Yellow Ground.


BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



VFD (Variable Frequency Drive) Cable

1000V CSA Cable

CSA Symmetrical Design



- Three-Conductor Cable (3 Circuit + 3 Ground)
- Dual Spiral Copper Tape Shield
- 1000V CSA TC
- CSA C22.2 #230
- CSA C22.2 #38
- CSA FT-4

Part No.	Conductor		OD (Nom)		Pulling Tension (Max)		Bend Radius (Min)		Additional Features/Ratings
	AWG	Stranding	Inch	mm	Lbs	N	Inch	mm	
Stranded BC Conductors • XLP Insulation • Dual Spiral Copper Cable Shield • Black PVC Jacket									
29550C	14	7 x 22	0.43	10.92	162	75	4.3	109.2	IEEE 1202/383 Sunlight Res Oil Res Direct Burial RW90 Conductors 90°C Wet/Dry
29551C	12	7 x 20	0.46	11.68	258	117	4.6	116.8	
29552C	10	7 x 18	0.51	12.95	444	201	5.1	129.5	
29553C	8	7 x 16	0.65	16.51	576	261	6.5	165.1	
29554C	6	7 x 14	0.72	18.28	915	415	7.3	185.4	
29555C	4	7 x 12	0.83	21.08	1450	658	8.3	210.8	
29556C	2	7 x 10	0.99	25.15	2300	1043	10.0	254.0	
29557C	1	19 x 14	1.13	28.70	2650	1202	11.5	292.1	
29558C	1/0	19 x 13	1.21	30.73	3537	1604	12.3	312.4	
29559C	2/0	19 x 12	1.31	33.27	4200	1905	13.3	337.8	
29560C	3/0	19 x 11	1.42	36.07	5025	2279	14.3	363.2	
29561C	4/0	19 x 10	1.54	39.12	6670	3025	15.5	393.7	

Conductor Color Coding: ICEA Method 4: Black and Numbered.

BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly

Belden Infinity® Flexible Automation Cable

Overview and Application Guide

Belden Infinity is a complete line of control, data, video, and power cables specifically designed to handle the rigorous speeds and near-constant motion encountered in automated equipment such as robots, pick and place machines, automatic handling systems, multi-axis machine tools, and conveyor systems.

When the application demands highly flexible cables offering exceptional cable life and performance, specify Belden Infinity.

Belden Infinity Means More Performance and Longer Life

Reduced Cable Memory—Belden Infinity's unique design and neutralized cabling results in cables that are relaxed, with almost no memory.

Greater Flex Life—Belden Infinity cables offer superior flexibility and are able to handle the vigorous motions and high speeds encountered in automated equipment.

Greater System Uptime—Belden Infinity cables combine specialized manufacturing techniques with precision copper stranding and rugged insulation and jacketing compounds to maximize flex life and reliability.

No Talc Problems—Unlike the potentially harmful talc used in other cables, Belden's non-toxic, non-irritating slipper compound facilitates flexing and also complies with OSHA regulations. It's safer for employees and operators and is less likely to contaminate solder joints or mechanical compounds.

CE Conformity—All Belden Infinity cables are CE marked per the Conformité Européenne low voltage directive, allowing trade of product in Europe.

Custom Conductor Counts—Available upon request.

Product Series Descriptions

- **C-TC+**—The C-TC+ series is designed for C-track and extreme flex applications up to 10 million flex cycles*. This series utilizes super fine stranding and some of the tightest lay lengths allowed by UL, providing outstanding flex life.
- **FCC**—The FCC series is a cost-effective alternative for C-track and moderate flexing applications rated up to 1 million flex cycles.

- **Flex Data Cables**—Belden Infinity Flex Data cables are designed for industrial applications where precise data transmission is combined with high-flexing. These cables are ideal for effective operation of computer controlled equipment or other automated production processes, even in harsh environments.

- **Flex Vision**—Belden Infinity Vision cables are continuous flex video cables designed for machine vision applications. They are ideal for motion-controlled video and with inspection and measurement equipment.

*Based on proper installation techniques in a C-track cable guide.

Application Guide

Belden Infinity Series	C-Track Systems	Multi-Axis Machining	Robotics	Automated Assembly Systems	Material Handling Systems	Pick & Place Systems	Automated Storage Retrieval	Gantry Systems	Machine Vision	Motion-Controlled Video	Inspection & Measure Equip.	Festooning	Servo	Power	Wind
------------------------	-----------------	----------------------	----------	----------------------------	---------------------------	----------------------	-----------------------------	----------------	----------------	-------------------------	-----------------------------	------------	-------	-------	------

FCC Oil & abrasion resistant 600V UL & CSA rated Life Expectancy: Over 1 million flex cycles*	●	●		●	●	●	●	●			●	●	●	●	●
C-TC+ Oil & abrasion resistant 600V UL & CSA rated Life Expectancy: Over 10 million flex cycles*	★	★	●	★	★	★	★	★			★	★	★	★	★
DATA Oil & abrasion resistant 300V UL & CSA rated Life Expectancy: Over 1 million flex cycles*	●	●		●	●	●	●	●			●	●			
VISION 30V UL & CSA rated Life Expectancy: Over 1 million flex cycles*	●	●		●	●	●	●	●	★	+	+	●			


● Good + Better ★ Best

*Based on proper installation techniques in a C-track cable guide.

Belden Infinity® Flexible Automation Cable

600V C-TC+ Control Cables for Extreme Flexing
(10 Million Flex Cycles)

C-TC+ Control Cables • Unshielded



- UL AWM 2587 (600V, 90°C)
- CSA AWM I/II A/B 600V 105°C
- Sunlight Res
- Oil Res I/II
- UL Direct Burial
- IEEE 1202/383 FT4
- -40°C to 90°C (Cold Impact)
- -5°C to 90°C (Flexing)

Part No.	Conductors		Pull Tension (Max)		OD (Nom)		Insulation Thickness		Jacket Thickness		Additional Features/Ratings
	Circuit	Ground (Grn/Yel)	Lbs	N	Inch	mm	Inch	mm	Inch	mm	

Stranded BC Conductors • PVC Insulation • Abrasion Resistant Orange Belflex® TPE Jacket

20 AWG • 74 x 38

7101W	2	1	45	200	.237	6.02					
7102W	3	1	59	262	.256	6.50	.015	.38	.037	.94	
7105W	8	1	130	578	.376	9.55	.015	.38	.042	1.07	UL PLTC
7106W	11	1	178	792	.417	10.59					
7107W	17	1	260	1156	.480	12.19	.015	.38	.053	1.35	
7108W	24	1	370	1645	.563	14.30					

Stranded BC Conductors • PVC/Nylon Insulation • Abrasion Resistant Orange Belflex TPE Jacket

18 AWG • 114 x 38

7110W	2	1	69	307	.289	7.34					
7111W	3	1	92	409	.313	7.95	.020	.51	.047	1.19	
7113W	6	1	161	716	.390	9.91					
7116W	17	1	400	1779	.576	14.63	.020	.51	.063	1.60	
7117W	24	1	575	2558	.678	17.22					

16 AWG • 190 x 38

7122W	2	1	114	507	.333	8.46	.020	.51	.047	1.19	UL AWM 21486 (1000V, 90°C) UL TC-ER UL WTTC 1000V C(UL) Type TC & CIC FT4
7125W	6	1	266	1183	.460	11.68					
7126W	8	1	342	1521	.561	14.25					
7127W	11	1	456	2028	.582	14.78	.020	.51	.063	1.60	
7129W	24	1	950	4226	.800	20.32					

12 AWG • 413 x 38

7145W	3	1	330	1468	.446	11.33	.020	.51	.047	1.19	
-------	---	---	-----	------	------	-------	------	-----	------	------	--

Conductor Color Coding: Black, Numbered, Green/Yellow Ground

BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden Infinity® Flexible Automation Cable

600V C-TC+ Control Cables for Extreme Flexing
(10 Million Flex Cycles)

C-TC+ Control Cables • Braid Shielded • Double Jacketed



- UL AWM 2587 (600V, 90°C)
- CSA AWM I/II A/B 600V 105°C
- Sunlight Res
- Oil Res. I/II
- UL Direct Burial
- IEEE 1202/383 FT4
- -40°C to 90°C (Cold Impact)
- -5°C to 90°C (Flexing)

Part No.	Conductors		Pull Tension (Max)		OD (Nom)		Insulation Thickness		Inner Jacket Thickness		Outer Jacket Thickness		Additional Features/Ratings
	Circuit	Ground (Grn/Yel)	Lbs	N	Inch	mm	Inch	mm	Inch	mm	Inch	mm	

Stranded BC Conductors • PVC Insulation • TPE Inner Jacket • 85% TC Braid Shield • Abrasion Resistant Orange Belflex® TPE Jacket

20 AWG • 74 x 38

7106WS	11	1	194	863	.489	12.42	.015	.38	.025	.64	.053	1.35	UL PLTC
--------	----	---	-----	-----	------	-------	------	-----	------	-----	------	------	---------

Stranded BC Conductors • PVC/Nylon Insulation • TPE Inner Jacket • 85% TC Braid Shield • Abrasion Resistant Orange Belflex TPE Jacket

18 AWG Stranded • 114 x 38

7111WS	3	1	92	409	.391	9.93	.021	.53	.025	.64	.047	1.19	
--------	---	---	----	-----	------	------	------	-----	------	-----	------	------	--

16 AWG Stranded • 190 x 38

7123WS	3	1	152	676	.435	11.05	.021	.53	.025	.64	.047	1.19	UL AWM 21486 (1000V, 90°C) UL TC-ER UL WTTTC 1000V C(UL) Type TC & CIC FT4
7129WS	24	1	950	4226	.918	23.32	.021	.53	0.63	1.60	.083	2.11	

14 AWG Stranded • 266 x 38

7136WS	3	1	208	925	.488	12.40	.021	.53	.030	.76	.053	1.35	
--------	---	---	-----	-----	------	-------	------	-----	------	-----	------	------	--

Conductor Color Coding: Black, Numbered, Green/Yellow Ground.

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride

Belden Infinity® Flexible Automation Cable

600V FCC Control Cables for Moderate Flexing
(1 Million Flex Cycles)

FCC Control Cable • Unshielded



- UL AWM 2587 (600V, 90°C)
- CSA AWM I/II A/B 600V 105°C
- Sunlight Res
- Oil Res I/II
- UL Direct Burial
- IEEE 1202/383 FT4
- -40° to 90°C (Cold Impact)
- -5° to 90°C (Flexing)

Part No.	Conductors		Pull Tension (Max)		OD (Nom)		Insulation Thickness		Jacket Thickness		Additional Features/Ratings
	Circuit	Ground (Grn/Yel)	Lbs	N	Inch	mm	Inch	mm	Inch	mm	

Stranded BC Conductors • PVC Insulation • Abrasion Resistant Chrome Belflex® TPE Jacket

20 AWG • 10 x 30

7400W	2	—	26	116	.211	5.36					
7401W	2	1	39	173	.221	5.61					
7402W	3	1	52	231	.238	6.05	.015	.38	.037	.94	
7403W	4	1	65	289	.257	6.53					
7404W	6	1	91	405	.309	7.85					UL PLTC
7405W	8	1	117	520	.345	8.76					
7406W	11	1	156	693	.363	9.22	.015	.38	.042	1.07	
7407W	17	1	234	1041	.441	11.20					
7408W	24	1	325	1445	.517	13.13	.015	.38	.053	1.35	

Stranded BC Conductors • PVC/Nylon Insulation • Abrasion Resistant Chrome Belflex TPE Jacket

18 AWG • 16 x 30

7409W	2	—	50	222	.264	6.71	.022	.56	.040	1.02	
7410W	2	1	69	307	.289	7.34					
7411W	3	1	92	409	.313	7.95					
7412W	4	1	115	511	.339	8.61					
7413W	6	1	161	716	.390	9.91	.020	.51	.047	1.19	
7414W	8	1	252	1121	.451	11.46					
7415W	11	1	276	1227	.468	11.89					
7416W	17	1	414	1841	.576	14.63					
7417W	24	1	575	2557	.678	17.22	.020	.51	.063	1.60	
7418W	33	1	782	3478	.762	19.36					

UL AWM 21486 (1000V, 90°C)
UL TC-ER
UL WTTC 1000V
C(UL) Type TC & CIC FT4

16 AWG • 26 x 30

7421W	2	—	76	338	.301	7.65					
7422W	2	1	105	467	.316	8.03					
7423W	3	1	140	623	.342	8.69					
7424W	4	1	175	778	.371	9.42	.020	.51	.047	1.19	
7425W	6	1	245	1090	.434	11.02					
7426W	8	1	315	1401	.498	12.65					
7427W	11	1	420	1868	.550	13.97					
7428W	17	1	630	2802	.636	16.15	.020	.51	.063	1.60	
7429W	24	1	875	3892	.752	19.10					
7430W	33	1	1190	5293	.882	22.40	.020	.51	.085	2.16	

Conductor Color Coding: Black, Numbered, Green/Yellow Ground

BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden Infinity® Flexible Automation Cable *(continued)*

600V FCC Control Cables for Moderate Flexing
(1 Million Flex Cycles)

FCC Control Cable • Unshielded



- UL AWM 2587 (600V, 90°C)
- CSA AWM I/II A/B 600V 105°C
- Sunlight Res
- Oil Res I/II
- UL Direct Burial
- IEEE 1202/383 FT4
- -40° to 90°C (Cold Impact)
- -5° to 90°C (Flexing)

Part No.	Conductors		Pull Tension (Max)		OD (Nom)		Insulation Thickness		Jacket Thickness		Additional Features/Ratings
	Circuit	Ground (Grn/Yel)	Lbs	N	Inch	mm	Inch	mm	Inch	mm	

Stranded BC Conductors • PVC/Nylon Insulation • Abrasion Resistant Chrome Belflex® TPE Jacket

14 AWG • 41 x 30

7435W	2	1	201	894	.329	8.36					
7436W	3	1	268	1192	.381	9.68	.020	.51	.047	1.19	
7438W	6	1	469	2086	.487	12.37					
7439W	8	1	603	2682	.593	15.06	.020	.51	.063	1.60	
7440W	11	1	804	3576	.617	15.67					
7442W	24	1	1675	7451	.895	22.73	.020	.51	.085	2.16	

12 AWG • 65 x 30

7444W	2	1	253	1125	.389	9.88	.020	.51	.047	1.19	UL AWM 21486 (1000V, 90°C) UL TC-ER UL WTTC 1000V C(UL) Type TC & CIC FT4
7445W	3	1	338	1503	.424	10.77					

10 AWG • 105 x 30

7447W	3	1	672	2989	.546	13.87	.025	.64	.063	1.60	
-------	---	---	-----	------	------	-------	------	-----	------	------	--

6 AWG • 266 x 30

7453W	3	1	1472	6548	.875	22.23	.040	1.02	.085	2.16	
-------	---	---	------	------	------	-------	------	------	------	------	--

Conductor Color Coding: Black, Numbered, Green/Yellow Ground

BC = Bare Copper • PVC = Polyvinyl Chloride

Belden Infinity® Flexible Automation Cable

600V FCC Control Cables for Moderate Flexing
(1 Million Flex Cycles)

FCC Control Cables • Braid Shielded • Double Jacketed



- UL AWM 2587 (600V, 90°C)
- CSA AWM I/II A/B 600V 105°C
- Sunlight Res
- Oil Res I/II
- UL Direct Burial
- IEEE 1202/383 FT4
- -40° to 90°C (Cold Impact)
- -5° to 90°C (Flexing)

Part No.	Conductors		Pull Tension (Max)		OD (Nom)		Insulation Thickness		Inner Jacket Thickness		Outer Jacket Thickness		Additional Features/Ratings
	Circuit	Ground (Grn/Yel)	Lbs	N	Inch	mm	Inch	mm	Inch	mm	Inch	mm	

Stranded BC Conductors • PVC Insulation • TPE Inner Jacket • 85% TC Braid Shield • Abrasion Resistant Chrome Belflex® TPE Jacket

20 AWG • 10 x 30

7401WS	2	1	39	173	.303	7.70	.015	.38	.025	.64	.040	1.02	UL PLTC
7403WS	4	1	65	289	.339	8.61							
7404WS	6	1	91	405	.409	10.39							
7408WS	24	1	325	1445	.595	15.11	.015	.38	.025	.64	.053	1.35	

Stranded BC Conductors • PVC/Nylon Insulation • TPE Inner Jacket • 85% TC Braid Shield • Abrasion Resistant Chrome Belflex TPE Jacket

18 AWG • 16 x 30

7410WS	2	1	69	307	.367	9.32							UL AWM 21486 (1000V, 90°C) CSA AWM I/II A/B UL TC-ER UL WTTTC 1000V C(UL) Type TC & CIC FT4
7411WS	3	1	92	409	.391	9.93	.020	.51	.025	.64	.047	1.19	
7413WS	6	1	161	716	.468	11.89							
7415WS	11	1	276	1227	.578	14.68	.020	.51	.025	.64	.060	1.52	
7416WS	17	1	414	1842	.654	16.61	.020	.51	.025	.64	.063	1.60	
7417WS	24	1	575	2557	.756	19.20							

16 AWG • 26 x 30

7422WS	2	1	105	467	.394	10.01	.020	.51	.025	.64	.047	1.19	UL AWM 21486 (1000V, 90°C) CSA AWM I/II A/B UL TC-ER UL WTTTC 1000V C(UL) Type TC & CIC FT4
7423WS	3	1	140	623	.420	10.67							
7427WS	11	1	420	1868	.628	15.95	.020	.51	.025	.64	.063	1.60	
7428WS	17	1	630	2802	.714	18.14							
7429WS	24	1	875	3892	.870	22.10	.020	.51	.025	.64	.080	2.03	

14 AWG • 41 x 30

7435WS	2	1	201	894	.407	10.34	.020	.51	.025	.64	.047	1.19	UL AWM 21486 (1000V, 90°C) CSA AWM I/II A/B UL TC-ER UL WTTTC 1000V C(UL) Type TC & CIC FT4
7438WS	6	1	469	2086	.598	15.19	.020	.51	.025	.64	.060	1.52	

12 AWG • 65 x 30

7445WS	3	1	338	1503	.544	13.82	.020	.51	.030	.76	.060	1.52	
--------	---	---	-----	------	------	-------	------	-----	------	-----	------	------	--

10 AWG • 105 x 30

7447WS	3	1	546	2429	.644	16.36	.025	.64	.035	.89	.063	1.60	
--------	---	---	-----	------	------	-------	------	-----	------	-----	------	------	--

8 AWG • 168 x 30

7450WS	3	1	872	3879	.910	23.11	.025	.64	.040	1.02	.085	2.16	
--------	---	---	-----	------	------	-------	------	-----	------	------	------	------	--

Conductor Color Coding: Black, Numbered, Green/Yellow Ground.

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden Infinity® Flexible Automation Cable

300V Flex Paired Data Cables
(1 Million Flex Cycles)

Paired Cable • Shielded



- 24 AWG (41 x 40) BC Conductors
- Foam Polyethylene Insulation with Skin
- Overall Beldfoil® + 85% TC Braid Shield
- Green PVC Jacket
- 24 AWG (41 x 40) TC Drain Wire
- NEC: CM
- CEC: CM
- -20°C to +60°C
- -5°C to +60°C Flexing

Part No.	Pairs	OD (Nom)		Capacitance (Max)		Additional Features/ Ratings
		Inch	mm	pF/Ft	pF/m	

24 AWG (41 x 40) BC Conductors • Foam Polyethylene Insulation with Skin • Overall Beldfoil + 85% TC Braid Shield • 24 AWG (41 x 40) TC Drain Wire • Green PVC Jacket

120 Ohm Impedance • RS-232 and RS-485

Part No.	Pairs	OD (Nom) Inch	OD (Nom) mm	Capacitance (Max) pF/Ft	Capacitance (Max) pF/m	Additional Features/ Ratings
7200A	1	.240	6.10	15.0	49.2	Oil Res II
7201A	2	.322	8.18			
7202A	3	.347	8.81			
7203A	4	.362	9.20			

100 Ohm Impedance • RS-232 and RS-422

7205A	1	.232	5.89	14.0	45.9	Oil Res II
-------	---	------	------	------	------	------------

150 Ohm Impedance • RS-232 and RS-485

7206A	1	.302	7.67	10.0	32.8	
-------	---	------	------	------	------	--

Conductor Color Coding: One-Pair Cable: White, Blue

- Multi-Pair Configurations:
- 1 White/Blue Stripe—Blue/White Stripe
 - 2 White/Orange Stripe—Orange/White Stripe
 - 3 White/Green Stripe—Green/White Stripe
 - 4 White/Brown Stripe—Brown/White Stripe

75 Ohm Flex Vision Coax Cables
(1 Million Flex Cycles)

75 Ohm Coax



- UL AWM 1354 (30V, 80°C)
- CSA AWM I/II A/B FT1
- -40°C to +80°C

Part No.	Core OD (Nom)		Cable OD (Nom)		Additional Features/ Ratings
	Inch	mm	Inch	mm	

Foam Polyethylene Insulation • 95% TC "French Braid" Shield • Matte Blue Belflex Jacket

30 AWG Stranded • 7 x 38 • Tinned Copper Alloy Conductor

7500A	.056	1.42	.110	2.79	Sub-Mini Type
-------	------	------	------	------	---------------

25 AWG Stranded • 19 x 38 • BC Conductor

7501A	.090	2.29	.146	3.71	Mini Type
-------	------	------	------	------	-----------

22 AWG Stranded • 19 x 34 • BC Conductor

7502A	.146	3.71	.242	6.15	RG-59 Type
-------	------	------	------	------	------------

20 AWG Stranded • 7 x 15 x 40 • BC Conductor

7503A	.185	4.70	.275	6.99	RG-6/U Type
-------	------	------	------	------	-------------

16 AWG Stranded • 7 x 37 x 40 • BC Conductor

7504A	.285	7.24	.405	10.29	RG-11 Type
-------	------	------	------	-------	------------

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

300V Power-Limited Tray Cables Overview

Construction

Soft annealed bare or tinned copper with PVC flame retardant insulation and jacket. Other insulation and jacket options are available (see table below). Communication wire included on all multi-pair/multi-triad 1000 and 3000 series part numbers, 22 AWG (7 x 30) bare copper, orange PVC insulation. Nylon rip cord included in all PVC/PVC instrumentation cables.

Other Construction Options:

UL Listed for PLTC	
Insulation/Jacket	Max. Temp Rating
XLP/PVC	90°C
XLP/CPE	90°C
PVC/PVC	105°C
PVC/CPE	105°C
XLP/Haloarrest®	90°C

Armoring Capabilities

Belden also has the capability to protect electronic, instrumentation and control cables with interlocking or continuous armor and Belclad® corrugated protective metal tapes.

Application

Cable jackets are resistant to sunlight, moisture and vapor penetration. PVC/PVC constructions, with 3 conductors or more and 20 AWG or larger, are suitable for direct burial.

Unshielded

Twisted non-shielded pairs and triads provide a minimal OD allowing greater tray and conduit fill. Non-shielded instrument pairs may be utilized when recommended by the instrument manufacturer and used in a metallic conduit.

Overall Shield

Recommended for use in instrumentation applications where signals are transmitted in excess of 100 millivolts except in areas where high voltage and current sources create excessive noise interference. The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness.

Individually Shielded and Overall Shielded

Individually shielded pairs or triads with an overall shield are recommended for use in instrumentation applications where optimum noise rejection is required. Individual pair/triad shields are fully isolated from each other and contain a separate drain wire for grounding to provide maximum protection from crosstalk and common mode interference. Cables with an overall shield provide additional electrostatic noise protection.

Specifications

- UL Subject 13
- UL Subject 2250
- NEC Article 725 Class 2 and Class 3 Circuits
- NEC Type PLTC Listed, which is approved for cable tray use in Class 1, Division 2, hazardous areas and non-hazardous areas, cable trays, raceways, conduit and supported by messenger wires.
- Sunlight-resistant.
- NEC Type ITC per Article 727. ITC cables may carry up to 5 amps at 150V, which is significantly greater than that allowed for PLTC only cables. ITC cables may also be installed in specific applications, per the NEC, in addition to those allowed for PLTC.
- UL 1685 (UL 1581) Vertical Tray Flame Test comparable to IEEE 383-1974 (70,000 BTU/hr.) Flame Test.
- PVC/PVC constructions are CMG, FT4, IEEE 1202 and IEEE 383-2003 rated, and meet ICEA T-29-520 Flame Test.
- Design options—call 1-800-BELDEN-1.

PLTC-ER/ITC-ER

As an option, Belden offers all PVC insulated, PVC jacketed instrumentation cables, and several other insulation and jackets, with a PLTC-ER (Exposed Run) and ITC-ER ratings.

Per NEC Article 725, a PLTC-ER rated cable may be installed in an industrial establishment between a cable tray and the utilization equipment or device. A PLTC-ER rated cable must meet the crush and impact requirements of UL Type MC cable. By eliminating the need for metal conduit and/or armor, using a PLTC-ER rated cable results in savings in both installation and maintenance.

Armoring Options

Code		
Overall Jacket Prefix	Armor Prefix	Base Part No.
3	4	4-digit base number

Overall Jacket

Code	Material
1	PVC
3	CPE
4	TPE
5	HDPE
7	Haloarrest

Armor

Code	Material
2	Aluminum Interlock
3	Steel Interlock
4	Aluminum Belclad®
5	Steel Belclad
6	Copper Belclad
8	Continuous Armor

Example: 343016A is cable part no. 3016A with CPE outer jacket and aluminum Belclad tape.

CPE = Chlorinated Polyethylene • HDPE = High-Density Polyethylene • LSZH = Low Smoke Zero Halogen • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly

UL Instrumentation Cable

300V Power-Limited Tray Cables

22 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs		Inch	mm	Inch	mm	Inch	mm

22 AWG • Unshielded

Stranded (7 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9407	1	E2	19	2.00	50.80	.198	5.03	.037	.94	

22 AWG • Overall Beldfoil® Shielding

Stranded (7 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9322	1	E2	28	2.00	50.80	.201	5.10	.037	.94	
9512	2	E2	46	3.00	76.20	.310	7.82	.042	1.07	
9513	3	E2	63	3.25	82.55	.324	8.23			
9514	4	E2	80	3.50	88.90	.356	9.04			
9516	6	E2	118	4.25	107.95	.418	10.62	.053	1.35	
9520	9	E2	172	4.75	120.65	.482	12.29			
9521	11	E2	200	5.35	135.89	.506	12.85			
9524	15	E2	280	6.00	152.40	.594	15.09	.063	1.60	
9526	19	E2	350	6.33	160.78	.644	16.36			
9527	27	E2	500	7.50	190.50	.763	19.38			

22 AWG • Individually Beldfoil Shielded Pairs

Stranded (7 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9328	2	E2	54	3.00	76.20	.323	8.20	.042	1.07	
9329	3	E2	54	3.50	88.90	.341	8.66			
9330	4	E2	110	3.50	88.90	.372	9.45			
9331	6	E2	101	4.33	109.98	.457	11.61	.053	1.35	
9332	9	E2	160	5.00	127.00	.530	13.46			
9333	11	E2	160	5.50	139.70	.592	15.04			
9335	19	E2	264	6.50	165.10	.711	18.06	.063	1.60	

TC = Tinned Copper • PVC = Polyvinyl Chloride

UL Instrumentation Cable

300V Power-Limited Tray Cables

22 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

22 AWG • Overall Beldfoil® Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 30) BC Conductors • PVC Insulation • PVC Jacket									
3000A	2	E1	46	3.00	76.20	.310	7.87	.043	1.09
3004A	4	E1	80	3.50	88.90	.357	9.01	.042	1.07
3006A	8	E1	172	4.75	120.65	.450	11.43		
3008A	12	E1	210	5.00	127.00	.536	13.61	.053	1.35
3010A	16	E1	290	6.00	152.40	.594	15.09		
3012A	24	E1	440	7.50	190.50	.749	19.02	.065	1.65
3014A	50	E1	915	9.50	241.30	1.017	25.80	.075	1.91

22 AWG • Individually Beldfoil Shielded Pairs and Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 30) BC Conductors • PVC Insulation • PVC Jacket									
3001A	2	E1	54	3.25	82.55	.324	8.23	.042	1.07
3005A	4	E1	115	3.50	88.90	.360	9.14	.043	1.09
3007A	8	E1	250	5.25	133.35	.497	12.62		
3009A	12	E1	300	5.75	146.05	.570	14.48	.053	1.35
3011A	16	E1	350	6.25	158.75	.674	17.12	.064	1.63
3013A	24	E1	540	8.00	203.20	.800	20.32	.065	1.65
3015A	50	E1	1330	10.50	266.70	1.050	26.67	.075	1.91

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Instrumentation Cable

300V Power-Limited Tray Cables

22 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res

- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

22 AWG • Unshielded

Stranded (7 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9491	1	E1	29	2.00	50.80	.208	5.28	.037	.94

22 AWG • Beldfoil® Shielding

Stranded (7 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9363	1	E1	29	2.00	50.80	.208	5.28	.037	.94

22 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res

- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

22 AWG • Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 30) BC Conductors • PVC Insulation • PVC Jacket									
3002A	2	E1	62	3.50	88.90	.330	8.38	.043	1.09

22 AWG • Individually Beldfoil Shielded Triads and Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 30) BC Conductors • PVC Insulation • PVC Jacket									
3003A	2	E1	82	3.25	82.55	.330	8.38	.043	1.09

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

300V Power-Limited Tray Cables

20 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

20 AWG • Unshielded

Stranded (19 x 32) TC Conductors • PVC Insulation • PVC Jacket									
9408	1	E2	31	2.0	50.80	.214	5.44	.037	.94

20 AWG • Overall Beldfoil® Shielding

Stranded (19 x 32) TC Conductors • PVC Insulation • PVC Jacket									
9320	1	E2	40	2.0	50.80	.217	5.51	.037	.94

20 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

20 AWG • Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 28) BC Conductors • PVC Insulation • PVC Jacket									
1033A	1	E1	42	2.25	57.15	.213	5.41	.037	.94
3016A	2	E1	92	3.75	95.25	.332	8.43	.042	1.07
1056A	4	E1	135	4.25	107.95	.408	10.36		
1057A	8	E1	247	5.00	127.00	.472	11.99	.053	1.35
1058A	12	E1	359	6.00	152.40	.564	14.33		
1059A	16	E1	232	6.50	165.10	.649	16.48		
1060A	24	E1	695	8.25	209.55	.786	19.96	.064	1.63
1061A	36	E1	1031	10.00	254.00	.960	24.38		
1062A	50	E1	1423	11.50	292.10	1.117	28.37	.074	1.88

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Instrumentation Cable

300V Power-Limited Tray Cables

20 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

20 AWG • Individually Beldfoil® Shielded Pairs and Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 28) BC Conductors • PVC Insulation • PVC Jacket									
1075A	2	E1	97	3.75	95.25	.337	8.56	.042	1.07
1076A	4	E1	171	4.50	114.30	.411	10.44	.053	1.35
1077A	8	E1	320	5.50	139.70	.514	13.06		
1078A	12	E1	468	6.75	171.45	.637	16.18	.064	1.63
1079A	16	E1	617	7.50	190.50	.704	17.88		
1091A	20	E1	765	8.25	209.55	.780	19.81		
1080A	24	E1	914	9.00	228.60	.863	21.92	.074	1.88
1081A	36	E1	1359	10.50	266.70	1.035	26.29		
1082A	50	E1	1878	12.75	323.85	1.215	30.86		

20 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

20 AWG • Unshielded

Stranded (19 x 32) TC Conductors • PVC Insulation • PVC Jacket									
9492	1	E1	46	2.25	57.15	.225	5.72	.037	.94

20 AWG • Beldfoil Shielding

Stranded (19 x 32) TC Conductors • PVC Insulation • PVC Jacket									
9364	1	E1	46	2.25	57.15	.228	5.79	.037	.94

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. <i>(1000 and 3000 Series Cables Only)</i>	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

300V Power-Limited Tray Cables

20 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

20 AWG • Beldfoil® Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 28) BC Conductors • PVC Insulation • PVC Jacket									
1526A	1	E1	42	2.20	55.88	.215	5.46	.037	.94
3017A	2	E1	97	3.60	91.44	.360	9.14		
3020A	4	E1	174	4.75	120.65	.470	11.94	.055	1.40
3021A	8	E1	330	5.00	127.00	.560	14.22		
3022A	12	E1	485	7.00	177.80	.710	18.03	.066	1.68
3023A	16	E1	600	7.75	196.85	.821	20.85	.064	1.63
3024A	24	E1	920	9.25	234.95	1.031	26.19	.074	1.88

20 AWG • Individually Beldfoil Shielded Triads and Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 28) BC Conductors • PVC Insulation • PVC Jacket									
3018A	2	E1	102	3.75	95.25	.372	9.45	.055	1.40
1083A	4	E1	228	4.50	114.30	.451	11.46	.053	1.35
1084A	8	E1	432	5.75	146.05	.575	10.81		
1085A	12	E1	636	7.15	181.61	.714	18.14	.064	1.63
1092A	16	E1	841	7.90	200.66	.793	20.14		
1086A	24	E1	1250	9.90	251.46	.992	25.20		
3067A	36	E1	1875	13.00	330.20	1.292	32.82	.074	1.88

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Instrumentation Cable

300V Power-Limited Tray Cables

18 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs		Inch	mm	Inch	mm	Inch	mm

18 AWG • Unshielded

Stranded (19 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9409	1	E2	19	2.25	57.15	.230	5.84	.037	.94	

18 AWG • Overall Beldfoil® Shielding

Stranded (19 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9318	1	E2	60	2.25	57.15	.233	5.92	.037	.94	
9552	2	E2	65	3.70	93.98	.368	9.34	.042	1.07	
9553	3	E2	145	4.10	104.14	.411	10.44	.053	1.35	
9554	4	E2	187	4.50	114.30	.447	11.35			
9556	6	E2	270	5.00	127.00	.497	12.62	.063	1.60	
9559	9	E2	395	5.80	147.32	.579	14.71			
9563	11	E2	478	6.75	171.45	.665	16.89			
9565	15	E2	640	7.50	190.50	.739	18.77			

18 AWG • Individually Beldfoil Shielded Pairs

Stranded (19 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9368	2	E2	125	3.75	95.25	.378	9.60	.042	1.07	
9369	3	E2	220	4.25	107.95	.423	10.74	.053	1.35	
3029A	4	E1	296	4.50	114.30	.461	11.71			
9388	4	E2	296	4.60	116.84	.461	11.71			
9389	6	E2	440	5.25	133.35	.538	13.67	.064	1.63	
9390	9	E2	666	6.50	165.10	.652	16.56			
9391	11	E2	815	7.25	184.15	.729	18.52			
9392	15	E2	1100	8.00	203.20	.808	20.52			

TC = Tinned Copper • PVC = Polyvinyl Chloride

UL Instrumentation Cable

300V Power-Limited Tray Cables

18 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

18 AWG • Overall Beldfoil® Shield • 22 AWG Orange Communication Wire

Stranded (7 x 26) BC Conductors • PVC Insulation • PVC Jacket									
1032A	1	E1	67	2.50	63.50	.233	5.92	.037	.94
3025A	2	E1	121	3.50	88.90	.375	9.53	.042	1.07
1529A	3	E1	165	4.25	107.95	.415	10.54		
1466A	4	E1	211	4.50	114.30	.452	11.48	.053	1.35
1467A	8	E1	390	5.50	139.70	.523	13.28		
1468A	12	E1	560	6.75	171.45	.673	17.09	.064	1.63
3034A	16	E1	640	7.25	184.15	.713	18.11	.066	1.68
1471A	24	E1	1105	9.25	234.95	.932	23.67		
1472A	36	E1	1644	10.50	266.70	1.062	26.97	.074	1.88
3041A	50	E1	2240	12.75	323.85	1.240	31.50		

18 AWG • Individually Beldfoil Shielded Pairs and Overall Beldfoil Shield • 22 AWG Orange Communication Wire

Stranded (7 x 26) BC Conductors • PVC Insulation • PVC Jacket									
1474A	2	E1	149	4.00	101.60	.408	10.16		
1475A	4	E1	267	4.75	120.65	.468	11.89	.053	1.35
1476A	8	E1	501	6.00	152.40	.594	15.10		
1477A	12	E1	779	7.25	184.15	.737	18.72	.064	1.63
3035A	16	E1	725	8.50	215.90	.836	21.20		
1480A	24	E1	1443	10.25	260.35	1.019	25.88	.074	1.88
1481A	36	E1	2148	11.75	298.45	1.163	29.54		
3042A	50	E1	2935	14.00	355.60	1.389	35.28	.084	2.13

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

300V Power-Limited Tray Cables

18 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs		Inch	mm	Inch	mm	Inch	mm

18 AWG • Unshielded

Stranded (19 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9493	1	E1	62	2.25	57.15	.242	6.15	.037	.94	

18 AWG • Beldfoil® Shielding

Stranded (19 x 30) TC Conductors • PVC Insulation • PVC Jacket										
9365	1	E1	74	2.50	63.50	.245	6.22	.037	.94	

18 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs		Inch	mm	Inch	mm	Inch	mm

18 AWG • Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 26) BC Conductors • PVC Insulation • PVC Jacket										
1036A	1	E1	90	2.40	60.96	.236	5.99	.037	.94	
3027A	2	E1	165	4.25	107.95	.420	10.67	.055	1.40	
3030A	4	E1	240	4.50	114.30	.521	13.20	.064	1.63	
3032A	8	E1	501	5.75	146.05	.580	14.70	.077	1.96	
3036A	16	E1	1050	9.00	228.60	.900	22.86			
3038A	24	E1	1450	10.25	260.35	1.020	25.91			

18 AWG • Individually Beldfoil Shielded Triads and Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 26) BC Conductors • PVC Insulation • PVC Jacket										
3028A	2	E1	175	4.50	114.30	.450	11.43	.055	1.40	
3031A	4	E1	255	5.25	133.35	.533	13.50	.053	1.35	
3033A	8	E1	560	6.50	165.10	.654	16.50	.064	1.63	
3068A	12	E1	800	8.50	215.90	.840	21.30	.063	1.60	
3037A	16	E1	1320	10.50	266.70	.974	24.70	.074	1.88	
3039A	24	E1	1620	11.25	285.75	1.200	30.50			

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

300V Power-Limited Tray Cables

16 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Unshielded

Stranded (19 x 29) TC Conductors • PVC Insulation • PVC Jacket									
9410	1	E2	78	2.50	63.50	.254	6.45	0.37	.94
Stranded (7 x 24) BC Conductors • PVC Insulation • PVC Jacket									
1035A	1	E1	71	2.50	63.50	.254	6.45	0.37	.94

16 AWG • Beldfoil® Shielding

Stranded (19 x 29) TC Conductors • PVC Insulation • PVC Jacket									
9316	1	E2	90	2.50	63.50	.256	6.50	0.37	.94

16 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 24) BC Conductors • PVC Insulation • PVC Jacket									
1030A	1	E1	94	2.50	63.50	.257	6.53	.037	.94
3043A	2	E1	83	4.50	114.30	.437	11.10		
1528A	3	E1	250	4.75	120.65	.457	11.61		
1484A	4	E1	330	5.00	127.00	.495	12.57	.053	1.35
1485A	8	E1	616	6.00	152.40	.597	15.16		
1486A	12	E1	892	7.50	190.50	.741	18.80		
3050A	16	E1	661	8.50	215.90	.831	21.10	.064	1.63
1489A	24	E1	1749	10.50	266.70	1.032	26.20	.074	1.88
1490A	36	E1	2606	11.75	298.45	1.178	29.80		
3056A	50	E1	3615	15.50	393.70	1.550	39.37	.088	2.24

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Instrumentation Cable

300V Power-Limited Tray Cables

16 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res

- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Individually Beldfoil® Shielded Pairs and Overall Beldfoil Shield • 22 AWG Orange Communication Wire

Stranded (7 x 24) BC Conductors • PVC Insulation • PVC Jacket									
1492A	2	E1	232	4.50	114.30	.450	11.43	.053	1.35
1493A	4	E1	420	5.00	127.00	.512	13.11	.055	1.40
1494A	8	E1	795	7.00	177.80	.687	17.50	.066	1.68
1495A	12	E1	1170	8.25	209.55	.822	20.73	.074	1.88
3051A	16	E1	661	10.00	254.00	.936	23.77	.084	2.13
1498A	24	E1	2296	11.50	292.10	1.149	29.18	.088	2.24
1499A	36	E1	3167	13.50	342.90	1.334	33.88		
3057A	50	E1	2066	16.00	406.40	1.600	40.64		

16 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res

- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Unshielded

Stranded (19 x 29) TC Conductors • PVC Insulation • PVC Jacket									
9494	1	E1	91	2.75	69.85	.268	6.81	.037	.94
Stranded (7 x 24) BC Conductors • PVC Insulation • PVC Jacket									
1034A	1	E1	107	2.75	69.85	.268	6.81	.037	.94

16 AWG • Beldfoil Shielding

Stranded (19 x 29) TC Conductors • PVC Insulation • PVC Jacket									
9366	1	E1	116	2.75	69.85	.270	6.86	.037	.94

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

300V Power-Limited Tray Cables

16 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Overall Beldfoil® Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 24) BC Conductors • PVC Insulation • PVC Jacket									
1031A	1	E1	130	2.75	69.85	.271	6.88	.037	.94
3044A	2	E1	259	4.75	120.65	.483	12.27	.053	1.35
3046A	4	E1	473	5.75	146.05	.570	14.40	.063	1.60
3048A	8	E1	902	7.50	190.50	.760	19.30	.074	1.88
3052A	16	E1	1758	11.25	285.75	1.032	26.21	.084	2.13
3054A	24	E1	2615	11.75	298.45	1.180	29.90		

16 AWG • Individually Beldfoil Shielded Triads and Overall Beldfoil Shielding • 22 AWG Orange Communication Wire

Stranded (7 x 24) BC Conductors • PVC Insulation • PVC Jacket									
3045A	2	E1	304	5.00	127.00	.506	12.80	.053	1.35
3047A	4	E1	563	6.00	152.40	.569	14.45	.064	1.63
3049A	8	E1	1081	8.00	203.20	.764	19.41	.074	1.88
3069A	12	E1	1500	10.00	254.00	.998	25.35	.084	2.13
3053A	16	E1	2117	11.50	292.10	1.150	29.20		
3055A	24	E1	3153	13.25	336.55	1.320	33.53		

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Instrumentation Cable

300V Power-Limited Tray Cables

14 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CL3R
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

14 AWG • Unshielded

Stranded (42 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9411	1	E2	124	3.25	82.55	.322	8.18	.042	1.07

14 AWG • Beldfoil® Shielding

Stranded (42 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9314	1	E2	140	3.25	82.55	.324	8.23	.042	1.07

14 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CL3R
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

14 AWG • Unshielded

Stranded (42 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9495	1	E1	186	3.50	88.90	.340	8.64	.042	1.07

14 AWG • Beldfoil Shielding

Stranded (42 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9367	1	E1	188	3.50	88.90	.343	8.71	.042	1.07

TC = Tinned Copper • PVC = Polyvinyl Chloride

UL Instrumentation Cable

300V Power-Limited Tray Cables

12 AWG Pairs



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CL3R
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

12 AWG • Unshielded

Stranded (65 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9412	1	E2	197	4.25	107.95	.370	9.40	.042	1.07

12 AWG • Beldfoil® Shielding

Stranded (65 x 30) TC Conductors • PVC Insulation • PVC Jacket									
9312	1	E2	225	4.25	107.95	.373	9.47	.042	1.07

12 AWG Triads



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- NEC: CL3R
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

12 AWG • Unshielded

Stranded (7 x 20) BC Conductors • PVC Insulation • PVC Jacket									
3102A	1	E1	315	3.50	88.90	.432	11.00	0.53	1.35

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Bare	Tinned	Insulation/Jacket	Bare	Tinned	Insulation/Jacket
A	B	PVC/PVC	Q	R	XLP/CPE
C	D	XLP/PVC	S	T	XLP/Haloarrest®

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

Thermocouple Extension Cable and Thermocouple Wire Overview

Construction Thermocouple Extension Cable

Conductor material determined by the thermocouple extension wire type. FEP or PVC insulated with FEP or PVC jacket. Nylon rip cord included in all PVC-jacketed thermocouple extension cables. Communication wire included on all multi-pair, PVC constructions—22 AWG (7 x 30) bare copper orange PVC insulation.

NOTE: The temperature ranges in Table A are applicable only to the thermocouple conductors and not to the cable. The cable must never be exposed to temperatures higher than the maximum temperature ratings shown in Table B.

Table B: Other Insulation/Jacket Options

UL Listed for PLTC	
Insulation/Jacket	Max. Temp Rating
XLP/PVC	90°C
XLP/CPE	90°C
PVC/PVC	105°C
PVC/CPE	105°C
XLP/Halobarrest®	90°C
FEP/FEP	200°C

Application

Unshielded

Parallel non-shielded extension wire may be utilized in low noise environments when recommended by the instrument manufacturer.

Overall Shield

Recommended, except in areas where high voltage and current sources create excessive noise interference. The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness.

Individually Shielded

Individually shielded pairs are recommended for use in applications where optimum noise rejection is required.

PVC Insulated, PVC Jacketed Cable Specifications

- UL Subject 13
- UL 1685 (UL 1581) Vertical Tray Flame Test comparable to IEEE 383-1974 (70,000 BTU) Flame Test
- ANSI/MC 96.1-1982
- NEC CMG
- NEC Type PLTC Listed, which is approved for cable tray use in Class 1, Division 2, hazardous areas and non-hazardous areas, cable trays, raceways, conduit and supported by messenger wires.

- NEC Type ITC Listed, which is approved for cable tray use, raceways hazardous locations according to Articles 501, 502, 503 and 504; or as aerial on a cable messenger, and under raised floors in control rooms and rack rooms where arranged to prevent damage to the cable. Usages are allowed based on qualified persons servicing all installations.
- PVC/PVC constructions are CMG, FT4, IEEE 1202 and IEEE 383-2003 rated, and meet ICEA T-29-520 Flame Test.
- Optional: PLTC-ER/ITC-ER
- UL 1277 TC versions approved for use in Class 1 trays available as special.

Shielded Twisted Pair (FEP insulated, FEP jacketed cable specifications)

- UL Subject 13
- NFPA 262 (UL 910 Steiner Tunnel Flame Test) comparable to FT6 Flame Test
- ANSI/MC 96.1-1982
- NEC Type CL3P/PLTC Listed, which is approved for use in ducts, plenums and other space used for environmental air.
- UL 1277 TC versions approved for use in Class 1 trays available as special.

Thermocouple Wire

Conductor material determined by the thermocouple type. FEP insulated and jacketed flat constructions.

FEP thermocouple wire is impervious to chemical attack and is flame retardant.

Table A: Thermocouple Identification and Limits of Error – Reference Junction 0°C*

ANSI Symbol	Temperature Range (°C) (conductor only)	Limits of Error Standard (°C)	Jacket Color	Insulation Color Code		Conductor Identification	
				Positive (+)	Negative (-)	Positive (+)	Negative (-)
E	0 to 340 340 to 540	±1.7°C ±.50%	Brown	Purple	Red	Chromel® Non-magnetic	Constantan Silver Color
J	0 to 293 293 to 480	±2.2°C ±.75%	Brown	White	Red	Iron Magnetic	Constantan Non-magnetic
K	0 to 293 293 to 980	±2.2°C ±.75%	Brown	Yellow	Red	Chromel Non-magnetic	Alumel® Magnetic
T	0 to 133 133 to 260	±1.0°C ±.75%	Brown	Blue	Red	Copper Copper Color	Constantan Non-magnetic
EX	0 to 200	±1.7°C	Purple	Purple	Red	Chromel	Constantan
JX	0 to 200	±2.2°C	Black	White	Red	Iron	Constantan
KX	0 to 200	±2.2°C	Yellow	Yellow	Red	Chromel	Alumel
TX	0 to 200	±1.0°C	Blue	Blue	Red	Copper	Constantan

Limits of error per ANSI MC96.1-1982. Limits shown do not include system or installation error. Percentages refer to the temperature being measured.

*The Temperature Range and Limits of Error are for standard grade thermocouples, Reference ANSI MC96.1-1982 for special grade thermocouples.


The Temperature Ranges for type E, J, K and T thermocouple wires listed above pertain to 20 AWG wire.

Additional constructions available upon request.

UL Instrumentation Cable

Thermocouple Extension Cable

Extension Cable



- UL PLTC, ITC
- Sunlight Res
- Oil Res
- 105°C
- NEC: CMG
- CEC: CMG FT4
- IEEE 1202/383
- ICEA T-29-520

Part No.	ANSI Type	Pairs	Color Code	Jacket Color	Insulation Thickness		OD (Nom)	
					Inch	mm	Inch	mm

20 AWG Solid Conductors • Overall Beldfoil® Shielding

PVC Insulation • PVC Jacket									
3111A	JX	1	White, Red	Black					
3112A	KX	1	Yellow, Red	Yellow	.016	.41	.206	5.23	
3113A	TX	1	Blue, Red	Blue					

20 AWG Solid Conductors • Individually Beldfoil Shielded Pairs + Overall Beldfoil Shielding

PVC Insulation • PVC Jacket									
3115A	JX	2	White, Red	Black	.016	.41	.332	8.43	
1006A	JX	4	White, Red	Black	.016	.41	.383	9.73	
1012A	KX	4	Yellow, Red	Yellow	.016	.41	.383	9.73	
1013A	KX	8	Yellow, Red	Yellow	.016	.41	.503	12.78	

16 AWG Solid Conductors • Overall Beldfoil Shielding


PVC Insulation • PVC Jacket									
1101A	EX	1	Purple, Red	Purple					
1000A	JX	1	White, Red	Black	.017	.43	.248	6.30	
1018A	KX	1	Yellow, Red	Yellow					
1023A	TX	1	Blue, Red	Blue					

PVC = Polyvinyl Chloride

UL Instrumentation Cable

High-Temperature Thermocouple Extension Cable and Thermocouple Wire

High-Temperature Extension Cable



- UL PLTC
- Sunlight Res
- Oil Res
- 200°C
- NEC: CL3P

Part No.	ANSI Type	Pairs/ Cond.	Color Code	Jacket Color	Insulation Thickness		OD (Nom)	
					Inch	mm	Inch	mm

20 AWG Solid Conductors • Unshielded

FEP Insulation • FEP Jacket								
83932	KX	2c	Yellow, Red	Yellow	.010	.25	.076 x .128	1.93 x 3.25

20 AWG Stranded (7x28) Conductors • Unshielded

FEP Insulation • FEP Jacket								
83930	JX	2c	White, Red	Black	.010	.25	.082 x .149	2.08 x 3.56

20 AWG Stranded (7x28) Conductors • Overall Beldfoil® Shield

FEP Insulation • FEP Jacket								
83955	EX	1 pr	Purple, Red	Purple	.010	.25	.145	3.68
83950	JX	1 pr	White, Red	Black				
83952	KX	1 pr	Yellow, Red	Yellow				
83954	TX	1 pr	Blue, Red	Blue				


16 AWG Solid Conductors • Overall Beldfoil Shield

FEP Insulation • FEP Jacket								
1114A	EX	1 pr	Purple, Red	Purple	.010	.25	.172	4.37
1115A	JX	1 pr	White, Red	Black				
1116A	KX	1 pr	Yellow, Red	Yellow				
1117A	TX	1 pr	Blue, Red	Blue				

16 AWG Stranded (7 x 24) Conductors • Overall Beldfoil Shield

FEP Insulation • FEP Jacket								
83951	JX	1 pr	White, Red	Black	.010	.25	.189	4.80
83953	KX	1pr	Yellow, Red	Yellow	.010	.25	.187	4.75

High-Temperature Thermocouple Wire



- UL PLTC
- Sunlight Res
- Oil Res
- 200°C
- NEC: CL3P

Part No.	ANSI Type	Conductors	Color Code	Jacket Color	Insulation Thickness		OD (Nom)	
					Inch	mm	Inch	mm

20 AWG Solid Conductors • Unshielded

FEP Insulation • FEP Jacket								
83915	E	2	Purple, Red	Brown	.010	.25	.076 x .128	1.93 x 3.25
83900	J	2	White, Red	Brown				
83905	K	2	Yellow, Red	Brown				
83910	T	2	Blue, Red	Brown				

FEP = Fluorinated Ethylene Propylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

600V Tray Cables Overview

Construction

Soft annealed bare or tinned copper conductors. PVC insulated with a nylon overcoat, 90°C PVC Jacket, TFN, TFFN or THHN style singles. Nylon rip cord included in all PVC-Nylon/PVC instrumentation cables.

Application

These cables are suitable for installation in wet or dry locations. Cable jackets are resistant to sunlight, moisture and vapor penetration. The cables can be used in raceways, and (supported by messenger wire), outdoor applications and direct burial applications.

Unshielded

Twisted non-shielded instrument pairs provide a minimal OD allowing greater tray and conduit fill. Non-shielded instrument pairs may be utilized when recommended by the instrument manufacturer and used in a metallic conduit.

Overall Shield

Recommended for use in instrumentation applications where signals are transmitted in excess of 100 millivolts except in areas where high voltage and current sources creates excessive noise interference.

The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness. Copper tape shield available upon request.

Individually Shielded and Overall Shielded

Individually shielded pairs or triads with an overall shield are recommended for use in instrumentation applications where optimum noise rejection is required. Individual pair/triad shields are fully isolated from each other and contain a separate drain wire for grounding to provide maximum protection from crosstalk and common mode interference. Cables with an overall shield provide additional electrostatic noise protection.

Tray Cable Construction Options

Insulation/Jacket	UL Listed for MC and TC			
	Max. Temp Rating		Flame Tests	Ratings*
	Wet	Dry		
PVC-Nylon/PVC (THHN or THWN) 14 AWG & larger	75°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-61-402
PVC-Nylon/PVC (TFN or TFFN) 16 & 18 AWG	75°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-61-402
XLP/PVC or CPE (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-66-524
XLP/PVC or CPE (RFH-2) 16 & 18 AWG	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-82-552
XLP/Haloarrest® (Thermoplastic) (XHHW-2) 14 AWG & larger (RFH-2) 16 & 18 AWG	90°C	90°C	UL 1685	TC-LS
XLP/HaloarrestXLink™-1 and -2 (Thermoset) (XHHW-2) 14 AWG & larger (RFH-2) 16 & 18 AWG	90°C	90°C	UL 1685 ICEA T-29-520 FT4/IEEE 1202/383	TC-ER ICEA S-73-532 T-33-655

CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-linked Poly
*Applicable to TC-rated cables only.

UL Instrumentation Cable *(continued)*

600V Tray Cables Overview

Specifications

- UL Subject 1277 TC
- UL 1685 (UL 1581) Vertical Tray Flame
- NEC Type TC Listed, which is approved for cable tray use in Class 1, Division 2 areas, per NEC Articles 340, 318 and 501 and for Class 1 circuits as permitted in Article 725
- PVC-nylon/PVC constructions are NEC Type NPLF Listed, which is approved for use in Non Power-Limited Fire Protective Signaling circuits, per NEC Article 760
- PVC-Nylon/PVC, XLP/PVC and XLP/CPE constructed cables meet IEEE 1202/IEEE 383-2003/FT4 (70,000 BTU) Flame Test
- XLP/Haloarrest® (thermoplastic) cables are UL 1277 TC-LS rated
- XLP/HaloarrestXLink™-1 and -2 are TC-ER rated

TC-ER Rated Cables

Belden offers all PVC-nylon/ PVC, XLP/PVC and XLP/CPE jacketed tray cables with a TC-ER (Exposed Run) rating.

Per NEC Article 336, a TC-ER rated cable may be installed in an industrial establishment between a cable tray and the utilization equipment or device. A TC-ER rated cable must meet the crush and impact requirements of UL Type MC cable. By eliminating the need for metal conduit and/or armor, using a TC-ER rated cable results in savings in both installation and maintenance.

MC Cable Ratings Optional

Customize any 600V TC instrumentation cable with armor and a full-sized ground. See chart below to specify.

To Specify Conductor, Insulation and Jacket Options:

1234	A	E
Start with Base Part No.	Add or replace letter code for desired Conductor, Insulation, and Jacket	Add for Exposed Run Rating if required

Conductor		Insulation/Jacket
Bare	Tinned	
A	B	PVC-Nylon/PVC
C	D	XLP/PVC
G	H	XLP/TPE
Q	R	XLP/CPE
S	T	XLP/Haloarrest
U	V	XLP/HaloarrestXLink-1
W	X	XLP/HaloarrestXLink-2
Y	Z	XLP/HaloarrestXLink-2, Marine Approved

Code		
Overall Jacket Prefix	Armor Prefix	Base Part No.
1	2	4-digit base number

Overall Jacket

Code	Material
1	PVC
3	CPE
4	TPE
5	HDPE
7	Haloarrest® (Thermoplastic LSZH)

Armor

Code	Material
2	Aluminum Interlock
3	Steel Interlock
4	Aluminum Belclad®
5	Steel Belclad
6	Copper Belclad
8	Continuous Armor

Example: 121049A is part number 1049A with PVC outer jacket and aluminum interlock armor.

CPE = Chlorinated Polyethylene • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly

UL Instrumentation Cable

600V Tray Cables

18 AWG Pairs



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

18 AWG • Unshielded

Stranded (19 x 30) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9486	1	E2	50	2.75	69.85	.275	6.99	.048	1.22

18 AWG • Overall Beldfoil® Shielding

Stranded (19 x 30) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9341	1	E2	63	2.75	69.85	.276	7.01	.048	1.22

18 AWG • Overall Beldfoil Shielding

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
1120A	1	E2	59	2.80	71.12	.278	7.06	.048	1.22
3088A	1	E1	67	2.80	71.12	.278	7.06		
1063A	2	E1	112	4.10	104.14	.407	10.34	.053	1.35
1064A	4	E1	202	4.70	119.38	.470	11.94		
1065A	8	E1	381	6.00	152.40	.599	15.21	.064	1.63
1066A	12	E1	560	7.20	182.88	.717	18.21		
1067A	16	E1	739	8.00	203.20	.793	20.14	.084	2.13
1068A	24	E1	1098	10.30	261.62	1.017	25.83		
1087A	36	E1	1635	11.70	297.18	1.178	29.97	.084	2.13
1088A	50	E1	2262	14.50	368.30	1.446	36.73		

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable *(continued)*

600V Tray Cables

18 AWG Pairs



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Pairs	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	Inch	mm	Inch	mm	Inch	mm

18 AWG • Individually Beldfoil® Shielded Pairs + Overall Beldfoil Shielding

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
1048A	2	E1	140	3.80	96.52	.381	9.68	.048	1.22
1049A	4	E1	258	4.90	124.46	.489	12.42	.053	1.35
1050A	8	E1	350	6.60	167.64	.654	16.61	.064	1.63
1051A	12	E1	728	7.90	200.66	.785	19.94	.084	2.13
1052A	16	E1	963	9.00	228.60	.898	22.81	.084	2.13
1053A	24	E1	1434	11.10	281.94	1.115	28.32	.084	2.13
1054A	36	E1	2139	13.00	330.20	1.299	32.99	.084	2.13
1038A	50	E1	2962	15.30	388.62	1.527	38.79	.084	2.13

18 AWG • Overall Beldfoil Shielding • Exposed Run • Green Insulated Ground Wire

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3088AE	1	E1	80	3.40	86.36	.340	8.64	.048	1.22

Stranded (7 x 26) BC Conductors • Cross-Linked Poly Insulation • PVC Jacket									
3088CE	1	E1	63	2.75	69.85	.276	7.01	.048	1.22

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • CPE = Chlorinated Polyethylene • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

600V Tray Cables

18 AWG Triads



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Triads	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm	

18 AWG • Overall Beldfoil® Shielding

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
1121A	1	E2	81	2.90	73.66	.290	7.36	.047	1.22
3089A	1	E1	90	2.75	89.85	.282	7.16	.048	1.22

18 AWG • Individually Beldfoil Shielded Triads + Overall Beldfoil Shielding

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3064A	2	E1	185	4.75	120.65	.493	12.52	.048	1.22
1093A	4	E1	347	6.00	152.40	.577	14.66	.063	1.60
1094A	8	E1	672	7.50	190.50	.745	18.92		
1095A	12	E1	997	9.75	247.65	.944	23.98		
1096A	24	E1	1971	13.00	330.20	1.284	32.61	.084	2.13

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Instrumentation Cable

600V Tray Cables

16 AWG Pairs



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Unshielded

Stranded (19 x 29) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9487	1	E2	70	3.00	76.20	.295	7.49	.048	1.22

16 AWG • Overall Beldfoil® Shielding

Stranded (19 x 29) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9342	1	E2	105	3.00	76.20	.296	7.52	.048	1.22

16 AWG • Overall Beldfoil Shielding

Stranded (7 x 24) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
1118A	1	E2	105	3.00	76.20	.294	7.47		
3090A	1	E1	105	3.00	76.20	.295	7.49	.047	1.19
1069A	2	E1	179	4.60	116.84	.456	11.58		
1527A	3	E1	241	4.80	121.92	.482	12.24		
1070A	4	E1	321	5.60	142.24	.560	14.22		
1071A	8	E1	607	6.80	172.72	.676	17.17	.063	1.60
1072A	12	E1	893	8.10	205.74	.812	20.63		
1073A	16	E1	1178	9.30	236.22	.946	24.03		
1074A	24	E1	1749	11.60	294.64	1.158	29.41	.085	2.16
1089A	36	E1	2606	13.20	335.28	1.321	33.55		
1090A	50	E1	3606	15.50	393.70	1.551	39.40		

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable *(continued)*

600V Tray Cables

16 AWG Pairs



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Individually Beldfoil® Shielded Pairs + Overall Beldfoil Shielding

Stranded (7 x 24) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
1055A	2	E1	223	4.16	105.66	.476	12.09	.047	1.19
1037A	3	E1	290	5.00	127.0	.504	12.80		
1039A	4	E1	411	5.80	147.32	.584	14.83		
1040A	6	E1	428	6.80	172.72	.682	17.32		
1041A	8	E1	786	7.40	187.96	.738	18.75		
1042A	12	E1	1161	9.40	238.76	.935	23.75		
1043A	16	E1	1537	10.40	264.16	1.035	26.29	.085	2.16
1044A	20	E1	1912	11.50	292.10	1.146	29.11		
1045A	24	E1	2287	12.70	322.58	1.272	32.31		
1046A	36	E1	3413	14.50	368.30	1.454	36.93		
1047A	50	E1	4726	17.80	452.12	1.781	45.24		

16 AWG • Overall Beldfoil Shielding • Exposed Run • Green Insulated Ground Wire

Stranded (7 x 24) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3090AE	1	E1	130	3.90	99.06	.390	9.91	.048	1.22
Stranded (7 x 24) BC Conductors • Cross-Linked Poly Insulation • PVC Jacket									
3090CE	1	E1	130	3.90	99.06	.390	9.91	.048	1.22

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer * XLP = Cross-Linked Poly



UL Instrumentation Cable

600V Tray Cables

16 AWG Triads



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Triads	Color Code	Pull Tension (Max)		Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm	

16 AWG • Overall Beldfoil® Shielding

Stranded (7 x 24) BC Conductors • PVC/Nylon Insulation • PVC Jacket										
1119A	1	E2	129	3.10	78.74	.310	7.87	.047	1.19	
3091A	1	E1								

16 AWG • Individually Beldfoil Shielded Triads + Overall Beldfoil Shielding

Stranded (7 x 24) BC Conductors • PVC/Nylon Insulation • PVC Jacket										
1097A	4	E1	554	6.40	162.56	.640	16.26	.063	1.60	
1098A	8	E1	1072	8.70	220.98	.872	22.15	.085	2.16	
1099A	12	E1	1590	10.50	266.70	1.047	26.59	.085	2.16	
3118A	16	E1	1771	12.25	311.15	1.234	31.34	.084	2.13	
1100A	24	E1	3144	14.30	363.22	1.434	36.42	.085	2.16	
3130A	36	E1	3600	18.00	457.20	1.773	45.03	.110	2.79	

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable *(continued)*

600V Tray Cables

14 AWG Pairs



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

14 AWG • Unshielded

Stranded (42 x 30) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9488	1	E2	107	3.75	95.25	.359	9.12	.048	1.22

14 AWG • Overall Beldfoil® Shield

Stranded (42 x 30) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9343	1	E2	160	3.75	95.25	3.58	9.09	.048	1.22

14 AWG • Overall Beldfoil Shield

Stranded (7 x 22) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3080A	1	E2	160	3.50	88.90	.342	8.69	.048	1.22

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Instrumentation Cable

600V Tray Cables

14 AWG Triads



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Triads	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

14 AWG • Overall Beldfoil® Shielding

Stranded (7 x 22) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3081A	1	E2	200	3.50	88.90	.361	9.17	.048	1.22

12 AWG Pairs



- UL TC
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Pairs	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

12 AWG • Unshielded

Stranded (37 x 27) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9489	1	E2	179	3.75	95.25	.380	9.65	0.45	1.14

12 AWG • Overall Beldfoil Shield

Stranded (37 x 27) TC Conductors • PVC/Nylon Insulation • PVC Jacket									
9344	1	E2	253	3.75	95.25	.384	9.75	.045	1.14

12 AWG • Overall Beldfoil Shield

Stranded (7 x 20) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3103A	1	E1	253	3.80	96.52	.380	9.65	.048	1.22

12 AWG • Overall Beldfoil Shielding

Stranded (7 x 20) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
3081A	1	E1	315	4.00	101.60	.401	10.19	.048	1.22

To Specify Conductor, Insulation and Jacket Options:		
1234	A	E
Start with Base Part No. (1000 and 3000 Series Cables Only)	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add for Exposed Run Rating

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • TC = Tinned Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Control Cable

600V Type TC Cables Overview

Introduction

Belden offers a wide selection of UL-rated 600V Tray Cable for a variety of control applications.

Multi-conductor versions are available as standards from 18 to 4/0 AWG.

These are unshielded and shielded versions that come with various insulation and jacket combinations.

These TC cables are installed in cable trays, ducts and conduit and can be used in direct burial applications. They are extensively used in manufacturing facilities, especially in the process industries such as petrochemical, steel, pulp and paper, cement and mining.

These flexible, space efficient cables can be substantially more economical than traditional wiring methods.

Construction

Soft annealed bare or tinned copper conductors, with various insulation and jacketing options as seen in chart below.

Application

These cables are suitable for installation in wet or dry locations. Cable jackets are resistant to sunlight, moisture and vapor penetration. The cables can be used in raceways (supported by messenger wire), outdoor applications and direct burial applications.

Unshielded

Cabled non-shielded conductors provide a minimal O.D. allowing greater tray and conduit fill. Non-shielded control cable may be utilized when recommended by the equipment manufacturer and used in a metallic conduit.

Overall Shield

Recommended for use in control applications where signals are transmitted in excess of 100 millivolts, except in areas where high voltage and current sources create excessive noise interference. The Beldfoil® shield with drain wire provides 100% coverage for maximum shield effectiveness. Copper tape shield available upon request.

Only 2-conductor round constructions can be shielded. Flat constructions cannot be shielded.

Tray Cable Construction Options

Insulation/Jacket	UL Listed for MC and TC			
	Max. Temp Rating		Flame Tests	Ratings*
	Wet	Dry		
PVC-Nylon/PVC (THHN or THWN) 14 AWG & larger	75°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-61-402
PVC-Nylon/PVC (TFN or TFFN) 16 & 18 AWG	75°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520	ICEA S-73-532 ICEA S-61-402
XLP/PVC or CPE (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-66-524
XLP/PVC or CPE (RFH-2) 16 & 18 AWG	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles ICEA T-29-520	ICEA S-73-532 ICEA S-82-552
XLP/Haloarrest® (Thermoplastic) (XHHW-2) 14 AWG & larger (RFH-2) 16 & 18 AWG	90°C	90°C	UL 1685	TC-LS
XLP/HaloarrestXLink™-1 and -2 (Thermoset) (XHHW-2) 14 AWG & larger (RFH-2) 16 & 18 AWG	90°C	90°C	UL 1685 ICEA T-29-520 FT4/IEEE 1202/383	TC-ER ICEA S-73-532 T-33-655

CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • XLP = Cross-linked Poly

*Applicable to TC-rated cables only.

Ground Wire

- Non-insulated, bare copper ground wires are included for constructions 8 through 4/0 AWG. Non-insulated, bare copper, full sized ground wires may be requested on other constructions.
- All shielded PVC-Nylon/PVC constructions, over three conductors, include full sized ground (drain) wires.

Color Code

Multi-conductor control cables (10 AWG to 18 AWG) are printed alpha-numerically in addition to being color coded per ICEA Table E2.

8 AWG and larger are black and numbered per ICEA Method 4.

Refer to Technical Information Section for ICEA color code charts.

Specifications

- UL Subject 1277 Type TC and TC-ER
- XLP/Haloarrest (thermoplastic) jacketed cables are UL 1277 TC-LS rated
- XLP/HaloarrestXLink™-1 and -2 are TC-ER rated
- UL Subject 1424 (per outline for NPLF requirements dated May 3, 1979)
- UL 1685 (UL 1581) Vertical Flame Test

- Approved for cable tray use in Class 1, Division 2 areas, per NEC Articles 340, 318 and 501, and for Class 1 circuits as permitted in Article 725
- PVC-Nylon/PVC, XLP/PVC and XLP/CPE constructed cables meet IEEE 1202/IEEE 383-2003/FT4 (70,000 BTU/hr) Flame Test

TC-ER Rated Cables


Belden offers all PVC-nylon/ PVC, XLP/PVC and XLP/CPE jacketed tray cables with a TC-ER (Exposed Run) rating, formerly referred to as Open Wiring.

Per NEC Article 336, a TC-ER rated cable may be installed in an industrial establishment between a cable tray and the utilization equipment or device. A TC-ER rated cable must meet the crush and impact requirements of UL Type MC cable. By eliminating the need for metal conduit and/or armor, using a TC-ER rated cable results in savings in both installation and maintenance.

Standard lengths may be subject to tolerance. Custom lengths may be available upon request. Contact the Belden Electronics Division Customer Service Department for additional information. 1-800-BELDEN-1.

UL Control Cable

600V Type TC Cables



- UL TC-ER
- UL TC (2-Conductor Cables)
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

18 AWG • Unshielded

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27916A	2	E2	44	2.7	68.58	.180 x .266	4.57 x 6.76		
27325A	2	E2	44	2.7	68.58	.270	6.86		
28334A	3	E2	66	2.8	71.12	.280	7.11		
28326A	4	E2	88	3.1	78.74	.310	7.87		
28335A	5	E2	110	3.3	83.82	.330	8.38	.045	1.14
28600A	6	E2	132	3.5	88.90	.350	8.89		
28327A	7	E2	154	3.5	88.90	.350	8.89		
28601A	8	E2	176	3.8	96.52	.390	9.83		
28336A	9	E2	198	4.1	104.14	.410	10.41		
28328A	10	E2	220	4.5	114.30	.450	11.43		
28602A	11	E2	242	4.5	114.30	.450	11.43		
28329A	12	E2	264	4.5	114.30	.450	11.43		
28603A	13	E2	286	4.7	119.38	.470	11.94		
28604A	14	E2	308	4.8	121.92	.480	12.19		
28605A	15	E2	330	5.1	129.54	.510	12.95		
28606A	16	E2	352	5.0	127.00	.500	12.70	.060	1.52
28607A	17	E2	374	5.7	144.78	.570	14.48		
28608A	18	E2	396	5.7	144.78	.570	14.48		
28609A	19	E2	418	5.7	144.78	.570	14.48		
28610A	20	E2	440	5.9	149.86	.600	15.24		
28611A	25	E2	550	6.6	167.64	.660	16.76		
28612A	30	E2	660	6.6	167.64	.690	17.53		
28613A	37	E2	814	7.4	187.96	.740	18.80		
28614A	50	E2	1100	9.1	231.14	.910	23.11	.080	2.03
28632A	60	E2	1320	9.6	243.84	.960	24.38		

18 AWG • Overall Beldfoil® Shield

Stranded (7 x 26) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27325AS	2	E2	67	2.70	68.58	.270	6.86		
28334AS	3	E2	90	2.80	71.12	.280	7.11	.045	1.14
28326AS	4	E2	112	3.10	81.28	.300	7.62		

To Specify Conductor, Insulation and Jacket Options:		
12345	A	S
Start with Base Part No.	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add "S" for Optional Beldfoil® Shield

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved


BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Control Cable

600V Type TC Cables



- UL TC-ER
- UL TC (2-Conductor Cables)
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

16 AWG • Unshielded

Stranded (7 x 24) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27917A	2	E2	70	2.9	73.66	.190 x .290	4.83 x 7.37		
27337A	2	E2	70	2.9	73.66	.299	7.60		
28331A	3	E2	105	3.1	78.74	.307	7.80		
28338A	4	E2	140	3.3	83.82	.332	8.18		
28339A	5	E2	175	3.6	91.44	.360	9.14		
28615A	6	E2	210	3.9	99.06	.390	9.91		
28323A	7	E2	245	3.9	99.06	.390	9.91		
28616A	8	E2	280	4.2	106.68	.420	10.67	.045	1.14
28340A	9	E2	315	4.5	114.30	.450	11.43		
28617A	10	E2	350	4.9	124.46	.490	12.45		
28618A	11	E2	385	4.9	124.46	.490	12.45		
28341A	12	E2	420	5.0	127.00	.500	12.70		
28619A	13	E2	455	5.7	144.78	.570	14.48		
28620A	14	E2	490	5.7	144.78	.570	14.48		
28621A	15	E2	525	5.9	149.86	.590	14.99	.060	1.52
28330A	16	E2	560	6.0	152.40	.600	15.24	.045	1.14
28622A	17	E2	595	6.3	160.02	.630	16.00		
28623A	18	E2	630	6.3	160.02	.630	16.00	.060	1.52
28624A	19	E2	665	6.3	160.02	.630	16.00		
28625A	20	E2	700	6.6	167.64	.660	16.76		
28324A	25	E2	875	7.3	185.42	.730	18.54		
28626A	30	E2	1050	7.7	195.58	.770	19.56		
28627A	37	E2	1295	8.3	210.82	.830	21.08	.080	2.03
28628A	50	E2	1750	10.0	254.00	1.000	25.40		
28633A	60	E2	2100	11.0	279.40	1.100	27.94		

16 AWG • Overall Beldfoil® Shielding

Stranded (7 x 24) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27337AS	2	E2	94	3.00	76.20	.302	7.67	.045	1.14
28331AS	3	E2	130	3.20	81.28	.320	8.13		

14 AWG • Unshielded


Stranded (7 x 22) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27080A	2	E2	108	3.5	88.90	.210 x .320	5.33 x 8.13		
27636A	2	E2	108	3.2	81.28	.320	8.13	.045	1.14
28081A	3	E2	162	3.4	86.36	.340	8.64		

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



UL Control Cable

600V Type TC Cables



- UL TC-ER
- UL TC (2-Conductor Cables)
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

14 AWG • Unshielded *(continued)*

Stranded (7 x 22) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28082A	4	E2	216	3.6	91.44	.360	9.14		
28083A	5	E2	270	3.9	99.06	.400	10.16		
28084A	6	E2	324	4.3	109.22	.434	11.02		
28085A	7	E2	378	4.3	109.22	.433	11.00	.045	1.14
28086A	8	E2	432	4.7	119.38	.480	12.19		
28087A	9	E2	486	5.1	129.54	.510	12.95		
28088A	10	E2	540	5.7	144.78	.588	14.94		
28089A	11	E2	594	5.9	149.86	.595	15.11		
28090A	12	E2	648	5.9	149.86	.595	15.11		
28091A	13	E2	702	6.3	160.02	.640	16.26		
28092A	14	E2	756	6.3	160.02	.640	16.26		
28093A	15	E2	810	6.7	170.18	.670	17.02		
28094A	16	E2	864	6.6	167.64	.671	17.04		
28095A	17	E2	918	7.0	177.80	.700	17.78		
28096A	18	E2	972	7.0	177.80	.700	17.78	.060	1.52
28097A	19	E2	1026	7.0	177.80	.705	17.91		
28098A	20	E2	1080	7.4	187.96	.735	18.67		
28099A	21	E2	1134	7.4	187.96	.740	18.80		
28100A	22	E2	1188	7.6	193.04	.760	19.30		
28101A	23	E2	1242	7.6	193.04	.760	19.30		
28102A	24	E2	1296	8.1	205.74	.810	20.57		
28103A	25	E2	1350	8.1	205.74	.810	20.57		
28104A	26	E2	1404	8.1	205.74	.810	20.57		
28105A	27	E2	1458	8.7	220.98	.870	22.10		
28106A	28	E2	1512	9.1	231.14	.910	23.11		
28107A	29	E2	1566	9.1	231.14	.910	23.11		
28108A	30	E2	1620	9.0	228.60	.902	22.91	.080	2.03
28629A	37	E2	1998	9.7	246.38	.975	24.77		
28912A	50	E2	2700	11.3	287.02	1.138	28.91		



- UL TC-ER
- UL TC (2-Conductor Cables)
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

14 AWG • Overall Beldfoil® Shielding

Stranded (7 x 22) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28081AS	3	E2	99	3.4	86.36	.340	8.64		
28082AS	4	E2	273	3.9	99.06	.391	9.93	.045	1.14


BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Control Cable

600V Type TC Cables



- UL TC-ER
- UL TC (2-Conductor Cables)
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

12 AWG • Unshielded

Stranded (7 x 20) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27109A	2	E2	172	3.5	88.90	.220 x .350	5.59 x 8.89		
27641A	2	E2	172	3.6	91.44	.360	9.14		
28110A	3	E2	258	3.7	93.98	.374	9.50		
28111A	4	E2	344	4.1	104.14	.410	10.41	.045	1.14
28112A	5	E2	430	4.5	114.30	.450	11.43		
28113A	6	E2	516	4.8	121.92	.480	12.19		
28114A	7	E2	602	4.8	121.92	.480	12.19		
28115A	8	E2	688	5.6	142.24	.560	14.22		
28116A	9	E2	774	6.0	152.40	.600	15.24		
28117A	10	E2	860	6.6	167.64	.660	16.76		
28118A	11	E2	946	6.7	170.18	.670	17.02		
28119A	12	E2	1032	6.7	170.18	.670	17.02		
28120A	13	E2	1118	7.0	177.80	.700	17.78	.060	1.52
28121A	14	E2	1204	7.0	177.80	.700	17.78		
28122A	15	E2	1290	7.4	187.96	.740	18.80		
28123A	16	E2	1376	7.5	190.50	.750	19.05		
28124A	17	E2	1462	7.7	195.58	.770	19.56		
28125A	18	E2	1548	7.7	195.58	.770	19.56		
28126A	19	E2	1634	7.9	200.66	.790	20.07		
28127A	20	E2	1720	8.7	220.98	.870	22.10		
28128A	21	E2	1806	8.7	220.98	.870	22.10		
28129A	22	E2	1892	8.9	226.06	.890	22.61		
28130A	23	E2	1978	8.9	226.06	.890	22.61		
28131A	24	E2	2064	9.4	238.76	.940	23.88		
28132A	25	E2	2150	9.6	243.84	.960	24.38		
28133A	26	E2	2236	9.6	243.84	.960	24.38	.080	2.03
28134A	27	E2	2322	9.6	243.84	.960	24.38		
28135A	28	E2	2408	9.9	251.46	.990	25.15		
28136A	29	E2	2494	9.9	251.46	.990	25.15		
28137A	30	E2	2580	10.2	259.08	1.020	25.91		
28630A	37	E2	3182	10.9	276.86	1.090	27.69		
28634A	50	E2	4300	13.0	330.20	1.300	33.02		

To Specify Conductor, Insulation and Jacket Options:		
12345	A	S
Start with Base Part No.	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add "S" for Optional Beldfoil® Shield


Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLInk™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLInk-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLInk-2, Marine Approved

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



UL Control Cable

600V Type TC Cables



- UL TC-ER
- UL TC (2-Conductor 10 AWG Cables)
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

10 AWG • Unshielded

Stranded (7 x 18) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
27138A	2	E2	296	4.2	106.68	.260 x .420	6.60 x 10.67		
27643A	2	E2	296	4.2	106.68	.420	10.67		
28139A	3	E2	444	4.5	114.30	.450	11.43	.045	1.14
28140A	4	E2	592	4.9	124.46	.490	12.45		
28141A	5	E2	740	5.7	144.78	.570	14.48		
28142A	6	E2	888	6.2	157.48	.620	15.75		
28143A	7	E2	1036	6.2	157.48	.620	15.75		
28144A	8	E2	1184	6.8	172.72	.680	17.27	.060	1.52
28145A	9	E2	1332	7.2	182.88	.720	18.29		
28146A	10	E2	1480	7.9	200.66	.790	20.07		
28147A	11	E2	1628	7.9	200.66	.790	20.07		
28148A	12	E2	1776	8.2	208.28	.820	20.83	.080	2.03

8 AWG • Unshielded • 10 AWG Uninsulated Ground Wire

Stranded (7 x 16) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28149A	2	M4	384	5.6	142.24	.560	14.22		
28150A	3	M4	576	5.9	149.86	.590	14.99	.060	1.52
28151A	4	M4	768	6.5	165.10	.650	16.51		

6 AWG • Unshielded • 8 AWG Uninsulated Ground Wire

Stranded (7 x 14) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28152A	2	M4	610	6.3	160.02	.630	16.00		
28153A	3	M4	915	6.7	170.18	.670	17.02	.060	1.52
28154A	4	M4	1220	7.3	185.42	.730	18.54		

To Specify Conductor, Insulation and Jacket Options:		
12345	A	S
Start with Base Part No.	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add "S" for Optional Beldfoil® Shield


Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLink™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLink-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLink-2, Marine Approved

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Control Cable *(continued)*
600V Type TC Cables



- UL TC-ER
- UL Sunlight Res
- Oil Res
- Direct Burial
- NEC: NPLF
- ICEA S-73-532, S-61-402, T-29-520
- FT4
- IEEE 1202/383

Part No.	Conductors	Color Code	Pull Tension (Max)	Bend Radius (Min)		OD (Nom)		Jacket Thickness	
			Lbs	Inch	mm	Inch	mm	Inch	mm

4 AWG • Unshielded • 8 AWG Uninsulated Ground Wire

Stranded (7 x 12) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28155A	2	M4	970	7.7	195.58	.770	19.56	.060	1.52
28156A	3	M4	1455	8.2	208.28	.820	20.83		
28157A	4	M4	1940	9.5	241.30	.950	24.13	.080	2.03

2 AWG • Unshielded • 6 AWG Uninsulated Ground Wire

Stranded (7 x 10) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28158A	2	M4	1544	9.7	246.38	.970	24.64		
28159A	3	M4	2316	9.9	251.46	.990	25.15	.080	2.03
28160A	4	M4	3088	10.9	276.86	1.090	27.69		

1 AWG • Unshielded • 6 AWG Uninsulated Ground Wire

Stranded (19 x 14) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28161A	2	M4	2919	11.2	284.48	1.120	28.45	.080	2.03

1/0 AWG • Unshielded • 6 AWG Uninsulated Ground Wire

Stranded (19 x 12) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28167A	2	M4	1690	11.4	289.56	1.13	28.70	.080	2.03
28168A	3	M4	2535	12.1	307.34	1.21	30.73		
28169A	4	M4	3380	13.4	340.36	1.33	33.78	.083	2.11

2/0 AWG • Unshielded • 6 AWG Uninsulated Ground Wire

Stranded (19 x 11) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28170A	2	M4	2130	12.2	309.88	1.22	30.99		
28171A	3	M4	3195	13.0	330.20	1.30	33.02	.083	2.11
28172A	4	M4	4260	14.4	365.76	1.44	36.58		

3/0 AWG • Unshielded • 6 AWG Uninsulated Ground Wire

Stranded (19 x 10) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28173A	2	M4	2686	13.1	332.74	1.31	33.27		
28174A	3	M4	4029	14.2	360.68	1.42	36.07	.083	2.11
28175A	4	M4	5372	15.6	396.24	1.56	39.62		

4/0 AWG • Unshielded • 6 AWG Uninsulated Ground Wire

Stranded (19 x 9.5) BC Conductors • PVC/Nylon Insulation • PVC Jacket									
28176A	2	M4	3386	14.2	360.68	1.42	36.07		
28177A	3	M4	5078	15.4	391.16	1.54	39.12	.083	2.11
28178A	4	M4	6771	17.7	449.58	1.77	44.96	.116	2.95

To Specify Conductor, Insulation and Jacket Options:		
12345	A	S
Start with Base Part No.	Add or Modify for Conductor, Insulation, and Jacket. See table at right.	Add "S" for Optional Beldfoil® Shield

Conductor		Insulation/Jacket	Conductor		Insulation/Jacket
Bare	Tinned		Bare	Tinned	
A	B	PVC-Nylon/PVC	S	T	XLP/Haloarrest®
C	D	XLP/PVC	U	V	XLP/HaloarrestXLInk™-1
G	H	XLP/TPE	W	X	XLP/HaloarrestXLInk-2
Q	R	XLP/CPE	Y	Z	XLP/HaloarrestXLInk-2, Marine Approved


BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride • TPE = Thermoplastic Elastomer • XLP = Cross-Linked Poly




UL Control Cable

600V Type MC Metal Clad and Teck-Style® Cables
Overview

Metal Clad

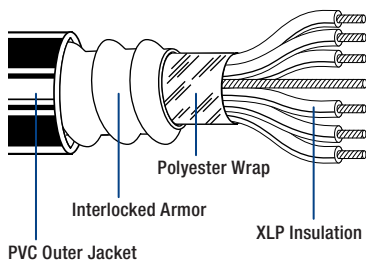

Teck-Style

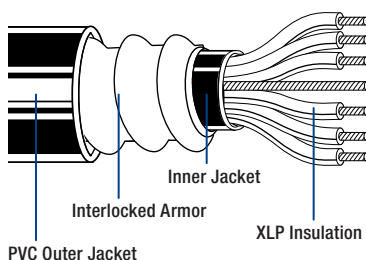

Introduction

Belden® Metal Clad (MC) and Teck-Style cables are designed to meet demanding industrial needs by combining rugged durability and corrosion resistance with flexibility and easy handling.

MC and Teck-Style cables are available in a wide range of constructions for installation in demanding industrial environments including oil and gas, mining, utility, chemical, pulp and paper, and others. They are ideal for use in wet or dry areas, ventilated or non-ventilated, ladder-type cable troughs and flexible cableways. Custom cables are available to meet exacting requirements.

Belden Type MC Cable is sunlight-resistant and appropriate for outdoor use, installation in cable trays, and direct burial.

Teck-Style cables are price-competitive, high-performance, UL and CSA dual-rated cables with a flame-retardant XHHW insulated conductor and an inner PVC jacket for mechanical moisture and corrosion protection.

Construction

Class B stranded bare copper conductors, XLP insulation, bare copper ground wire, standard aluminum or optional galvanized steel interlocking armor, PVC outer jacket.

- Thermoset insulation – XHHW-2 conductors
- NEC conductor temperature 90°C dry and 90°C wet

Voltage Rating

14 AWG – 2 AWG: 600 Volt

Application

Type MC Cable is a general-purpose cable used in the pulp and paper, mining, petroleum and chemical industries as well as in commercial buildings.

MC Cable may be used under the following conditions:

- Exposed or concealed wiring in dry or wet conditions
- In ventilated, non-ventilated or ladder-type cable trays in dry or wet conditions
- On walls or beams
- Directly buried
- Class I and II Div. 2 and Class III Div. 1 and 2 hazardous locations

Minimum Bending Radius

12 times the overall cable diameter

Pulling Tensions

The combined use of Kellems grips and pulling eyes is recommended.

Design Advantages

Insulation Properties

- High tensile strength
- Impact- and crush-resistant
- Heat-resistant
- Excellent elongation
- Moisture-resistant
- Good low temperature properties
- 90°C dry and 90°C wet

Electrical Properties

- High insulation resistance
- Low dielectric loss
- High dielectric strength

Other Features

- Corrosion-resistant
- Versatile and flexible
- Provides cost savings as conduit and ducts are not required

Specifications

- UL 44
- UL 1569
- UL 1685 (UL 1581) Vertical Tray Flame Test (70,000 BTU/hr)


Teck-Style CSA Specifications

- CSA C22.2 No. 131
- FT4 Flame Test
- HAZ LOC
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas

UL Control Cable

600V Type MC Metal Clad Cables

Interlocked Armor



- UL MC
- UL Sun Res
- Oil Res
- Direct Burial

Part No.		Conductors	Color Code	Armor OD		OD (Nom)		Bend Radius (Min)		Insulation Thickness		Jacket Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm

Stranded (7 x 22) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

14 AWG • 14 AWG Uninsulated Ground Wire

Part No.	Part No.	Conductors	Color Code	Armor OD (Inch)	Armor OD (mm)	OD (Nom) (Inch)	OD (Nom) (mm)	Bend Radius (Min) (Inch)	Bend Radius (Min) (mm)	Insulation Thickness (Inch)	Insulation Thickness (mm)	Jacket Thickness (Inch)	Jacket Thickness (mm)
27243	28243	2	E2	.48	12.19	.58	14.73	7.3	185				
27244	28244	3	E2	.50	12.70	.61	15.49	7.6	193				
27245	28245	4	E2	.54	13.72	.64	16.26	7.9	200				
27246	28246	5	E2	.57	14.48	.68	17.27	8.4	213				
27247	28247	6	E2	.62	15.75	.72	18.29	8.9	226				
27248	28248	7	E2	.62	15.75	.72	18.29	8.9	226				
27269	28269	8	E2	.69	17.53	.80	20.32	9.4	238				
27535	28535	9	E2	.70	17.78	.80	20.32	10.0	254				
27249	28249	10	E2	.75	19.05	.85	21.59	10.5	266	.030	.76	.050	1.27
27250	28250	12	E2	.77	19.56	.87	22.10	10.8	274				
27251	28251	15	E2	.87	22.10	.98	24.89	11.6	294				
27969	28969	19	E2	1.00	25.40	1.11	28.19	12.1	307				
27252	28252	20	E2	1.03	26.16	1.14	28.96	13.3	337				
27270	28270	25	E2	1.10	27.94	1.21	30.73	14.4	365				
27253	28253	30	E2	1.18	29.97	1.29	32.77	15.1	383				
27292	28292	37	E2	1.14	28.96	1.24	31.50	16.1	408				
27433	28433	40	E2	1.28	32.51	1.40	35.56	16.7	424				
27434	28434	50	E2	1.40	35.56	1.52	38.61	18.4	467				

Stranded (7 x 20) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

12 AWG • 12 AWG Uninsulated Ground Wire

Part No.	Part No.	Conductors	Color Code	Armor OD (Inch)	Armor OD (mm)	OD (Nom) (Inch)	OD (Nom) (mm)	Bend Radius (Min) (Inch)	Bend Radius (Min) (mm)	Insulation Thickness (Inch)	Insulation Thickness (mm)	Jacket Thickness (Inch)	Jacket Thickness (mm)
27254	28254	2	E2	.52	13.21	.62	15.75	7.8	198				
27255	28255	3	E2	.54	13.72	.64	16.26	8.0	203				
27256	28256	4	E2	.58	14.73	.68	17.22	8.5	215				
27271	28271	5	E2	.62	15.75	.72	18.29	9.1	231				
27272	28272	6	E2	.67	17.02	.77	19.56	9.6	243				
27273	28273	7	E2	.67	17.02	.77	19.56	9.6	243				
27274	28274	8	E2	.77	19.56	.88	22.35	10.2	259				
27538	28538	9	E2	.76	19.30	.86	21.84	10.8	274				
27275	28275	10	E2	.80	20.32	.91	23.11	11.5	292	.030	.76	.050	1.27
27276	28276	12	E2	.84	21.34	.94	23.88	11.7	297				
27277	28277	15	E2	.94	23.88	1.05	26.67	13.4	340				
27539	28539	19	E2	.05	26.67	1.16	29.46	14.0	355				
27278	28278	20	E2	.16	29.46	1.27	32.26	14.6	370				
27279	28279	25	E2	.26	32.00	1.37	34.80	15.8	401				
27280	28280	30	E2	.29	32.77	1.40	35.56	16.8	426				
27540	28540	37	E2	.44	36.58	1.55	39.37	17.8	452				
27432	28432	40	E2	.50	38.10	1.63	41.40	18.4	467				


BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly



UL Control Cable

600V Type MC Metal Clad Cables

Interlocked Armor



- UL MC
- UL Sun Res
- Oil Res
- Direct Burial

Part No.		Conductors	Color Code	Armor OD		OD (Nom)		Bend Radius (Min)		Insulation Thickness		Jacket Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm

Stranded (7 x 18) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

10 AWG • 10 AWG Uninsulated Ground Wire

27257	28257	2	E2	.56	14.22	.67	17.02	8.4	213				
27258	28258	3	E2	.58	14.73	.69	17.53	8.6	218				
27259	28259	4	E2	.62	15.75	.74	18.80	9.2	233				
27281	28281	5	E2	.68	17.27	.79	20.07	12.8	325				
27282	28282	6	E2	.74	18.80	.84	21.34	10.4	264				
27283	28283	7	E2	.74	18.80	.84	21.34	10.4	264	.030	.76	.050	1.27
27284	28284	8	E2	.81	20.57	.92	23.37	11.2	284				
27541	28541	9	E2	.87	22.10	.98	24.89	11.8	299				
27285	28285	10	E2	.89	22.61	1.03	26.16	13.3	337				
27286	28286	12	E2	1.01	25.65	1.12	28.45	13.7	347				
27287	28287	15	E2	1.09	27.69	1.22	30.99	14.8	375				
27288	28288	20	E2	1.22	30.99	1.35	34.29	16.2	411				
27289	28289	25	E2	1.32	33.53	1.47	37.34	17.8	452	.030	.76	.055	1.40
27290	28290	30	E2	1.42	36.07	1.55	39.37	18.6	472				

Stranded (7 x 16) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

8 AWG • 8 AWG Uninsulated Ground Wire

27291	28291	2	M4	.70	17.78	.81	20.57	9.8	248				
27260	28260	3	M4	.72	18.29	.82	20.83	10.2	259	.045	1.14	.050	1.27
27261	28261	4	M4	.78	19.81	.88	22.35	10.9	276				

Stranded (7 x 14) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

6 AWG • 8 AWG Uninsulated Ground Wire

27293	28293	2	M4	.76	19.30	.87	22.10	10.7	271				
27262	28262	3	M4	.80	20.32	.90	22.86	11.2	284	.045	1.14	.050	1.27
27263	28263	4	M4	.87	22.10	.97	24.64	12.1	307				

Stranded (7 x 12) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

4 AWG • 8 AWG Uninsulated Ground Wire

27264	28264	3	M4	1.90	22.86	1.00	25.40	13.1	332				
27265	28265	4	M4	1.97	50.04	1.08	27.43	14.2	360	.045	1.14	.050	1.27

Stranded (7 x 10) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

2 AWG • 6 AWG Uninsulated Ground Wire

27267	28267	3	M4	1.02	25.91	1.13	28.70	14.7	373				
27268	28268	4	M4	1.11	28.19	1.22	30.99	16.0	406	.045	1.14	.050	1.27

BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL Control Cable

600V Type MC Metal Clad Cables

Interlocked Armor • Composite Cables



- UL MC
- UL Sun Res
- Oil Res
- Direct Burial

Part No.		Conductors	Color Code	Armor OD		OD (Nom)		Bend Radius (Min)		Insulation Thickness		Jacket Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm

Stranded (7 x 22 and 7 x 20) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

14 AWG and 12 AWG • 12 AWG Uninsulated Ground Wire

27428	28428	3 + 3	Note 1	.70	17.78	.81	20.57	9.7	2468	.030	.76	.050	1.27
-------	-------	-------	--------	-----	-------	-----	-------	-----	------	------	-----	------	------

Stranded (7 x 22 and 7 x 18) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

14 AWG and 10 AWG • 10 AWG Uninsulated Ground Wire

27429	28429	3 + 3	Note 1	.74	18.80	.85	21.59	10.2	259	.030	.76	.050	1.27
-------	-------	-------	--------	-----	-------	-----	-------	------	-----	------	-----	------	------

Stranded (7 x 22 and 7 x 16) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

14 AWG and 8 AWG • 10 AWG Uninsulated Ground Wire

27430	28430	3 + 3	Note 1	.83	21.08	.94	23.88	11.2	284	.030 (14 AWG)	.76	.050	1.27
										.045 (8 AWG)	1.14		

Stranded (7 x 22 and 7 x 14) BC Conductors • XLP Insulation • Interlocked Armor • PVC Jacket

14 AWG and 6 AWG • 6 AWG Uninsulated Ground Wire

27431	28431	3 + 3	Note 1	.89	22.61	1.01	25.65	12.0	304	.030 (14 AWG)	.76	.050	1.27
										.045 (8 AWG)	1.14		


Note 1: 14, 12, and 10 AWG use ICEA Table E2 with printed numbers. 8 AWG and larger, use ICEA M4 with printed numbers.

BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly

UL/CSA Control Cable

600V Teck-style® Cables: Dual-Rated Type MC/TECK 90

Interlocked Armor



- UL MC
- CSA C22.2 No.131 FT4 Flame Test, HAZ LOC
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas
- Direct Burial

Part No.		Conductors	Color Code	Inner Jacket OD		Armor OD		OD (Nom)		Pull Tension (Max)		Bend Radius (Min)		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm	Inch	mm

Stranded (7 x 22) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

14 AWG • 14 AWG Uninsulated Ground Wire

27840	28840	2	E2	.37	9.40	.56	14.22	.67	17.02	66	294	8.0	203		
27841	28841	3	E2	.39	9.91	.58	14.73	.69	17.53	98	436	8.3	211		
27842	28842	4	E2	.43	10.92	.62	15.75	.73	18.54	131	583	8.7	221		
27843	28843	5	E2	.47	11.94	.66	16.76	.77	19.56	164	730	9.2	234		
27844	28844	6	E2	.51	12.95	.70	17.78	.81	20.57	191	850	9.7	246		
27845	28845	7	E2	.51	12.95	.70	17.78	.81	20.57	225	1001	9.7	246		
27846	28846	8	E2	.58	14.73	.77	19.56	.88	22.35	260	1157	10.5	267		
27847	28847	10	E2	.67	17.02	.93	23.62	1.04	26.42	321	1428	12.5	318	.030	.76
27848	28848	12	E2	.69	17.53	.95	24.13	1.06	26.92	388	1726	10.9	277		
27849	28849	15	E2	.77	19.56	1.03	26.16	1.14	28.96	481	2140	13.7	348		
27850	28850	20	E2	.86	21.84	1.12	28.45	1.23	31.24	649	2887	15.3	389		
27851	28851	25	E2	.92	23.37	1.18	29.97	1.30	33.02	810	3603	16.3	414		
27852	28852	30	E2	.98	24.89	1.24	31.50	1.36	34.54	975	4337	17.0	432		
27885	28885	40	E2	1.09	27.69	1.35	34.29	1.47	37.34	1301	5787	18.5	470		
27886	28886	50	E2	1.19	30.23	1.45	36.83	1.57	39.88	1630	7251	19.8	503		

Stranded (7 x 20) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

12 AWG • 12 AWG Uninsulated Ground Wire


27853	28853	2	E2	.41	10.41	.60	15.24	.71	18.03	104	463	8.5	216		
27854	28854	3	E2	.43	10.92	.62	15.75	.73	18.54	156	694	8.8	224		
27855	28855	4	E2	.47	11.94	.66	16.76	.77	19.56	207	921	9.2	234		
27856	28856	5	E2	.52	13.21	.71	18.03	.82	20.83	260	1157	9.8	249		
27857	28857	6	E2	.59	14.99	.78	19.81	.89	22.61	310	1379	10.7	272		
27858	28858	7	E2	.59	14.99	.78	19.81	.89	22.61	361	1606	10.7	272		
27859	28859	8	E2	.64	16.26	.83	21.08	.94	23.88	415	1846	11.3	287		
27860	28860	10	E2	.75	19.05	1.01	25.65	1.12	28.45	520	2313	13.4	340	.030	.76
27861	28861	12	E2	.77	19.56	1.03	26.16	1.14	28.96	619	2753	13.7	348		
27862	28862	15	E2	.87	22.10	1.13	28.70	1.25	31.75	718	3194	15.0	381		
27863	28863	20	E2	.96	24.38	1.22	30.99	1.33	33.78	1040	4626	15.9	404		
27864	28864	25	E2	1.04	26.42	1.30	33.02	1.42	36.07	1301	5787	17.0	432		
27865	28865	30	E2	1.15	29.21	1.41	35.81	1.53	38.86	1560	6939	18.3	465		
27887	28887	40	E2	1.20	30.48	1.54	39.12	1.67	42.42	2020	8985	20.0	508		

BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly

UL/CSA Control Cable

600V Teck-style® Cables: Dual-Rated Type MC/TECK 90

Interlocked Armor



- UL MC
- CSA C22.2 No.131 FT4 Flame Test, HAZ LOC
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas
- Direct Burial

Part No.		Conductors	Color Code	Inner Jacket OD		Armor OD		OD (Nom)		Pull Tension (Max)		Bend Radius (Min)		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm	Inch	mm

Stranded (7 x 18) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

10 AWG • 10 AWG Uninsulated Ground Wire

27866	28866	2	E2	.46	11.68	.65	16.51	.74	18.80	166	738	9.1	231		
27867	28867	3	E2	.48	12.19	.67	17.02	.77	19.56	249	1108	9.4	239		
27868	28868	4	E2	.56	14.22	.75	19.05	.84	21.34	330	1468	10.3	262		
27869	28869	5	E2	.67	17.02	.86	21.84	.96	24.38	415	1846	11.6	295		
27870	28870	6	E2	.67	17.02	.86	21.84	.96	24.38	491	2184	11.6	295		
27877	28877	7	E2	.70	17.78	.90	22.86	1.00	25.40	560	2491	12.1	307		
27878	28878	8	E2	.75	19.05	.95	24.13	1.05	26.67	640	2847	12.7	323	.030	.76
27879	28879	10	E2	.78	19.81	1.04	26.42	1.15	29.21	801	3563	13.8	351		
27880	28880	12	E2	.89	22.61	1.15	29.21	1.26	32.00	960	4270	15.1	384		
27881	28881	15	E2	.93	23.62	1.19	30.23	1.30	33.02	1195	5316	15.6	396		
27882	28882	20	E2	1.06	26.92	1.32	33.53	1.44	36.58	1600	7117	17.3	439		
27883	28883	25	E2	1.12	28.45	1.44	36.58	1.58	40.13	1990	8852	19.0	483		
27884	28884	30	E2	1.28	32.51	1.54	39.12	1.67	42.42	2355	10476	20.0	508		

Stranded (7 x 16) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

8 AWG • 10 AWG Uninsulated Ground Wire

27871	28871	2	M4	.59	14.99	.78	19.81	.89	22.61	264	1174	10.7	272		
27872	28872	3	M4	.62	15.75	.81	20.57	.91	23.11	396	1762	10.9	277	.045	1.14
27873	28873	4	M4	.68	17.27	.94	23.88	1.05	26.67	528	2349	12.6	320		

Stranded (7 x 14) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

6 AWG • 8 AWG Uninsulated Ground Wire

27874	28874	2	M4	.71	18.03	.97	24.64	1.08	27.43	420	1868	13.0	330		
27875	28875	3	M4	.76	19.30	1.02	25.91	1.13	28.70	630	2802	13.5	343	.060	1.52
27876	28876	4	M4	.88	22.35	1.14	28.96	1.25	31.75	840	3737	15.0	381		

Stranded (7 x 12) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

4 AWG • 8 AWG Uninsulated Ground Wire

27894	28894	3	M4	.91	23.11	1.17	29.72	1.29	32.77	1002	4457	15.5	394		
27895	28895	4	M4	.99	25.15	1.25	31.75	1.37	34.80	1335	5938	16.4	417	.060	1.52

Stranded (7 x 11) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

3 AWG • 6 AWG Uninsulated Ground Wire

27896	28896	3	M4	.96	24.38	1.22	30.99	1.33	33.78	1263	5618	16.0	406	.060	1.52
-------	-------	---	----	-----	-------	------	-------	------	-------	------	------	------	-----	------	------

Stranded (7 x 10) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

2 AWG • 6 AWG Uninsulated Ground Wire

27888	28888	3	M4	1.08	27.43	1.28	32.51	1.40	35.56	1593	7086	16.8	427		
27889	28889	4	M4	1.12	28.45	1.38	35.05	1.50	38.10	2124	9448	18.0	457	.060	1.52

BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

UL/CSA Control Cable

600V Teck-style® Cables: Dual-Rated Type MC/TECK 90

Interlocked Armor • Composite Cables



- UL MC
- CSA C22.2 No.131 FT4 Flame Test, HAZ LOC
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas
- Direct Burial

Part No.		Conductors	Color Code	Inner Jacket OD		Armor OD		OD (Nom)		Pull Tension (Max)		Bend Radius (Min)		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm	Inch	mm

Stranded (7 x 22 and 7 x 20) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

14 AWG and 12 AWG • 12 AWG Uninsulated Ground Wire

27890	28890	3 + 3	Note 1:	.56	14.22	.75	19.05	.86	21.84	202	899	10.3	262	.030	.76
-------	-------	-------	---------	-----	-------	-----	-------	-----	-------	-----	-----	------	-----	------	-----

Stranded (7 x 22 and 7 x 18) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

14 AWG and 10 AWG • 10 AWG Uninsulated Ground Wire

27891	28891	3 + 3	Note 1:	.61	15.49	.80	20.32	.91	23.11	305	1357	10.9	277	.030	.76
-------	-------	-------	---------	-----	-------	-----	-------	-----	-------	-----	------	------	-----	------	-----

Stranded (7 x 22 and 7 x 16) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

14 AWG and 8 AWG • 10 AWG Uninsulated Ground Wire

27892	28892	3 + 3	Note 1:	.70	17.78	.96	24.38	1.07	27.18	435	1935	12.8	325	.030 (14 AWG)	0.76
														.045 (8 AWG)	1.14

Stranded (7 x 22 and 7 x 14) BC Conductors • XLP Insulation • PVC Inner Jacket • Interlocked Armor • PVC Outer Jacket

14 AWG and 6 AWG • 6 AWG Uninsulated Ground Wire

27893	28893	3 + 3	Note 1:	.90	22.86	1.15	29.21	1.26	32.00	655	2914	15.1	384	.030 (14 AWG)	0.76
														.060 (6 AWG)	1.52

Note 1: 14, 12, and 10 AWG use ICEA Table E2 with printed numbers. 8 AWG and larger, use ICEA M4 with printed numbers.

BC = Bare Copper • PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly

CSA Instrumentation and Thermocouple Tray Cable

300V TC/CIC

Pairs • Unshielded



- 90°C Dry, 75°C Wet (PVC)
- 90°C Dry/Wet (XLP)
- Sunlight Res
- Direct Burial
- CSA C22.2 No. 239 CIC
- CSA C22.2 No. 230 Type TC
- CSA FT4 70,000 BTU Flame Test
- CEC Part 1, Suitable for Use in Hazardous Locations: Class 1, Zone 2 and Class 2, Division 2

Pairs	Part No.				
	7-Strand Copper	Solid EX Chromel/Constantan	Solid JX Iron/Constantan	Solid KX Chromel/Alumel	Solid TX Copper/Constantan
20 AWG • PVC Insulation (Black, White) • PVC Jacket					
1	22000	21100	21114	21128	21142
2	22001	21101	21115	21129	21143
4	22002	21102	21116	21130	21144
6	22003	21103	21117	21131	21145
8	22004	21104	21118	21132	21146
10	22005	21105	21119	21133	21147
12	22006	21106	21120	21134	21148
16	22007	21107	21121	21135	21149
20	22008	21108	21122	21136	21150
24	22009	21109	21123	21137	21151
30	22010	21110	21124	21138	21152
36	22011	21111	21125	21139	21153
40	22012	21112	21126	21140	21154
50	22013	21113	21127	21141	21155
18 AWG • PVC Insulation (Black, White) • PVC Jacket					
1	22027	21156	21170	21184	21198
2	22028	21157	21171	21185	21199
4	22029	21158	21172	21186	21200
6	22030	21159	21173	21187	21201
8	22031	21160	21174	21188	21202
10	22032	21161	21175	21189	21203
12	22033	21162	21176	21190	21204
16	22034	21163	21177	21191	21205
20	22035	21164	21178	21192	21206
24	22036	21165	21179	21193	21207
30	22037	21166	21180	21194	21208
36	22038	21167	21181	21195	21209
40	22039	21168	21182	21196	21210
50	22040	21169	21183	21197	21211
16 AWG • PVC Insulation (Black, White) • PVC Jacket					
1	22054	21212	21226	21240	21254
2	22055	21213	21227	21241	21255
4	22056	21214	21228	21242	21256
6	22057	21215	21229	21243	21257
8	22058	21216	21230	21244	21258
10	22059	21217	21231	21245	21259
12	22060	21218	21232	21246	21260
16	22061	21219	21233	21247	21261
20	22062	21220	21234	21248	21262
24	22063	21221	21235	21249	21263
30	22064	21222	21236	21250	21264
36	22065	21223	21237	21251	21265
40	22066	21224	21238	21252	21266
50	22067	21225	21239	21253	21267

PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Instrumentation and Thermocouple Tray Cable

300V TC/CIC

Triads • Unshielded



- 90°C Dry, 75°C Wet (PVC)
- 90°C Dry/Wet (XLP)
- Sunlight Res
- Direct Burial
- CSA C22.2 No. 239 CIC
- CSA C22.2 No. 230 Type TC
- CSA FT4 70,000 BTU Flame Test
- CEC Part 1, Suitable for Use in Hazardous Locations: Class 1, Zone 2 and Class 2, Division 2

Triads	Part No.		
	20 AWG	18 AWG	16 AWG
Copper Conductors • PVC Insulation (Black, White, Red) • PVC Jacket			
1	22014	22041	22068
2	22015	22042	22069
4	22016	22043	22070
6	22017	22044	22071
8	22018	22045	22072
10	22019	22046	22073
12	22020	22047	22074
16	22021	22048	22075
20	22022	22049	22076
24	22023	22050	22077
30	22024	22051	22078
36	22025	22052	22079

To Create a Part Number

To the base part number, add a letter suffix for conductor, insulation, and, jacket, and a numeric suffix for shielding, as shown below.

Suffix	Conductor	Insulation	Jacket	Suffix	Shielding (includes Drain wire)
A	Bare Copper or Thermocouple Alloy	PVC	PVC	none	No Shielding
B	Tinned Copper	PVC	PVC	1	Overall Foil + Drain Wire
C	Bare Copper or Thermocouple Alloy	XLP	PVC	2	Individual Pairs/ Triads + Overall Foil
D	Tinned Copper	XLP	PVC		

Sample Part Number: 22001B2 = 300V, 2-pair 20 AWG tinned copper conductor cable with PVC insulation, PVC jacket, with individual and overall foil shields plus drain wire.

Thermocouple Color Codes

ANSI Type	Jacket	Insulation	
		Positive (+)	Negative (-)
EX	Purple	Purple	Red
JX	Black	White	Red
KX	Yellow	Yellow	Red
TX	Blue	Blue	Red

PVC = Polyvinyl Chloride • XLP = Cross-Linked Poly

CSA Instrumentation Cable

300V CIC

Contact Belden Customer Service for other options:

- 150V
- XLP insulation (add D suffix to part number)
- Thermocouple alloy conductors
- Overall foil shield only
- Other pair and triad counts

Pairs • Individually Shielded Pairs + Overall Beldfoil® Shielding



- -40°C to +105°C Dry
- -40°C to +75°C Wet
- -25°C Cold Impact
- CSA G22.2 No. 239, Type CIC
- FT4 Flame Test

Part No.	Pairs	Color Code	OD, Nom		Jacket Thickness	
			Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Individually Shielded Pairs + Overall Beldfoil Shielding • Polyester Isolation Tape • PVC Jacket

20 AWG • 7 x 28

22671	1	E1	.260	6.60		
22638	2	E1	.400	10.16	.045	1.14
22639	4	E1	.460	11.68		
22640	6	E1	.570	14.48		
22641	8	E1	.610	15.49		
22676	12	E1	.730	18.54	.060	1.52
22643	16	E1	.810	20.57		
22647	24	E1	1.040	26.42	.080	2.03
22670	36	E1	1.190	30.23		

18 AWG • 7 x 26

22645	1	E1	.300	7.62		
22633	2	E1	.480	12.19	.045	1.14
22648	4	E1	.580	14.73		
22634	6	E1	.670	17.02		
22635	8	E1	.730	18.54	.060	1.52
22636	12	E1	.920	23.37		
22654	16	E1	1.020	25.91	.080	2.03
22637	24	E1	1.260	32.00		

16 AWG • 7 x 24

22646	1	E1	.320	8.13		
22628	2	E1	.520	13.21	.045	1.14
22629	4	E1	.628	15.95		
22630	6	E1	.740	18.80	.060	1.52
22631	8	E1	.800	20.32		
22632	12	E1	1.010	25.65		
22685	16	E1	1.120	28.45	.080	2.03
22686	24	E1	1.380	35.05		

TC = Tinned Copper • PVC = Polyvinyl Chloride



CSA Instrumentation Cable

300V CIC

**Triads • Individually Shielded
Triads + Overall Beldfoil® Shielding**

- -40°C to +105°C Dry
- -40°C to 75°C Wet
- -25°C Cold Impact

- CSA C22.2 No . 239, Type CIC
- FT4 Flame Test

Part No.	Triads	Color Code	OD, Nom		Jacket Thickness	
			Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Individually Shielded Triads + Overall Beldfoil Shielding • Polyester Isolation Tape • Black PVC Jacket

20 AWG • 7 x 28

22660	1	E1	.270	6.86		
22662	2	E1	.420	10.67	.045	1.14
22663	4	E1	.490	12.45		
22672	8	E1	.650	16.51	.060	1.52
22673	16	E1	.910	23.11		
22674	24	E1	1.110	28.19	.080	2.03

18 AWG • 7 x 26

22677	1	E1	.303	7.70		
22678	2	E1	.480	12.19	.045	1.14
22679	4	E1	.620	15.75		
22680	8	E1	.710	18.03	.060	1.52
22681	16	E1	.770	19.56		
22682	24	E1	.980	24.89		
22683	16	E1	1.090	27.69	.080	2.03
22684	24	E1	1.340	34.04		

16 AWG • 7 x 24

22603	1	E1	.329	8.36		
22687	2	E1	.580	14.73	.045	1.14
22675	4	E1	.670	17.02		
22688	6	E1	.780	19.81	.060	1.52
22689	8	E1	.940	23.88	.080	2.03

TC = Tinned Copper • PVC = Polyvinyl Chloride


CSA Instrumentation Cable

300V ACIC Armored Cables

Pairs • Armored • Individually Beldfoil Shielded Pairs + Overall Beldfoil® Shielding

- -40°C to +105°C Dry
- -40°C to 75°C Wet
- -25°C Cold Impact

- CSA C22.2 No. 239, Type ACIC
- CSA C22.2 No. 174, HLABCD
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas (Jacket Only)
- FT4 Flame Test



Part No.		Pairs	Color Code	OD, Inner Jacket		OD, Outer Jacket		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Individually Beldfoil Shielded Pairs + Overall Beldfoil Shielding • Polyester Isolation Tape • PVC Inner Jacket • Armor • Chrome PVC Outer Jacket

20 AWG • 7 x 28

23543	26530	1	E1	.26	6.6	.56	14.2		
23534	26531	2	E1	.40	10.2	.70	17.8		
23514	26532	4	E1	.46	11.7	.76	19.3		
23513	26533	6	E1	.57	14.5	.88	22.4		
23503	26534	8	E1	.63	16.0	.92	23.4		
23521	26535	12	E1	.75	19.1	1.06	26.9	.020	.51
23532	26536	16	E1	.79	20.1	1.16	29.5		
23506	26537	24	E1	1.05	26.7	1.42	36.1		
23544	26538	36	E1	1.14	29.0	1.57	39.9		
23575	26546	50	E1	1.37	34.8	1.75	44.5		

18 AWG • 7 x 26

23533	26514	1	E1	.30	7.6	.60	15.2		
23511	26515	2	E1	.48	12.2	.78	19.8		
23530	26516	4	E1	.58	14.7	.88	22.4		
23528	26517	6	E1	.67	17.0	.98	24.9		
23531	26518	8	E1	.73	18.5	1.03	26.2	.025	.64
23524	26519	12	E1	.90	22.9	1.28	32.5		
23519	26520	16	E1	.99	25.1	1.37	34.8		
23542	26521	24	E1	1.24	31.5	1.63	41.4		
23554	26555	36	E1	1.41	35.8	1.80	45.7		

16 AWG • 7 x 24

23501	26500	1	E1	.33	8.4	.62	15.8		
23527	26501	2	E1	.52	13.2	.81	20.6		
23509	26503	4	E1	.63	16.0	.93	23.6		
23500	26504	6	E1	.73	18.5	1.03	26.2		
23510	26505	8	E1	.79	20.1	1.16	29.5	.025	.64
23525	26506	12	E1	1.00	25.4	1.37	34.8		
23539	26507	16	E1	1.12	28.2	1.48	37.6		
23538	26508	24	E1	1.36	34.5	1.75	44.5		
23568	26551	36	E1	1.60	40.6	1.97	50.0		

TC = Tinned Copper • PVC = Polyvinyl Chloride




CSA Instrumentation Cable

300V ACIC Armored Cables

Triads • Armored • Individually Beldfoil Shielded Triads + Overall Beldfoil® Shielding

- -40°C to +105°C Dry
- -40°C to +75°C Wet
- -25°C Cold Impact

- CSA C22.2 No. 239, Type ACIC
- CSA C22.2 No. 174, HLABCD
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas (Jacket Only)
- FT4 Flame Test



Part No.		Triads	Color Code	OD, Inner Jacket		OD, Outer Jacket		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Individually Beldfoil Shielded Triads + Overall Beldfoil Shielding • Polyester Isolation Tape • PVC Inner Jacket • Armor • Chrome PVC Outer Jacket

20 AWG • 7 x 28

23545	26539	1	E1	.27	6.9	.57	14.5	.020	.51
23546	26540	2	E1	.43	10.9	.73	18.5		
23547	26541	4	E1	.50	12.7	.80	20.3		
23548	26542	8	E1	.69	17.5	1.00	25.4		
23571	26553	12	E1	.82	20.8	1.24	31.5		
23549	26543	16	E1	.91	23.1	1.28	32.5		
23550	26544	24	E1	1.11	28.2	1.48	37.6		

18 AWG • 7 x 26

23505	26522	1	E1	.33	8.4	.61	15.5	.025	.64
23516	26523	2	E1	.51	13.0	.81	20.6		
23515	26524	4	E1	.62	15.7	.93	23.6		
23508	26525	6	E1	.75	19.1	1.11	28.2		
23523	26526	8	E1	.81	20.6	1.18	30.0		
23512	26527	12	E1	1.03	26.2	1.40	35.6		
23537	26528	16	E1	1.13	28.7	1.50	38.1		
23536	26529	24	E1	1.37	34.8	1.80	45.7		

16 AWG • 7 x 24

23507	26502	1	E1	.35	8.9	.63	16.0	.025	.64
23522	26509	2	E1	.58	14.7	.90	22.9		
23520	26510	4	E1	.68	17.3	.95	24.1		
23529	26511	6	E1	.78	19.8	1.19	30.2		
23526	26512	8	E1	.93	23.6	1.30	33.0		
23541	26513	12	E1	1.13	28.7	1.50	38.1		
23567	26545	16	E1	1.25	31.8	1.64	41.7		
23578	26547	24	E1	1.58	40.1	1.95	49.5		

TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Instrumentation Cable

600V ACIC Armored Cables

Pairs • Armored • Individually Beldfoil Shielded Pairs + Overall Beldfoil® Shielding



- -40°C to +105°C Dry
- -40°C to +75°C Wet
- -25°C Cold Impact

- CSA C22.2 No. 239, Type ACIC
- CSA C22.2 No. 174, HLABCD
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas (Jacket Only)
- FT4 Flame Test

Part No.		Pairs	Color Code	OD, Inner Jacket		OD, Outer Jacket		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Individually Beldfoil Shielded Pairs + Overall Beldfoil Shielding • Polyester Isolation Tape • PVC Inner Jacket • Armor • Chrome PVC Outer Jacket


18 AWG • 7 x 26

24511	25506	1	E1	.32	8.13	.61	15.49	.030	.76
24512	25514	2	E1	.51	12.95	.82	20.83		
24513	25503	4	E1	.63	16.00	.93	23.62		
24514	25505	8	E1	.79	20.27	1.15	29.21		
24515	25501	12	E1	1.00	25.40	1.36	34.54		
24520	25517	24	E1	1.36	34.54	1.75	44.45		

16 AWG • 7 x 24

24500	25504	1	E1	.34	8.64	.64	16.26	.030	.76
24505	25510	2	E1	.59	14.99	.89	22.61		
24502	25511	4	E1	.68	17.27	.98	24.89		
24506	25512	6	E1	.79	20.07	1.16	29.46		
24503	25513	8	E1	.90	22.86	1.27	32.26		
24504	25518	12	E1	1.09	27.69	1.46	37.08		
24510	25519	24	E1	1.49	37.85	1.88	47.75		

Triads • Armored • Individually Beldfoil Shielded Triads + Overall Beldfoil Shielding



- -40°C to +105°C Dry
- -40°C to +75°C Wet
- -25°C Cold Impact

- CSA C22.2 No. 239, Type ACIC
- CSA C22.2 No. 174, HLABCD
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas (Jacket Only)
- FT4 Flame Test

Part No.		Triads	Color Code	OD, Inner Jacket		OD, Outer Jacket		Insulation Thickness	
Aluminum	Steel			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Individually Beldfoil Shielded Triads + Overall Beldfoil Shielding • Polyester Isolation Tape • PVC Inner Jacket • Armor • Chrome PVC Outer Jacket

18 AWG • 7 x 26

24516	25500	1	E1	.34	8.64	.63	16.00	.030	.76
24517	25522	2	E1	.58	14.73	.89	22.61		
24518	25520	4	E1	.66	16.76	.99	25.15		
24519	25523	8	E1	.88	22.35	1.29	32.77		

16 AWG • 7 x 24

24501	25502	1	E1	.36	9.14	.66	16.76	.030	.76
24507	25507	2	E1	.62	15.75	.94	23.88		
24508	25509	4	E1	.72	18.29	1.05	26.67		
24509	25508	8	E1	.96	24.38	1.33	33.78		

TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Control and Power Cable

600V and 1000V TC/CIC Multi-Conductor Cables

Unshielded



- CEC Part 1, Suitable for Use in Hazardous Locations: Class 1, Zone 2 and Class 2, Division 2
- 90°C Dry & Wet
- -40°C Cold Bend
- -25°C Cold Impact
- CSA C22.2 No. 230 Type TC
- CSA C22.2 No. 239 Type CIC (600V only)
- CSA C22.2 No. 38 Type TC (1000V only)
- CSA FT4 70,000 BTU Flame test

Conductors	Part No.					
	14 AWG		12 AWG		10 AWG	
	600V	1000V	600V	1000V	600V	1000V

Unshielded • For Foil Shielding, add "S" as a Suffix to the Part Number

7-Strand BC Conductors • Flame Resistant Cross-Linked Poly Insulation • Uninsulated BC Ground Conductor • Optional Foil Shielding • Flame Resistant PVC Jacket						
2	21500	21300	21550	21350	21600	21400
3	21501	21301	21551	21351	21601	21401
4	21502	21302	21552	21352	21602	21402
5	21503	21303	21553	21353	21603	21403
6	21504	21304	21554	21354	21604	21404
7	21505	21305	21555	21355	21605	21405
8	21506	21306	21556	21356	21606	21406
9	21507	21307	21557	21357	21607	21407
10	21508	21308	21558	21358	21608	21408
11	21509	21309	21559	21359	21609	21409
12	21510	21310	21560	21360	21610	21410
13	21511	21311	21561	21361	21611	21411
14	21512	21312	21562	21362	21612	21412
15	21513	21313	21563	21363	21613	21413
16	21514	21314	21564	21364	21614	21414
17	21515	21315	21565	21365	21615	21415
18	21516	21316	21566	21366	21616	21416
19	21517	21317	21567	21367	21617	21417
20	21518	21318	21568	21368	21618	21418
21	21519	21319	21569	21369	21619	21419
22	21520	21320	21570	21370	21620	21420
23	21521	21321	21571	21371	21621	21421
24	21522	21322	21572	21372	21622	21422
25	21523	21323	21573	21373	21623	21423
26	21524	21324	21574	21374	21624	21424
27	21525	21325	21575	21375	21625	21425
28	21526	21326	21576	21376	21626	21426
29	21527	21327	21577	21377	21627	21427
30	21528	21328	21578	21378	21628	21428
31	21529	21329	21579	21379	21629	21429
32	21530	21330	21580	21380	21630	21430
33	21531	21331	21581	21381	21631	21431
34	21532	21332	21582	21382	21632	21432
35	21533	21333	21583	21383	21633	21433
36	21534	21334	21584	21384	21634	21434
37	21535	21335	21585	21385	21635	21435
38	21536	21336	21586	21386	21636	21436
39	21537	21337	21587	21387	21637	21437
40	21538	21338	21588	21388	21638	21438

BC = Bare Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Control and Power Cable *(continued)*

600V and 1000V TC/CIC Multi-Conductor Cables

Unshielded



- CEC Part 1, Suitable for Use in Hazardous Locations: Class 1, Zone 2 and Class 2, Division 2
- 90°C Dry & Wet
- -40°C Cold Bend
- -25°C Cold Impact
- CSA C22.2 No. 230 Type TC
- CSA C22.2 No. 239 Type CIC (600V only)
- CSA C22.2 No. 38 Type TC (1000V only)
- CSA FT4 70,000 BTU Flame test

Conductors	Part No.					
	14 AWG		12 AWG		10 AWG	
	600V	1000V	600V	1000V	600V	1000V

Unshielded • For Foil Shielding, add "S" as a Suffix to the Part Number

7-Strand BC Conductors • Flame Resistant Cross-Linked Poly Insulation • Uninsulated BC Ground Conductor • Optional Foil Shielding • Flame Resistant PVC Jacket						
41	21539	21339	21589	21389	21639	21439
42	21540	21340	21590	21390	21640	21440
43	21541	21341	21591	21391	21641	21441
44	21542	21342	21592	21392	21642	21442
45	21543	21343	21593	21393	21643	21443
46	21544	21344	21594	21394	21644	21444
47	21545	21345	21595	21395	21645	21445
48	21546	21346	21596	21396	21646	21446
49	21547	21347	21597	21397	21647	21447
50	21548	21348	21598	21398	21648	21448

Conductors	Part No.									
	8 AWG		6 AWG		4 AWG		3 AWG		2 AWG	
	600V	1000V	600V	1000V	600V	1000V	600V	1000V	600V	1000V

Unshielded • For Foil Shielding, add "S" as a Suffix to the Part Number

7-Strand BC Conductors • Flame Resistant Cross-Linked Poly Insulation • Optional Foil Shielding • Flame Resistant PVC Jacket										
2	21650	21450	21653	21453	21656	21456	21659	21459	21662	21462
3	21651	21451	21654	21454	21657	21457	21660	21460	21663	21463
4	21652	21452	21655	21455	21658	21458	21661	21461	21664	21464

Conductors	Part No.									
	1 AWG		1/0 AWG		2/0 AWG		3/0 AWG		4/0 AWG	
	600V	1000V	600V	1000V	600V	1000V	600V	1000V	600V	1000V

Unshielded • For Foil Shielding, add "S" as a Suffix to the Part Number

19-Strand BC Conductors • Flame Resistant Cross-Linked Poly Insulation • Optional Foil Shielding • Flame Resistant PVC Jacket										
2	21665	21465	21668	21468	21671	21471	21674	21474	21677	21477
3	21666	21466	21669	21469	21672	21472	21675	21475	21678	21478
4	21667	21467	21670	21470	21673	21473	21676	21476	21679	21479

Conductor Color Codes

Conductors	Colors
2	Black, White
3	Black, White, Blue
4	Black, Red, White, Blue
5 or More	Black and Numbered

BC = Bare Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Control Cable

600V CIC Multi-Conductor Cables

Unshielded



- -40°C to +90°C Dry
- -40°C to +90°C Wet
- -25°C Cold Impact
- CSA C22.2 No. 231 Type CIC
- CSA FT4 Flame Test

Part No.	Conductors	Color Code	OD, Nom		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded BC Conductors • Stranded BC Drain Wire • Cross-Linked Poly Insulation • Black PVC Jacket

14 AWG • 7 x 22 • Unshielded

22100	2	Blk, Nmbred	.367	9.32				
22101	3	Blk, Nmbred	.388	9.86				
22102	4	Blk, Nmbred	.423	10.74				
22103	5	Blk, Nmbred	.462	11.74	.030	.76	.045	1.14
22104	6	Blk, Nmbred	.504	12.80				
22105	7	Blk, Nmbred	.504	12.80				
22106	8	Blk, Nmbred	.576	14.63				
22107	9	Blk, Nmbred	.618	15.70				
22108	10	Blk, Nmbred	.669	17.00	.030	.76	.060	1.52
22110	12	Blk, Nmbred	.689	17.50				
22114	16	Blk, Nmbred	.764	19.41				
22118	20	Blk, Nmbred	.886	22.50	.030	.76	.080	2.03

12 AWG • 7 x 20 • Unshielded

22120	2	Blk, Nmbred	.405	10.29				
22121	3	Blk, Nmbred	.429	10.90				
22122	4	Blk, Nmbred	.469	11.91	.030	.76	.045	1.14
22123	5	Blk, Nmbred	.515	13.08				
22124	6	Blk, Nmbred	.591	15.01				
22125	7	Blk, Nmbred	.591	15.01				
22126	8	Blk, Nmbred	.639	16.23	.030	.76	.060	1.52
22127	9	Blk, Nmbred	.687	17.45				
22128	10	Blk, Nmbred	.745	18.92				
22130	12	Blk, Nmbred	.768	19.51				
22134	16	Blk, Nmbred	.893	22.68	.030	.76	.080	2.03
22138	20	Blk, Nmbred	.992	25.20				

10 AWG • 7 x 18 • Unshielded

22140	2	Blk, Nmbred	.736	18.69				
22141	3	Blk, Nmbred	.763	19.38	.030	.76	.045	1.14
22142	4	Blk, Nmbred	.839	21.31				
22143	5	Blk, Nmbred	.891	22.63				
22144	6	Blk, Nmbred	.944	23.98				
22145	7	Blk, Nmbred	.944	23.98	.030	.76	.060	1.52
22146	8	Blk, Nmbred	.999	25.38				
22147	9	Blk, Nmbred	1.074	27.28				
22148	10	Blk, Nmbred	1.182	30.02				
22150	12	Blk, Nmbred	1.209	30.71	.030	.76	.080	2.03
22152	14	Blk, Nmbred	1.255	31.88				
22154	16	Blk, Nmbred	1.307	33.20				


BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Control Cable

600V CIC Multi-Conductor Cables

Unshielded

- -40°C to +90°C Dry
- -40°C to +90°C Wet
- -25°C Cold Impact

- CSA C22.2 No. 231 Type CIC
- CSA FT4 Flame Test

Part No.	Conductors	Color Code	OD, Nom		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded BC Conductors • Stranded BC Drain Wire • Cross-Linked Poly Insulation • Black PVC Jacket

8 AWG • 7 x 16 • Unshielded

22160	2	Blk, Nmbred	.863	21.92				
22161	3	Blk, Nmbred	.898	22.81	.045	1.14	.060	1.52
22162	4	Blk, Nmbred	.957	24.31				

6 AWG • 7 x 14 • Unshielded

22170	2	Blk, Nmbred	.711	18.06	.060	1.52	.060	1.52
22171	3	Blk, Nmbred	.756	19.20				

4 AWG • 7 x 12 • Unshielded


22180	2	Blk, Nmbred	.800	20.32	.060	1.52	.060	1.52
22181	3	Blk, Nmbred	.891	22.63				

BC = Bare Copper • PVC = Polyvinyl Chloride

CSA Control Cable

600V ACIC and TECK 90 Cables — Overview

Belden® TECK 90 and ACIC cables are designed to meet demanding industrial needs by combining rugged durability and corrosion resistance with flexibility and easy handling.

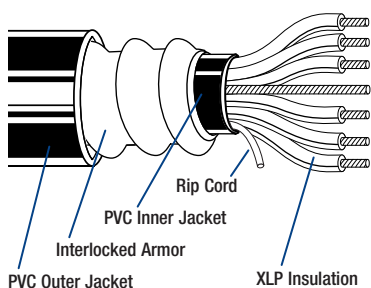

Introduction

TECK 90 and ACIC Cables are available in a wide range of standard and custom constructions to meet the needs of oil and gas, pulp and paper, chemical, petroleum and other demanding industrial and resource industry environments. They are ideal for use in wet or dry areas, ventilated or non-ventilated, ladder-type cable troughs, flexible cableways and direct burial installations.

Belden TECK 90 Cable is marked with "FT4," "HL" designations, and cable constructions are certified to CSA Standard C22.2 No. 131 and C22.2 No. 174 for use in a wide range of hazardous locations. Both inner and outer jackets meet the acid gas evolution requirement of 14% maximum required by CSA Standard C22.2 No. 0.3 Clause 4.31.

Custom cables are available upon request.

Construction

Class B stranded bare copper conductors, cross-link polyethylene insulation, bare copper ground wire, PVC inner jacket, aluminum steel interlocking armor, PVC outer jacket.

- Galvanized steel interlocking armor available as an option.

Voltage Rating

18 to 16 AWG—600V ACIC

14 to 8 AWG—600V

14 to 4/0 AWG—1000V

Temperature Rating

-40°C to 90°C (Dry/Wet)

-25°C installed

Application

TECK 90 and ACIC are general-purpose cables used in the oil and gas, pulp and paper, mining, petroleum and chemical industries as well as in commercial buildings.

TECK 90 and ACIC may be used under the following conditions:

- Exposed or concealed wiring in dry or wet conditions
- In ventilated, non-ventilated or ladder-type cable trays in dry or wet conditions
- On walls or beams
- Directly buried
- CEC Class I, Division I locations

Minimum Bending Radius

12 times the overall cable diameter

Pulling Tensions

The combined use of Kellems grips and pulling eyes is recommended.

Design Advantages

Insulation Properties

- High tensile strength
- Impact- and crush-resistant
- Heat-resistant
- Excellent elongation
- Moisture-resistant
- Good low temperature properties

Electrical Properties

- High insulation resistance
- Low dielectric loss
- High dielectric strength

Other Features

- Corrosion-resistant
- Versatile and flexible
- Provides cost savings as conduit and ducts are not required
- ACIC has a blue jacket
- Rip cord for inner jacket


Specifications

- CSA Standard C22.2 No. 131
- CSA Standard C22.2 No. 174 "Cables and Cable Glands for Use in Hazardous Locations"
- CSA Standard C22.2 No. 0.3 Clause 4.31 "Low Acid Gas"
- CSA Standard C22.2 No. 0.3 Clause 4.11.4 "Cables with FT4 Marking"

CSA Control Cable

600V ACIC Cables

Armored • Unshielded



- CSA C22.2 No. 239 CIC
- CSA C22.2 No. 0.3 Clause 4.31
Low Acid Gas
- HAZ LOC

Part No.	Conductors	Inner Jacket OD		Armor OD		Outer Jacket OD		Pull Tension, Max		Bend Radius, Min	
		Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm

Stranded BC Conductors • Cross-Linked Poly Insulation • Uninsulated BC Ground Wire • PVC Inner Jacket • Armor • Blue PVC Outer Jacket

18 AWG • 7 x 26

29030	2	.32	8.13	.52	13.21	.62	15.75	44	196	7.4	187.96
29031	3	.34	8.64	.54	13.72	.64	16.26	66	294	7.6	193.04
29032	4	.37	9.40	.57	14.48	.67	17.02	88	392	8.0	203.20
29033	5	.41	10.41	.61	15.49	.71	18.03	110	490	8.5	215.90
29034	6	.45	11.43	.65	16.51	.75	19.05	132	587	9.0	228.60
29035	7	.45	11.43	.65	16.51	.75	19.05	154	685	9.0	228.60
29036	8	.48	12.19	.68	17.27	.78	19.81	176	783	9.3	236.22
29038	10	.56	14.22	.76	19.30	.87	22.10	220	979	10.6	269.24
29040	12	.62	15.75	.82	20.83	.93	23.62	264	1175	11.1	281.94
29043	15	.65	16.51	.85	21.59	.96	24.38	330	1469	11.5	292.10
29048	20	.73	18.54	.93	23.62	1.04	26.42	440	1958	12.4	314.96
29053	25	.79	20.07	1.05	26.67	1.16	29.46	550	2448	13.9	353.06
29058	30	.88	22.35	1.14	28.96	1.25	31.75	660	2937	15.0	381.00
29068	40	.97	24.64	1.23	31.24	1.35	34.29	880	3916	16.2	411.48
29078	50	1.09	27.69	1.35	34.29	1.47	37.34	1100	4895	17.6	447.04

16 AWG • 7 x 24

29017	2	.34	8.64	.54	13.72	.65	16.51	70	312	7.7	195.58
29004	3	.36	9.14	.56	14.22	.66	16.76	105	467	7.9	200.66
29018	4	.39	9.91	.59	14.99	.70	17.78	140	623	8.3	210.82
29019	5	.42	10.67	.62	15.75	.73	18.54	175	779	8.6	218.44
29005	6	.46	11.68	.66	16.76	.77	19.56	210	935	9.1	231.14
29020	7	.47	11.94	.67	17.02	.77	19.56	245	1090	9.2	233.68
29021	8	.50	12.70	.70	17.78	.80	20.32	280	1246	9.6	243.84
29022	10	.61	15.49	.81	20.57	.92	23.37	350	1558	10.9	276.86
29006	12	.63	16.00	.83	21.08	.94	23.88	420	1869	11.2	284.48
29023	15	.68	17.27	.88	22.35	1.00	25.40	525	2336	11.9	302.26
29007	20	.77	19.56	1.03	26.16	1.13	28.70	700	3115	13.7	347.98
29024	25	.89	22.61	1.15	29.21	1.26	32.00	875	3894	15.1	383.54
29008	30	.94	23.88	1.20	30.48	1.30	33.02	1050	4673	15.8	401.32
29009	40	1.06	26.92	1.32	33.53	1.41	35.81	1400	6230	17.3	439.42
29016	50	1.19	30.23	1.45	36.83	1.54	39.12	1750	7788	18.8	477.52
29025	60	1.27	32.26	1.53	38.86	1.66	42.16	2100	9345	19.9	505.46

Conductor Color Codes

Conductors	Colors
2	Black, White
3	Black, White, Blue
4	Black, Red, White, Blue
5 or More	Black and Numbered


BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Control Cable

600V TECK 90 Cables

Armored • Unshielded

- CSA C22.2 No. 131 Type TECK 90
- CSA C22.2 No. 0.3 Clause 4.31
Low Acid Gas
- HAZ LOC

Part No.	Conductors	Inner Jacket OD		Armor OD		Outer Jacket OD		Pull Tension, Max		Bend Radius, Min	
		Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm

Stranded BC Conductors • Cross-Linked Poly Insulation • Uninsulated BC Ground Wire • PVC Inner Jacket • Armor • Black PVC Outer Jacket

14 AWG • 7 x 22

C5500	2	.36	9.14	.56	14.22	.66	16.76	108	481	7.8	198.12
C5501	3	.39	9.91	.58	14.73	.66	16.76	162	721	8.2	208.28
C5502	4	.42	10.67	.62	15.75	.71	18.03	216	961	8.5	215.90
C5503	5	.47	11.94	.66	16.76	.74	18.80	270	1202	9.0	228.60
C5504	6	.51	12.95	.70	17.78	.78	19.81	324	1442	9.5	241.30
C5505	7	.51	12.95	.70	17.78	.78	19.81	378	1682	9.5	241.30
C5506	8	.58	14.73	.77	19.56	.86	21.84	432	1922	10.4	264.16
C5508	10	.67	17.02	.93	23.62	.95	24.13	540	2403	12.3	312.42
C5510	12	.69	17.53	.95	24.13	.97	24.64	648	2884	12.6	320.04
C5513	15	.77	19.56	1.03	26.16	1.11	28.19	810	3605	14.1	358.14
C5518	20	.90	22.86	1.16	29.46	1.24	31.50	1080	4806	15.1	383.54
C5523	25	.90	22.86	1.24	31.50	1.33	33.78	1350	6008	16.1	408.94
C5528	30	1.05	26.67	1.30	33.02	1.40	35.56	1620	7209	16.8	426.72
C5529	40	1.20	30.48	1.42	36.07	1.51	38.35	2160	9612	18.3	464.82
C6064	50	1.35	34.29	1.60	40.64	1.66	42.16	2700	12,015	20.5	520.70

12 AWG • 7 x 20

C5530	2	.41	10.41	.60	15.24	.69	17.53	172	765	8.3	210.82
C5531	3	.43	10.92	.62	15.75	.70	17.78	258	1148	8.6	218.44
C5532	4	.47	11.94	.66	16.76	.73	18.54	344	1531	9.1	231.14
C5533	5	.52	13.21	.71	18.03	.78	19.81	430	1914	9.1	231.14
C5534	6	.59	14.99	.78	19.81	.86	21.84	516	2296	10.5	266.70
C5535	7	.59	14.99	.78	19.81	.86	21.84	602	2679	10.5	266.70
C5536	8	.64	16.26	.83	21.08	.92	23.37	688	3062	11.1	281.94
C5538	10	.75	19.05	1.01	25.65	1.02	25.91	860	3827	13.3	337.82
C5540	12	.77	19.56	1.03	26.16	1.12	28.45	1032	4592	13.5	342.90
C5543	15	.90	22.86	1.16	29.46	1.24	31.50	1290	5741	15.1	383.54
C5548	20	.99	25.15	1.25	31.75	1.34	34.04	1720	7654	16.5	419.10
C5553	25	1.10	27.94	1.36	34.54	1.45	36.83	2150	9568	17.6	447.04
C5558	30	1.20	30.48	1.46	37.08	1.51	38.35	2580	11,481	17.6	447.04

Conductor Color Codes


Conductors	Colors
2	Black, White
3	Black, White, Blue
4	Black, Red, White, Blue
5 or More	Black and Numbered

BC = Bare Copper • PVC = Polyvinyl Chloride

CSA Control Cable

600V TECK 90 Cables

Armored • Unshielded



- CSA C22.2 No. 131 Type TECK 90
- CSA C22.2 No. 0.3 Clause 4.31
Low Acid Gas
- HAZ LOC

Part No.	Conductors	Inner Jacket OD		Armor OD		Outer Jacket OD		Pull Tension, Max		Bend Radius, Min	
		Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm

Stranded BC Conductors • Cross-Linked Poly Insulation • Uninsulated BC Ground Wire • PVC Inner Jacket • Armor • Black PVC Outer Jacket

10 AWG • 7 x 18

C5560	2	.48	12.19	.66	16.76	.72	18.29	296	1317	8.9	226.06
C5561	3	.50	12.70	.70	17.78	.75	19.05	444	1976	9.2	233.68
C5562	4	.57	14.48	.77	19.56	.79	20.07	592	2634	10.1	256.64
C5563	5	.63	16.00	.83	21.08	.93	23.62	740	3293	11.5	292.10
C5564	6	.68	17.27	.88	22.35	.93	23.62	888	3952	11.5	292.10
C5565	7	.69	17.53	.89	22.61	.99	25.15	1036	4610	11.8	299.72
C5566	8	.74	18.80	.94	23.88	1.00	25.40	1184	5269	12.4	314.96
C5568	10	.84	21.34	1.10	27.94	1.24	31.50	1480	6586	14.4	365.76
C5570	12	.93	23.62	1.19	30.23	1.26	32.00	1776	7903	15.6	396.24
C5573	15	.99	25.15	1.25	31.75	1.37	34.80	2220	9879	16.3	414.02
C5578	20	1.13	28.70	1.39	35.31	1.47	37.34	2960	13,172	16.9	429.26
C5579	25	1.26	32.00	1.52	38.61	1.60	40.64	3700	16,465	19.7	500.38
C5580	30	1.34	34.04	1.60	40.64	1.66	42.16	4440	19,758	20.6	523.24

8 AWG • 7 x 16

C5583	2	.59	14.99	.78	19.81	.86	21.84	384	1709	10.6	269.24
C5581	3	.63	16.00	.83	21.08	.90	22.86	576	2563	10.8	274.32
C5582	4	.69	17.53	.89	22.61	.97	24.64	768	3418	12.5	317.50


Conductor Color Codes

Conductors	Colors
2	Black, White
3	Black, White, Blue
4	Black, Red, White, Blue
5 or More	Black and Numbered

BC = Bare Copper • PVC = Polyvinyl Chloride

CSA Control Cable
600V TECK 90 Composite Cables

Composite • Armored • Unshielded



- Sunlight Res
- CSA C22.2 No. 131 Type TECK 90
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas
- HAZ LOC

Part No.	Conductors	Color Code	Inner Jacket OD		Armor OD		Outer Jacket OD		Pull Tension, Max		Bend Radius, Min	
			Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm

Stranded BC Conductors • Cross-linked Poly Insulation • PVC Inner Jacket • Armor • Black PVC Outer Jacket

14 and 12 AWG • 7 x 22 and 7 x 20 • 14 AWG Uninsulated Ground Wire

6054	3 + 3	E2	.560	14.22	.75	19.05	.89	22.61	424	1886	8.4	213.36
------	-------	----	------	-------	-----	-------	-----	-------	-----	------	-----	--------

14 and 10 AWG • 7 x 22 and 7 x 18 • 12 AWG Uninsulated Ground Wire

6051	3 + 3	E2	.600	15.24	.82	20.83	.92	23.37	608	2705	9.0	228.60
------	-------	----	------	-------	-----	-------	-----	-------	-----	------	-----	--------

14 and 8 AWG • 7 x 22 and 7 x 16 • 10 AWG Uninsulated Ground Wire

6059	3 + 3	E2	.700	17.78	.89	22.51	.98	24.92	1160	5160	9.8	248.92
------	-------	----	------	-------	-----	-------	-----	-------	------	------	-----	--------

14 and 6 AWG • 7 x 22 and 7 x 14 • 8 AWG Uninsulated Ground Wire


6060	3 + 3	E2	.810	20.57	1.06	27.00	1.16	29.41	1700	7562	11.6	294.64
------	-------	----	------	-------	------	-------	------	-------	------	------	------	--------

BC = Bare Copper • PVC = Polyvinyl Chloride

CSA Control Cable

1000V TECK 90 Cables

Armored • Unshielded



- CSA C22.2 No. 131 Type TECK 90
- CSA C22.2 No. 0.3 Clause 4.31
Low Acid Gas
- HAZ LOC

Part No.	Conductors	Inner Jacket OD		Armor OD		Outer Jacket OD		Pull Tension, Max		Bend Radius, Min	
		Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm

Stranded BC Conductors • Cross-linked Poly Insulation • PVC Inner Jacket • Armor • Black PVC Outer Jacket

14 AWG • 7 x 22 • 14 AWG Uninsulated Ground Wire

C5701	3	.47	11.94	.67	17.02	.73	18.54	162	721	9.2	233.68
C5702	4	.51	12.95	.71	18.03	.81	20.57	216	961	9.7	246.38

12 AWG • 7 x 20 • 14 AWG Uninsulated Ground Wire

C5730	2	.48	12.19	.68	17.27	.74	18.80	172	765	9.3	236.22
C5731	3	.51	12.95	.71	18.03	.76	19.30	258	1148	9.7	246.38
C5732	4	.59	14.99	.75	19.05	.85	21.59	344	1531	10.8	274.32

10 AWG • 7 x 18 • 12 AWG Uninsulated Ground Wire

C5760	2	.56	14.22	.79	19.99	.70	17.71	296	1317	10.3	261.62
C5761	3	.59	14.99	.79	20.07	.85	21.59	444	1976	10.3	261.62
C5762	4	.65	16.51	.85	21.59	.90	22.86	592	2634	11.5	292.10

8 AWG • 7 x 16 • 10 AWG Uninsulated Ground Wire

C5583	2	.59	14.99	.78	19.81	.86	21.84	384	1709	10.6	269.24
C5581	3	.63	16.00	.83	21.08	.90	22.86	576	2563	10.8	274.32
C5582	4	.69	17.53	.89	22.61	.97	24.64	768	3418	12.5	317.50

6 AWG • 7 x 14 • 8 AWG Uninsulated Ground Wire

C5590	2	.73	18.54	.99	25.15	1.10	27.94	610	2713	12.8	325.12
C5591	3	.78	19.81	1.04	26.42	1.15	29.21	915	4072	13.4	340.36
C5592	4	.89	22.61	1.15	29.21	1.24	31.50	1220	5429	14.9	378.46

Conductor Color Codes

Conductors	Colors
2	Black, White
3	Black, White, Blue
4	Black, Red, White, Blue

BC = Bare Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

CSA Control Cable

1000V TECK 90 Cables

Armored • Unshielded



- CSA C22.2 No. 131 Type TECK 90
- CSA C22.2 No. 0.3 Clause 4.31 Low Acid Gas
- HAZ LOC

Part No.	Conductors	Inner Jacket OD		Armor OD		Outer Jacket OD		Pull Tension, Max		Bend Radius, Min	
		Inch	mm	Inch	mm	Inch	mm	Lbs	N	Inch	mm

Stranded BC Conductors • Cross-linked Poly Insulation • PVC Inner Jacket • Armor • Black PVC Outer Jacket

4 AWG • 7 x 12 • 8 AWG Uninsulated Ground Wire

C5601	3	.91	23.11	1.17	29.72	1.23	31.24	1455	6475	15.2	386.08
C5602	4	.91	23.11	1.25	31.75	1.33	33.78	1940	8633	16.2	411.48

3 AWG • 7 x 11 • 6 AWG Uninsulated Ground Wire

C5611	3	.97	24.64	1.23	31.24	1.30	33.02	1836	8170	15.8	401.32
-------	---	-----	-------	------	-------	------	-------	------	------	------	--------

2 AWG • 7 x 10 • 6 AWG Uninsulated Ground Wire

C5621	3	1.02	25.91	1.28	32.51	1.37	34.80	2316	10,302	16.5	419.10
C5622	4	1.12	28.45	1.38	35.05	1.48	37.59	3088	13,736	17.7	449.58

1 AWG • 19 x 14 • 6 AWG Uninsulated Ground Wire

C5625	3	1.25	31.75	1.51	38.35	1.59	40.39	1980	8807	19.1	485.14
C5626	4	1.34	34.04	1.57	39.88	1.68	42.67	2680	11,921	20.2	513.08

1/0 AWG • 19 x 12 • 6 AWG Uninsulated Ground Wire

C5627	3	1.34	34.04	1.60	40.64	1.67	42.42	3582	15,940	20.0	508.0
6164	4	1.44	36.58	1.67	42.42	1.78	45.21	4700	20,906	21.4	543.56

2/0 AWG • 19 x 11 • 6 AWG Uninsulated Ground Wire

C5635	3	1.40	35.56	1.63	41.40	1.74	44.20	4200	12010	20.9	530.86
6157	4	1.55	39.37	1.84	46.74	1.95	49.53	5500	24,465	23.4	594.36

3/0 AWG • 19 x 10 • 4 AWG Uninsulated Ground Wire

6163	3	1.51	38.10	1.80	45.72	1.91	48.26	5020	11,121	22.9	579.12
6179	4	1.67	42.42	1.96	49.78	2.07	52.58	6500	28,913	24.8	629.92

4/0 AWG • 19 x 9.5 • 4 AWG Uninsulated Ground Wire

6193	3	1.63	41.40	1.92	48.77	2.03	51.56	6650	29,580	24.4	619.76
------	---	------	-------	------	-------	------	-------	------	--------	------	--------

Conductor Color Codes

Conductors	Colors
3	Black, White, Blue
4	Black, Red, White, Blue

BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Technical Information

Gland Information for Armored Cables

Thomas and Betts

Part No.	Hub Size NPT	Range Over Jacket			
		Minimum		Maximum	
		Inch	mm	Inch	mm
ST050-462	1/2	.525	13.34	.650	16.51
ST050-464	1/2	.600	15.24	.760	19.30
ST050-465	1/2	.725	18.42	.885	22.48
ST050-466	1/2	.825	20.96	.985	25.02
ST075-467	3/4	.880	22.35	1.065	27.05
ST075-468	3/4	1.025	26.04	1.205	30.61
ST100-469	1	1.187	30.15	1.375	34.93
ST125-470	1-1/4	1.350	34.29	1.625	41.28
ST125-550	1-1/4	1.500	38.10	1.625	41.28
ST125-471	1-1/4	1.600	40.64	1.875	47.63
ST150-472	1-1/2	1.700	43.18	1.965	49.91
ST150-473	1-1/2	1.900	48.26	2.187	55.55
ST200-551	2	1.900	48.26	2.187	55.55
ST200-474	2	2.100	53.34	2.375	60.33
ST200-475	2	2.300	58.42	2.565	65.15
ST200-476	2	2.500	63.50	2.750	69.85
ST250-477	2-1/2	2.380	60.45	2.640	67.06
ST250-478	2-1/2	2.580	65.53	2.840	72.14
ST300-479	3	2.790	70.87	3.060	77.72
ST300-480	3	3.000	76.20	3.270	83.06
ST300-481	3	3.210	81.53	3.480	88.39
ST350-482	3-1/2	3.420	86.67	3.690	93.73
ST350-483	3-1/2	3.610	91.69	3.870	98.30
ST400-484	4	3.810	96.77	4.030	102.36
ST400-485	4	3.965	100.71	4.185	106.30
ST400-486	4	4.120	104.65	4.340	110.24

Crouse Hinds

NPT Thread Size	Armor OD Range (Inch)	Non-Hazardous Part No.	Hazardous Part No.
1/2	.440 to .650	TMC165	TMCX165*
3/4	.600 to .850	TMC285	TMCX285*
1	.800 to 1.120	TMC3112	TMCX3112*
1-1/4	1.100 to 1.400	TMC4140	TMCX4140*
1-1/2	1.330 to 1.610	TMC5161	TMCX5161*
2	1.570 to 2.060	TMC6206	TMCX6206
2-1/2	1.930 to 2.470	TMC7247	TMCX7247*
3	2.450 to 3.020	TMC8302	TMCX8302
3-1/2	2.950 to 3.520	TMC9352	TMCX9352
4	3.500 to 4.020	TMC10402	TMCX10402

*TMCX Catalog numbers listed are suitable for use with Type TC tray cable in hazardous locations when installed in accordance with NEC Articles 501-5(e) and 502-5. TMCX series is not suitable for use in Class III locations when used with tray cable.

Hawke Size Ref.	Standard Seal 1348 Diameter				Alternative Seal 1498 Diameter				NPT Size
	Minimum		Maximum		Minimum		Maximum		
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	
711-A	.590	14.99	.820	20.83	.470	11.94	.610	15.49	1/2
711-B	.790	20.07	.060	26.92	.630	16.00	.840	21.34	3/4
711-C	.930	23.62	1.310	33.27	.830	21.08	1.090	27.69	1
711-C2	1.260	32.00	1.690	42.93	1.100	27.94	1.340	34.04	1-1/4
711-D	1.690	42.93	2.060	52.32	1.300	33.02	1.610	40.89	2
711-E	2.050	52.07	2.560	65.02	1.810	45.97	2.160	54.86	2-1/2
711-F	2.560	65.02	3.070	77.98	2.240	56.90	2.640	67.06	3
711-H	2.990	75.95	3.520	89.41	Special Order				3-1/2
711-J	3.500	88.90	4.110	104.39	Special Order				4

Adalet—PLM

Part No.	Diameter Over Jacket				Conduit Size
	Minimum		Maximum		
	Inch	mm	Inch	mm	
PS/PSX 45-05	.350	8.89	.450	11.43	1/2
PS/PSX 55-05	.450	11.43	.550	13.97	1/2
PS/PSX 65-05	.550	13.97	.650	16.51	1/2
PS/PSX 75-05	.650	16.51	.750	19.05	1/2
PS/PSX 85-05	.750	19.05	.850	21.59	1/2
PS/PSX 95-05	.850	21.59	.950	24.13	1/2
PS/PSX 99-07	.850	21.59	.990	25.15	3/4
PS/PSX 107-07	.920	23.37	1.070	27.18	3/4
PS/PSX 113-07	.980	24.89	1.130	28.70	3/4
PS/PSX 121-07	1.070	27.18	1.210	30.73	3/4
PS/PSX 112-10	1.000	25.40	1.120	28.45	1
PS/PSX 125-10	1.120	28.45	1.250	31.25	1
PS/PSX 138-10	1.220	30.99	1.380	35.05	1
PS/PSX 138-12	1.280	32.51	1.380	35.05	1-1/4
PS/PSX 156-12	1.380	35.05	1.560	39.62	1-1/4
PS/PSX 174-12	1.560	39.62	1.740	44.20	1-1/4
PS/PSX 188-12	1.740	44.20	1.880	47.75	1-1/4
PS/PSX 174-15	1.600	40.64	1.740	44.20	1-1/2
PS/PSX 188-15	1.740	44.20	1.880	47.75	1-1/2
PS/PSX 200-15	1.880	47.75	2.000	50.80	1-1/2
PS/PSX 218-15	2.000	50.80	2.180	55.37	1-1/2
PS/PSX 219-20	2.050	52.07	2.190	55.63	2
PS/PSX 236-20	2.190	55.63	2.360	59.94	2
PS/PSX 247-20	2.350	59.69	2.470	62.74	2
PS/PSX 261-20	2.470	62.74	2.610	66.29	2
PS/PSX 263-25	2.460	62.48	2.630	66.80	2-1/2
PS/PSX 280-25	2.620	66.55	2.800	71.12	2-1/2
PS/PSX 296-25	2.800	71.12	2.960	75.18	2-1/2
PS/PSX 297-30	2.800	71.12	2.970	75.44	3
PS/PSX 311-30	2.950	74.93	3.110	78.99	3
PS/PSX 327-30	3.100	78.74	3.270	83.06	3
PS/PSX 343-30	3.260	82.80	3.430	87.12	3
PS/PSX 359-30	3.420	86.87	3.590	91.19	3
PS/PSX 375-35	3.520	89.41	3.750	95.25	3-1/2
PS/PSX 392-35	3.750	95.25	3.920	99.57	3-1/2
PS/PSX 412-35	3.900	99.06	4.120	104.65	3-1/2
PS/PSX 423-40	4.050	102.87	4.230	107.44	4
PS/PSX 437-40	4.200	106.68	4.370	111.00	4
PS/PSX 451-40	4.340	110.24	4.510	114.55	4
PS/PSX 462-40	4.430	112.52	4.620	117.35	4

**Use PS for non-hazardous locations and PSX for hazardous locations.



Technical Information

LSZH Jacketed Cables and Hazardous Locations Reference

Approvals and Standards/Performance Data for Low-Smoke, Zero-Halogen Jacketed Cable

XLP Insulation

Physical: (per UL-44)			
Tensile (min)	1500 psi	Deformation (max)	3.35
Elongation (min)	150%	LOI	27

	Haloarrest®	HaloarrestXLink-1	HaloarrestXLink-2
Physical			
Tensile (min)	1500 psi	1500 psi	1500 psi
Elongation (min)	100%	150%	150%
Tear Resistance	74 lbs/inch	—	—
LOI	38	39	45
Halogen Content			
IEC 754-1	0%	0%	0%
BS6425	0%	—	—
MIL-C-24643	<0.2%	—	—
NBS Smoke Chamber			
Flaming Mode	141 D _m corrected typical	164 D _m corrected typical	—
Smoldering Mode	311 D _m corrected typical	417 D _m corrected typical	—
Acid Gas			
IEC 754-2	4.3 pH, 28 µS/cm	4.9 pH, 0.7 µS/cm	<4.5 pH, 0.4 µS/cm
VDE 0472 Part 813	4.3 pH, 27 µS/cm	—	—
Toxicity Index			
NES 713	1	4.6	—
EN50305-2	—	—	2

Hazardous Locations Cable Reference

Article 500

Class I Division 1 Hazards

- Locations where flammable gases or vapors may exist under normal operating conditions, under frequent repair or maintenance operations, or where breakdown or faulty operation of process equipment might also cause simultaneous failure of electrical equipment.
- Use conduit or MI cable with approved termination fittings.

Class I Division 2 Hazards

- Locations where flammable gases, vapors or volatile liquids are handled either in a closed system, or confined within suitable enclosures, or where hazardous concentrations are normally prevented by positive mechanical ventilation. Areas adjacent to Division 1 areas belong in Division 2.
- Use PLTC, ITC, TC, MC, MV, MI with approved termination fittings.

Class II Division 1

- Locations where combustible dusts exist under normal conditions.
- Use conduit or MI with approved termination fittings.

Class II Division 2

- Locations where combustible dusts exist under abnormal conditions.
- Use conduit or PLTC, ITC, TC, MC with ventilated channel cable trays.
- Use conduit or MC, MI with approved termination fittings.

Class III Division 1

- Locations where easily ignitable fibers and flyings exist under normal conditions.
- Use conduit or MC, MI with approved termination fittings.

Class III Division 2

- Locations where easily ignitable fibers and flyings exist under abnormal conditions.
- Use conduit or MC, MI with approved termination fittings.

Low-Smoke, Zero-Halogen Jacketed Cable Specifications

600V, 90°C TC-LC NEC 340/UL 1277 & 1685

Instrumentation

- 18 to 12 AWG, BC or TC
- 90°C XLP insulation
- UL 44 XHHW-2 – 90°C dry/wet
- Shielded or unshielded
- Haloarrest® jacket

Control or Power

- 14 to 4/0 AWG, BC or TC
- 90°C XLP insulation
- UL 44 XHHW-2 – 90°C dry/wet
- Shielded or unshielded
- Haloarrest jacket

Article 504

Intrinsically Safe

- Equipment and wiring that are incapable of releasing sufficient electrical energy under normal or abnormal conditions to cause ignition of a specific hazardous atmospheric mixture in its most easily ignited concentration.
- Use CL3, CL2, PLTC, TC or CM cable, colored light blue, with approved sealing and separation.

Hazardous Location Cable Reference per Canadian Electrical Code CEC Section 18

All Armored cables printed "HL" per CSA C22.2 #174 are rated for all Hazardous Location Classes and Divisions (i.e., Class 1, Div. 1).

All Tray Cables printed "TC" per CSA C22.2 #230 are rated for all Hazardous Location Classes and Division 2 or lower. (i.e., Class 1, Div. 2 or lower).

Technical Information

UL Approved Insulation/Jacketing Options

UL Listed for MC and TC			
Insulation/Jacket	Max. Temp Rating		Flame Tests
	Wet	Dry	
PVC-Nylon/PVC (THHN or THWN) 14 AWG & larger	75°C	90°C	UL 1685 FT4/ IEEE 1202/383 ICEA T-29-520
PVC-Nylon/PVC (TFN or TFFN) 16 & 18 AWG	75°C	90°C	UL 1685 FT4/ IEEE 1202/383 ICEA T-29-520
XLP/PVC or CPE (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/ IEEE 1202/383 VW-1 rated singles ICEA T-29-520
XLP/PVC or CPE (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/ IEEE 1202/383 VW-1 rated singles ICEA T-29-520
FRPO/PVC 18 AWG & larger	—	75°C	UL 1685
FRPO/PVC	75°C	90°C	UL 1685
XLP/Haloarrest® (XHHW-2) 14 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520
XLP/Haloarrest (RFH-2) 16 & 18 AWG	75°C	75°C	UL 1685 FT4/IEEE 1202/383 ICEA T-29-520
XLP/HaloarrestXLink™-1 (XHHW-2) 18 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles
XLP/HaloarrestXLink-2 (XHHW-2) 18 AWG & larger	90°C	90°C	UL 1685 FT4/IEEE 1202/383 VW-1 rated singles
FEP/PVC	90°C	90°C	UL 1685

UL Listed for PLTC	
Insulation/Jacket	Max. Temp Rating
XLP/PVC	90°C
XLP/CPE	90°C
PVC/PVC	105°C
PVC/CPE	105°C
PE/PVC	75°C
FPE/PVC	75°C
XLP/Haloarrest	90°C
FEP/FEP	200°C

Abbreviations Key	
CPE	Chlorinated Polyethylene
FEP	Fluorinated Ethylene-propylene
FPE	Foam Polyethylene
FRPO	Flame-Retardant Polyolefin
PE	Polyethylene
PVC	Polyvinyl Chloride Nylon insulated singles are type THHN or THWN for conductors 14 AWG or larger. Conductor sizes 16 and 18 AWG are Type TFN or TFFN singles.
XLP	Cross-Linked Poly Cross-Linked Poly (XLP) insulated singles are type XHHW-2 for conductors 14 AWG or larger. Conductor sizes 16 and 18 AWG are RFH-2.

Vertical Tray Flame Test Comparison

Test	UL 1685 (UL 1581)	FT4/IEEE 1202/ IEEE 383-2003	IEEE 383-1974	IEC 323-3	ICEA T-29-520
Flame Test Chamber	Vertical Tray	Vertical Tray	Vertical Tray	Vertical Tray	Vertical Tray
Burner Type	Ribbon gas burner	Ribbon gas burner	Ribbon gas burner	Ribbon gas burner	Ribbon gas burner
Theoretical Heat Input	70,000 BTU/hr	70,000 BTU/hr	70,000 BTU/hr	70,000 BTU/hr	210,000 BTU/hr
Burner Positioning	horizontal 3" from samples 18" from tray base	20° up from horizontal 2.95" from cable surface 11.8" above floor	horizontal 3" from samples 18" above tray bottom	horizontal 2.95" from cable surface 23.6" above floor	horizontal 8-1/4" from cable surface 12-1/4" above tray base
Tray Dimensions	8' length, 12" width, 3" side flanges	9.84' length, 11.81" width, 2.85" side flanges	8' length, 12" width, 3" side flanges	11.5' length, 19.7" width, side flanges: none	8' length, 12" width, 3" side flanges
Sample Spacing	1/2 cable diameter	1/2 cable diameter	1/2 cable diameter	lesser of 1/2 cable diameter and .78"	1/2 cable diameter
Duration of Flame Application	20 minutes	20 minutes	20 minutes	20 minutes	20 minutes
Mode of Failure	Cable blistering or charring has reached the top of the sample after the cable has self-extinguished.	Cable char has exceeded a length of 4.92'.	Cable blistering or charring has reached the top of the sample after the cable has self-extinguished.	Cable charring has reached a height of 98.4" above the bottom of the burner.	Cable blistering or charring has reached the top of the sample after the cable has self-extinguished.



Hook-Up and Lead Wire

Table of Contents

Hook-Up & Lead Wire	Page No.
Introduction: UL Style & CSA Type Listings	128
PVC	130
PVC Wire Dispenser Kits	134
GreenChoice™ PPO	135
TFE	136
EPDM	138
XL-DUR®	141
CSPE	143
Neoprene	144
Silicone Rubber	145
Mercury Switch Wire	147
High-Voltage Leads	148
Test Prod Wire	149
Magnet Wire	150
Shielding and Bonding Cable	151
Direct Burial Cable	151
Bus Bar and Antenna Wire	151
Technical Information	152

Introduction

Belden® hook-up and lead wire products are manufactured in a variety of materials, sizes and designs to meet rigid industry and government specifications. Manufactured in-house, our hook-up and lead wire manufacturing process begins with copper rod.

Our rubber formulation and plastic mixing facilities give us complete control of the product from start to finish. As a result, consistent quality of these products is always assured.

Our hook-up and lead wire products can be used in a wealth of applications including interconnection circuits, internal wiring of computer and data processing equipment, appliances, lighting, motor leads, heating and cooling equipment, harness fabrication and automotive.

Most of our hook-up and lead wire constructions are available in a wide variety of colors and packages. Many of these are available off the shelf from distributors. If you have a new or unusual application or you cannot find hook-up or lead wire in this catalog section that meets your technical requirements, contact Technical Support at 1-800-BELDEN-1.

Index by UL Voltage and Temperature Rating

Hook-up & Lead Wire Section	Materials	Page No.
300V, 80°C	PVC	130
300V, 90°C	Neoprene	144
300V, 105°C	Chlorosulfonated Polyethylene (CSPE)	141
	XL-DUR®	139
300V, 200°C	TFE	135
600V, 90°C	Neoprene	144
	SIS	140
600V, 105°C	CSPE	141
	PPO	143
	PVC	131
600V, 125°C	EPDM	137
	XL-DUR	138
600V, 150°C	EPDM	137
	Silicone Rubber, Braidless	145
	Silicone Rubber, Glass Braid	146
	Silicone Rubber Mercury Switch Wire	147
	XL-DUR	140
600V, 200°C	Silicone Rubber, Braidless	145
	Silicone Rubber, Glass Braid	147
5000V	CSPE	142
7500V, 150°C	EPDM	138

Introduction *(continued)*

CSPE and Neoprene Constructions

These constructions may require a special topcoat to facilitate printing by customers. Minimum order is 5000 feet per AWG. Please order the standard item and specify "Top-Coated" and specify color. Orders must be in multiples of standard packages.

Price and delivery information is available upon request.

Manufacturer's Identification

Identification of the hook-up and lead wire is provided by our UL and CSA file numbers or printed name on the wire jacket.

Manufacturer's Identification

UL/CSA	File Number	Style
UL	E-12683	1XXX, 2XXX, 3XXX, 4XXX, 5XXX
	E-53518	MTW
	E-6934	SF-1, SFF-1, SF-2, SFF-2
	E-3917	SIS
CSA	LL-7874	All Types

Appliance Wiring Material (AWM)

Appliance Wiring Material is Underwriter Laboratories, Inc.'s recognized covering of insulated wire and cable intended for internal wiring of appliances and equipment. Each construction satisfies the requirements for use in particular applications. Wiring materials recognized under this classification bear the "Underwriters' Appliance Wiring Material Label."

UL and CSA Type by Belden Series

UL Style*	CSA Type	Belden Series Number	Temperature Rating, °C	Page No.
1007	TR-64	328	80	132
1015	TEW	327, 99, 89	105	131, 132
1028	TEW	99, 89	105	132
1061	AWM	99	80	130
1180	—	830	200	135
1213	—	830	105	135
1283	TEW	99	105	132
1371	—	830	105	136
1569	TRSR-64	99	105	131
1855	—	—	80	149
3044	CL902	315	90	144
3046	CL903	315, 325	90	144
3048	CL902	315	90	144
3049	CL902	315	90	144
3069	SEWF-2	308	150	146
3070	SEWF-2	308	150	146
3071	SEW-2	324	200	147
3074	SEW-2	324	200	147
3075	SEW-2	324	200	147
3101	SEWF-2	308	150	146
3123	—	340	150	147
3125	SEW-2	308	200	147
3126	SEW-2	308	200	147
3135	—	334	200	145
3173	CL1251	356	125	139
3190	CL1052	349	105	142
3191	CL1052	344	105	141
3192	CL1052	344	105	141
3193	CL1052	344	105	141
3195	CL1251	356	125	139
3196	CL1251	356	125	139
3199	CL1054	357	105	139
3212	AWM	333	150	145
3213	AWM	333	150	145
3214	AWM	333	150	145
3239	—	—	80	148
3321	AWM	354	150	140
3340	CL1254	371	150	137
3374	CL1254	371	150	137
3436	CL1251	354	150	140
3484	AWM	372	125	147
3499	—	375	150	147
11028	—	391	105	143
SIS	—	310	90	140

CSPE = Chlorosulfonated Polyethylene



PVC**UL AWM Style 1061
300V, 80°C (UL & CSA)**

- Tinned Copper Conductors
- Semi-rigid PVC Insulation
- CSA AWM



Solid conductors suitable for wire wrap applications

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
9978	30	Solid	.030	.76	.010	.25
9987	30	7 x 38	.032	.81	.010	.25
9977	28	Solid	.033	.84	.010	.25
9986	28	7 x 36	.035	.89	.010	.25
9976	26	Solid	.036	.91	.010	.25
9985	26	7 x 34	.039	.99	.010	.25
9975	24	Solid	.040	1.02	.010	.25
9984	24	7 x 32	.044	1.12	.010	.25
9979	22	Solid	.047	1.19	.010	.25
9983	22	7 x 30	.050	1.27	.010	.25
9982	20	7 x 28	.057	1.45	.010	.25
9917	20	10 x 30	.056	1.42	.010	.25
9911	18	16 x 30	.067	1.70	.010	.25
9981	18	19 x 30	.066	1.68	.010	.25
9980	16	19 x 28	.078	1.98	.010	.25
9909	16	26 x 30	.080	2.03	.010	.25

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

PVC

**UL AWM Style 1007
300V, 80°C (UL)**

- Tinned Copper Conductors
- PVC Insulation
- VW-1



Rated 2500V peak for electronic circuits, and internal wiring of electronic and electrical equipment

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
9930	30	7 x 38	.044	1.12	.015	.38

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

**UL AWM Style 1007, 1569 • CSA Type TR-64, TRSR-64
Dual-Rated Wire • 300V, 80/105°C (UL) • 300V, 90/105°C (CSA)**

- Tinned Copper Conductors
- PVC Insulation
- VW-1



Rated 600V peak for electronic circuits, and internal wiring of electronic and electrical equipment

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
9928	28	7 x 36	.047	1.19	.015	.38
9926	26	7 x 34	.051	1.30	.015	.38
9923	24	7 x 32	.056	1.42	.015	.38
9921	22	7 x 30	.062	1.57	.015	.38
9919	20	7 x 28	.069	1.75	.015	.38
9920	20	10 x 30	.067	1.70	.015	.38
9918	18	16 x 30	.079	2.01	.015	.38
9916	16	26 x 30	.092	2.34	.015	.38
9989*	14	41 x 30	.110	2.79	.015	.38

*Not AWM Style 1007.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

**UL AWM Style 1007 • CSA Type TR-64
300V, 80°C (UL) • 300V, 90°C (CSA)**

- Uni-Strand® Tinned Copper Conductors
- PVC Insulation
- VW-1



Recommended Maximum Baking Cycles: 24 Hours @ 300°F (149°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
32822	22	7 x 30	.062	1.58	.015	.38
32820	20	7 x 28	.068	1.73	.015	.38

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

PVC

**UL AWM Style 1015 or 1230 • CSA Type TEW
600V, 105°C (UL & CSA)**



- Tinned Copper Conductors
- PVC Insulation
- UL Type MTW (except 9924)
- VW-1

Rated 2500V peak for electronic circuits, and internal wiring of electronic and electrical equipment

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
9924	24	7 x 32	.088	2.24	.030	.76
8920	22	7 x 30	.093	2.36	.030	.76
8919	20	10 x 30	.100	2.54	.030	.76
8918	18	16 x 30	.110	2.79	.030	.76
8915	18	Solid	.105	2.67	.030	.76
8917	16	26 x 30	.123	3.12	.030	.76
8916	14	41 x 30	.138	3.51	.030	.76
9912	12	65 x 30	.158	4.01	.030	.76
9910	10	65 x 28	.180	4.57	.030	.76
8910	10	105 x 30	.186	4.72	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

**UL AWM Style 1015 • CSA Type TEW
600V, 105°C (UL & CSA)**



- Uni-Strand Tinned Copper Conductors
- PVC Insulation
- VW-1

Recommended Maximum Baking Cycles: 48 Hours @ 275°F (135°C), 24 Hours @ 300°F (149°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
32722	22	7 x 30	.093	2.36	.030	.76
32720	20	7 x 28	.099	2.52	.030	.76
32718	18	7 x 26	.108	2.74	.032	.80

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

**UL AWM Style 1015, 1028 • CSA Type TEW
600V, 105°C (UL & CSA)**



- Tinned Copper Conductors
- PVC Insulation
- UL Type MTW
- VW-1

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
9908	8	84 x 27	.250	6.35	.045	1.14
8908	8	133 x 29	.262	6.65	.045	1.14

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

PVC

**UL AWM Style 1015, 1283 • CSA Type TEW
600V, 105°C (UL & CSA)**



- Tinned Copper Conductors
- PVC Insulation
- UL Type MTW
- VW-1

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
9906	6	133 x 27	.331	8.41	.060	1.52
9904	4	133 x 25	.392	9.96	.060	1.52

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

**Type MW, MIL-W-76C-PVC
1000V, 80°C (MIL)**



- Tinned Copper Conductors
- PVC Insulation, Medium Wall
- Flame and Ozone Resistant
- Inert to Most Chemicals, Oils, and Solvents

PVC insulation hook-up wire for internal wiring of electrical and electronic equipment)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
8538	24	Solid	.055	1.40	.017	0.43
8525	24	7 x 32	.058	1.47	.017	0.43
8530	22	Solid	.059	1.50	.017	0.43
8524	22	7 x 30	.064	1.63	.017	0.43
8529	20	Solid	.066	1.68	.017	0.43
8523	20	10 x 30	.070	1.78	.017	0.43
8522	18	16 x 30	.080	2.03	.017	0.43
8521	16	26 x 30	.098	2.49	.019	0.48
8520	14	41 x 30	.111	2.82	.018	0.46
8527	12	65 x 30	.128	3.25	.018	0.46

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

**Type B, MIL-W-16878/1-PVC
600V, 105°C (MIL)**



- Tinned Copper Conductors
- PVC Insulation

PVC insulation hook-up wire for internal wiring of meters, panels, and electrical or electronic equipment

Part No.	AWG (Stranding)	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
8597	28	7 x 36	.035	.89	.010	.035
8505	26	7 x 34	.039	.99	.010	.035
8504	24	7 x 32	.044	1.12	.010	.035
8503	22	7 x 30	.050	1.27	.010	.035
8502	20	7 x 28	.058	1.47	.010	.035
8501	18	7 x 26	.068	1.73	.010	.035
8500	16	19 x 29	.079	2.01	.010	.035

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Wire Dispenser Kits

Wire Dispenser Kits



- Tinned Copper Conductors
- PVC Insulation

Great for R & D labs, engineers, service personnel, and hobbyists

Part No.	No. of Spools	Wire Part No.	Temp Rating	AWG	Stranding	Spool Lengths	
						Feet	Meters
8816	8	8522	80°C	18	16 x 30	25	7.6
8824	8	8523	80°C	20	10 x 30		
8825	5	8502	105°C	20	7 x 28	100	30.4
9531	5	8524	80°C	22	7 x 30		
8800	Rack Only						

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

GreenChoice™ PPO


UL AWM Style 11028
600V, 105°C



- Stranded Tinned Copper Conductors
- Zero Halogen Polyphenylene Oxide (PPO) Insulation
- VW-1
- -40°C

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
39128	28	7 x 36	.039	0.99	.012	0.30
39126	26	7 x 34	.043	1.09	.012	0.30
39124	24	7 x 32	.048	1.22	.012	0.30
39122	22	7 x 30	.053	1.35	.012	0.30
39120	20	10 x 30	.061	1.55	.012	0.30
39118	18	16 x 30	.069	1.75	.012	0.30
39116	16	26 x 30	.083	2.11	.012	0.30
39114	14	41 x 30	.097	2.46	.012	0.30
39112	12	65 x 30	.111	2.82	.012	0.30
39110	10	105 x 30	.144	3.66	.012	0.30

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

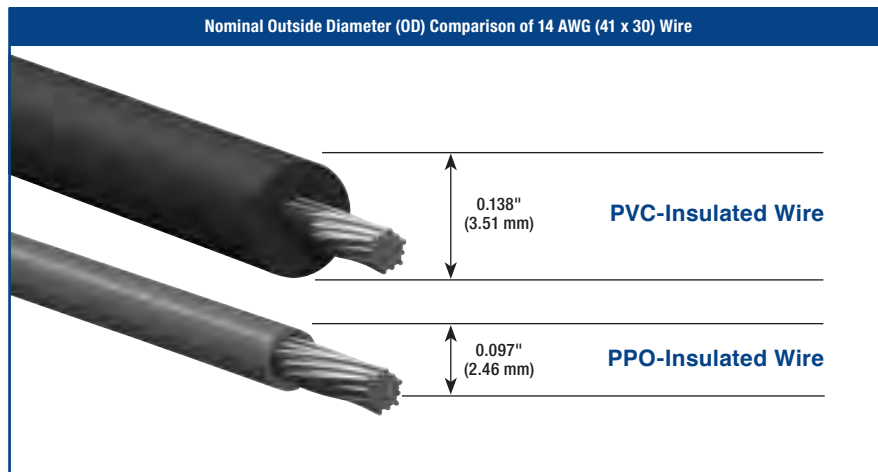

Polyphenylene oxide (PPO) insulation is nontoxic, nonpolluting, and recyclable. It has superior dielectric strength, and although it has thinner wall thickness than PVC, it provides a weight savings of up to 40%, 10x better abrasion and pinch resistance, and a temperature rating of -40°C to 105°C.

PPO = Polyphenylene Oxide • PVC = Polyvinyl Chloride

TFE

High Temperature

UL AWM Style 1180 • Type EE, MIL-W-16878/5 TFE
300V, 200°C (UL) • 1000V, 200°C (MIL)

- Stranded Silver-Coated Conductors
- Extruded TFE Insulation
- VW-1



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
83023*	24	19 x 36	.053	1.35	.015	.38
83025	22	7 x 30	.060	1.52	.015	.38
83026*	22	19 x 34	.059	1.50	.015	.38
83027*	20	19 x 32	.068	1.73	.015	.38
83028	20	7 x 28	.068	1.73	.015	.38
83029*	18	19 x 30	.077	1.96	.015	.38
83030*	16	19 x 29	.088	2.24	.015	.38

*Complies with MIL-W-16878 except stranding.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Style 1213 • Type E, MIL-W-16878/4 TFE
105°C (UL) • 600V, 200°C (MIL)

- Stranded Silver-Coated Conductors
- Extruded TFE Insulation
- VW-1



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
83000	30	7 x 38	.032	.81	.010	.25
83001*	28	7 x 36	.035	.89	.010	.25
83002	26	7 x 34	.039	.99	.010	.25
83003*	24	19 x 36	.043	1.09	.010	.25
83004	24	7 x 32	.043	1.09	.010	.25
83005	22	7 x 30	.049	1.24	.010	.25
83006*	22	19 x 34	.048	1.22	.010	.25
83007*	20	19 x 32	.056	1.42	.010	.25
83008	20	7 x 28	.058	1.47	.010	.25

*Complies with MIL-W-16878 except stranding.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

TFE = Tetrafluoroethylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

TFE

High Temperature

UL AWM Style 1371 • Type E, MIL-W-16878/4 TFE
105°C (UL) • 600V, 200°C (MIL)

- Stranded Silver-Coated Copper Conductors
- Extruded TFE Insulation
- VW-1



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
83009*	18	19 x 30	.068	1.73	.011	.28
83010*	16	19 x 29	.076	1.93	.012	.30

*Complies with MIL-W-16878 except stranding.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Style 1371 • Type ET, MIL-W-16878/6 TFE
105°C (UL) • 250V, 200°C (MIL)

- Stranded Silver-Coated Copper Conductors
- Extruded TFE Insulation
- VW-1



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
83041	32	7 x 40	.022	.56	.006	.15
83043	30	7 x 38	.024	.61	.006	.15
83045	28	7 x 36	.027	.69	.006	.15
83046	26	7 x 34	.031	.79	.006	.15
83047	24	7 x 32	.036	.91	.006	.15
83048	24	19 x 36	.036	.91	.006	.15
83049	22	7 x 30	.042	1.07	.006	.15
83050	22	19 x 34	.042	1.07	.006	.15

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

TFE = Tetrafluoroethylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

EPDM

High Temperature

UL AWM Style 3340, 3374
600V, 125°C Flex, 150°C No Flex
CSA Type CL1254

- Stranded Tinned Copper Conductors
- EPDM Insulation



Recommended for Class 130(B), 155(F) and also in some 180(H) systems

Recommended maximum baking cycles: 24 hours @ 350°F (177°C) • 4 hours @ 375°F (190°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
37118	18	16 x 30	.142	3.61	.045	1.14
37116	16	26 x 30	.154	3.91	.045	1.14
37114	14	41 x 30	.169	4.29	.045	1.14
37112	12	65 x 30	.190	4.83	.045	1.14
37110	10	65 x 28	.240	6.10	.060	1.52
37108*	8	84 x 27	.327	8.31	.080	2.03
37106*	6	84 x 25	.383	9.73	.080	2.03
37104*	4	105 x 24	.432	10.97	.080	2.03
37103*	3	133 x 24	.453	11.51	.080	2.03
37102*	2	163 x 24	.494	12.55	.080	2.03
37101*	1	210 x 24	.583	14.81	.095	2.41
37190*	1/0	262 x 24	.633	16.08	.095	2.41
37100*	2/0	504 x 26	.698	17.73	.095	2.41
37130*	3/0	630 x 26	.758	19.25	.095	2.41
37140*	4/0	805 x 26	.849	21.57	.095	2.41

*Separator over conductor.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

EPDM = Ethylene-Propylene Diene Elastomer

BELDEN

For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

EPDM

High Temperature

UL AWM Style 3484 • CSA Type AWM 600V, 125°C

- Stranded Tinned Copper Conductors
- EPDM Insulation
- Special Order



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
37222	22	7 x 30	.093	2.36	.030	.76
37220	20	10 x 30	.102	2.59	.030	.76
37218	18	16 x 30	.109	2.77	.030	.76
37216	16	26 x 30	.123	3.12	.030	.76
37214	14	41 x 30	.138	3.51	.030	.76
37212	12	65 x 30	.158	4.01	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

EPDM

High Voltage/High Temperature

UL AWM Style 3499 7500V, 150°C

- Stranded Tinned Copper Conductors
- EPDM Insulation



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
37508	8	84 x 27	.423	10.74	.125	3.18
37506	6	84 x 25	.470	11.94	.125	3.18
37504	4	105 x 24	.526	13.36	.125	3.18
37502	2	163 x 24	.581	14.76	.125	3.18
37501	1	210 x 24	.638	16.21	.125	3.18
37590	1/0	262 x 24	.688	17.48	.125	3.18
37500	2/0	504 x 26	.753	19.13	.125	3.18
37530	3/0	630 x 26	.813	20.65	.125	3.18
37540	4/0	805 x 26	.909	23.09	.125	3.18

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

EPDM = Ethylene-Propylene Diene Elastomer



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

XL-DUR®

XL-DUR insulation is a chemically cross-linked poly applied in a single extrusion, offering excellent thermal aging characteristics, moisture resistance, and solvent resistance. It provides an economic alternative to CSPE where extreme flexibility is not required. The insulation resists deformation when subjected to momentary high temperatures in customer assembly processes.

UL AWM Style 3199 • CSA Type CL1054 300V, 105°C

- Stranded Tinned Copper Conductors
- XL-DUR Insulation



Recommended maximum baking cycles: 24 hours @ 300°F (149°C), 12 hours @ 325°F (163°C), 8 hours @ 350°F (177°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
35722	22	7 x 30	.062	1.58	.015	.38
35720	20	10 x 30	.073	1.85	.015	.38
35718	18	19 x 30.5	.078	1.98	.015	.38
35716	16	19 x 29	.091	2.31	.015	.38

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Styles 3173, 3195, 3196 • CSA Type CL1251 600V, 125°C

- Stranded Tinned Copper Conductors
- XL-DUR Insulation



The 356 series is recommended for Class 130(B) as motor leads

Recommended maximum baking cycles: 24 hours @ 300°F (149°C), 12 hours @ 325°F (163°C), 8 hours @ 350°F (177°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
UL AWM Style 3173						
35622	22	7 x 30	.093	2.36	.030	.76
35620	20	10 x 30	.101	2.57	.030	.76
35618	18	16 x 30	.109	2.77	.030	.76
35616	16	26 x 30	.122	3.10	.030	.76
35614	14	41 x 30	.137	3.48	.030	.76
35612	12	65 x 30	.153	3.89	.030	.76
35610	10	65 x 28	.177	4.50	.030	.76
UL AWM Style 3195 • Separator Over Conductor						
35608*	8	133 x 29	.263	6.68	.045	1.14
UL AWM Style 3196 • Separator Over Conductor						
35606*	6	133 x 27	.333	8.46	.060	1.52

*Separator over conductor.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

XL-DUR® (High-Temperature) and SIS (Switchboard) Wire

UL AWM Style 3436 and 3321 • CSA Type CL1251 • CSA AWM
600V, 150°C

- Stranded Tinned Copper Conductors
- XL-DUR Insulation



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
35420	20	10 x 30	.102	2.59	.030	.76
35418	18	16 x 30	.110	2.79	.030	.76
35416	16	26 x 30	.123	3.12	.030	.76
35414	14	41 x 30	.138	3.51	.030	.76
35412	12	65 x 30	.153	3.89	.030	.76
35410	10	65 x 28	.177	4.50	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL Type SIS
600V, 150°C

- Stranded Tinned Copper Conductors
- VW-1 only on 31014, 31012, 31010
- XL-DUR Insulation



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
31014	14	41 x 30	.144	3.66	.030	.76
31012	12	65 x 30	.167	4.24	.030	.76
31010	10	65 x 28	.184	4.67	.030	.76
31014N	14	41 x 30	.144	3.66	.030	.76
31012N	12	65 x 30	.167	4.24	.030	.76
31010N	10	65 x 28	.184	4.67	.030	.76
31008N	8	133 x 29	.268	6.75	.045	1.14

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Chlorosulfonated Polyethylene

Chlorosulfonated polyethylene insulation has excellent heat resistance, color stability and electrical properties. CSPE is recommended for motor leads for Class 130(B) insulation systems. It may be considered as an alternative to silicone rubber to withstand 155°C varnish baking temperatures, but is not suitable for operating temperatures above Class 130(B).

UL AWM Style 3191, 3192, 3193 CSA Type CL1053 (18–12 AWG), CL1052 (10–4/0 AWG) 600V, 105°C • 300V, 105°C (CL1052)



- Stranded Tinned Copper Conductors
- CSPE Insulation

Recommended maximum baking cycles: 24 hours @ 300°F (149°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
UL AWM Style 3191 (600V, 105°C) • CSA Type CL1053						
34418	18	16 x 30	.142	3.61	.045	1.14
34416	16	26 x 30	1.55	3.94	.045	1.14
34414	14	41 x 30	1.70	4.32	.045	1.14
34412	12	65 x 30	1.90	4.83	.045	1.14
UL AWM Style 3191 • CSA Type CL1052*						
34410	10	65 x 28	.209	5.31	.045	1.14
UL AWM Style 3192 • CSA Type CL1052*						
34408	8	84 x 27	.290	7.37	.060	1.52
34406	6	84 x 25	.343	8.71	.060	1.52
34404	4	105 x 24	.399	10.14	.060	1.52
34403	3	133 x 24	.420	10.69	.060	1.52
34402	2	163 x 24	.445	11.53	.060	1.52
UL AWM Style 3193 • CSA Type CL1052*						
34401	1	210 x 24	.557	14.15	.080	2.03
34490	1/0	262 x 24	.607	15.42	.080	2.03
34400	2/0	504 x 26	.668	16.97	.080	2.03
34430	3/0	630 x 26	.732	18.59	.080	2.03
34440	4/0	805 x 26	.819	20.80	.080	2.03

*CSA requires additional wall thickness in sizes 10 AWG and larger to meet CL1053 requirements.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Style 3190 • CSA Type CL1052 300V, 105°C (UL & CSA)



- Stranded Tinned Copper Conductors
- CSPE Insulation

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
34922	22	7 x 30	.093	2.36	.030	.76
34920	20	10 x 30	.100	2.54	.030	.76
34918	18	16 x 30	.110	2.79	.030	.76
34916	16	26 x 30	.123	3.12	.030	.76
34914	14	41 x 30	.138	3.51	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

CSPE = Chlorosulfonated Polyethylene

For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Chlorosulfonated Polyethylene

5000V High Voltage



- Stranded Tinned Copper Conductors
- CSPE Insulation

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
36108	8	84 x 27	.480	12.19	.150	3.81
36106	6	84 x 25	.532	13.51	.150	3.81
36104	4	105 x 24	.588	14.94	.150	3.81
36102	2	163 x 24	.643	16.33	.150	3.81
36101	1	210 x 24	.700	17.78	.150	3.81
36190	1/0	262 x 24	.750	19.05	.150	3.81
36100	2/0	504 x 26	.815	20.70	.150	3.81
36140	4/0	805 x 26	.959	24.36	.150	3.81

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Neoprene

UL AWM Style 3044 • CSA Type CL902 300V, 90°C (UL & CSA)

- Stranded Tinned Copper Conductors
- Neoprene Insulation



Recommended maximum baking cycles: 24 hours @ 300°F (149°C), 8 hours @ 325°F (163°C), 15 minutes @ 450°F (232°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
31520	20	10 x 30	.100	2.54	.030	.76
31518	18	16 x 30	.109	2.77	.030	.76
31516	16	26 x 30	.122	3.10	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Style 3046, 3048 • CSA Type CL903 600V, 90°C (UL & CSA)

- Stranded Tinned Copper Conductors
- Neoprene Insulation
- Separator over conductor (8 AWG and Larger)



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
UL AWM Style 3046 • CSA Type CL903						
32518	18	16 x 30	.142	3.61	.045	1.14
32516	16	26 x 30	.155	3.94	.045	1.14
31514	14	41 x 30	.169	4.29	.045	1.14
31512	12	65 x 30	.190	4.83	.045	1.14
UL AWM Style 3046						
31510	10	65 x 28	.209	5.31	.045	1.14
UL AWM Style 3048						
31508	8	84 x 27	.285	7.24	.060	1.52
31506	6	84 x 25	.343	8.71	.060	1.52
31504	4	105 x 24	.399	10.14	.060	1.52
31502	2	163 x 24	.454	11.53	.060	1.52

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Silicone Rubber

Braidless

UL AWM Styles 3212, 3213, 3214 • CSA Type AWM 600V, 150°C (UL & CSA)



- Stranded Tinned Copper Conductors
- Silicone Rubber Insulation
- Separator over conductor (10 AWG and Larger)
- Easy and Clean Stripping
- Excellent Physical and Mechanical Strength

Recommended for applications requiring Class 155(F) or Class 180(H) materials and high-temperature applications in motors, lighting fixtures, clothes dryers, stoves, therapeutic and electronic devices.

Recommended maximum baking cycles: 24 hours @ 410°F (210°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
UL AWM Style 3212 • CSA Type AWM						
33322*	22	7 x 30	.125	3.18	.045	1.14
33320*	20	10 x 30	.132	3.53	.045	1.14
33318	18	16 x 30	.142	3.61	.045	1.14
33316	16	26 x 30	.155	3.94	.045	1.14
33314	14	41 x 30	.170	4.32	.045	1.14
33312	12	65 x 30	.190	4.83	.045	1.14
33310	10	65 x 28	.209	5.31	.045	1.14
UL AWM Style 3213 • CSA Type AWM						
33308	8	84 x 27	.283	7.19	.060	1.52
33306	6	84 x 25	.334	8.48	.060	1.52
33304	4	105 x 24	.390	9.91	.060	1.52
33302	2	163 x 24	.457	11.61	.060	1.52
UL AWM Style 3214 • CSA Type AWM						
33390	1/0	262 x 24	.594	15.09	.080	2.03

*Special Order Only.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Style 3135 600V, 200°C (UL)



- Stranded Tinned Copper Conductors
- Silicone Rubber Insulation
- Special Order Only

The 334 Series is for use only in totally enclosed systems.

Recommended maximum baking cycles: 24 hours @ 410°F (210°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
33418	18	7 x 26	.111	2.82	.030	.76
33416	16	7 x 24	.123	3.12	.030	.76
33414	14	7 x 22	.139	3.53	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Hook-Up and Lead Wire

Silicone Rubber

Glass Braid

UL AWM Styles 3069, 3070, 3101 • CSA Type SEWF-2
600V, 150°C (UL & CSA)



- Stranded Tinned Copper Conductors
- Glass Braided Silicone Rubber Insulation
- VW-1

Recommended maximum baking cycles: 24 hours @ 410°F (210°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		
			Inch	mm	Inch	mm	
UL AWM Style 3069 • CSA Type SEWF-2							
30820	20	10 x 30	.122	3.10	.030	.76	
UL AWM Style 3070 • CSA Type SEWF-2							
30818	18	16 x 30	.132	3.35	.030	.76	
30816	16	26 x 30	.145	3.68	.030	.76	
30814	14	41 x 30	.164	4.17	.030	.76	
30812	12	65 x 30	.186	4.72	.030	.76	
UL AWM Style 3101 • CSA Type SEWF-2							
30810	10	65 x 28	.239	6.07	.045	1.14	

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Silicone Rubber

Glass Braid and Mercury Switch

UL AWM Styles 3071, 3074, 3075, 3125, 3126 • CSA Type SEW-2 600V, 200°C (UL & CSA)



- Stranded Tinned Copper Conductors
- Glass Braided Silicone Rubber Insulation
- Separator over Conductors (8 AWG and Larger)
- VW-1
- Glass Braid Provides Additional Abrasion Resistance and Is Treated to Prevent Fraying

Recommended for high-temperature applications in motors, lighting fixtures, clothes dryers, stoves, therapeutic and electronic devices. These wires can be used with Class 130(B), 155(F) or 180(H) insulation systems.

Recommended maximum baking cycles: 24 hours @ 410°F (210°C)

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
UL AWM Style 3071 • CSA Type SEW-2						
32418	18	7 x 26	.133	3.38	.030	.76
32416	16	7 x 24	.145	3.68	.030	.76
32414	14	7 x 22	.167	4.24	.030	.76
UL AWM Style 3074 • CSA Type SEW-2						
32412	12	19 x 24.5	.190	4.83	.030	.76
UL AWM Style 3075 • CSA Type SEW-2						
32410	10	19 x 22.5	.238	6.05	.045	1.14
UL AWM Style 3125 • CSA Type SEW-2						
30808	8	54 x 25	.313	7.95	.060	1.52
30806	6	84 x 25	.368	9.35	.060	1.52
30804	4	105 x 24	.424	10.77	.060	1.52
30802	2	163 x 24	.496	12.60	.060	1.52
UL AWM Style 3126 • CSA Type SEW-2						
30801	1	210 x 24	.622	15.80	.080	2.03
30890	1/0	262 x 24	.670	17.02	.080	2.03
30800	2/0	504 x 26	.727	18.47	.080	2.03
30830	3/0	630 x 26	.795	20.19	.080	2.03
30840	4/0	266 x 21	.779	19.79	.080	2.03

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

UL AWM Style 3123 Mercury Switch • 600V, 150°C (UL)




- Stranded Tinned Copper Conductors
- Silicone Rubber Insulation

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm
34020	20	105 x 40	.110	2.79	.030	.76
34017	17	210 x 40	.118	3.00	.030	.76

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Hook-Up and Lead Wire

High-Voltage Leads



- Stranded Tinned Copper Conductors
- Polyethylene Insulation
- PVC Jacket, Red or Black
- Conductive Polyethylene (Korona-Guard) Over Inner Conductor Provides Uniform Distribution of Voltage Stresses
- 80°C

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Suggested Working Voltage (VDC)	Breakdown Voltage (VDC)
			Inch	mm	Inch	mm		
8868	22	7 x 30	.150	3.81	.044	1.12	24,000	48,000
8869	22	7 x 30	.120	3.05	.027	.69	17,000	35,000
9867*	20	7 x 28	.191	4.85	.046	1.17	30,000	60,000
8866	18	16 x 30	.208	5.28	.057	1.45	40,000	80,000

*UL AWM Style 3239 (30,000V DC, 80°C), VW-1.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Test Prod Wire



• Stranded Tinned Copper Conductors

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Suggested Working Voltage (VDC)	Breakdown Voltage (VDC)
			Inch	mm	Inch	mm		
5000V, 90°C • Rubber Insulation								
8899	18	65 x 36	.144	3.66	.045	1.14	5000	20,000
5000V, 80°C • Rubber Insulation • Manufactured for MIL-W-13169B								
8897	18	65 x 36	.144	3.66	.045	1.14	5000	20,000
5000V, 80°C • PVC Insulation • UL AWM Style 1855								
9899	18	65 x 36	.144	3.66	.048	1.22	5000	—
10,000V, 90°C • Rubber Insulation								
8898	18	65 x 36	.229	5.82	.088	2.24	10,000	29,000
1000V, 90°C • Rubber Insulation • Miniature Cable								
8890	24	45 x 40	.066	1.68	.019	.48	1000	10,000

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

PVC = Polyvinyl Chloride

Magnet Wire

Class 200 • One Pound Spool



- Bare Copper Conductor
- Cross-Linked Polyester Base Coat
- Amide-imide Polymer Top Coat
- 200°C
- LJ-W-1177/14
- MW 35-C (Heavy) or MW 74-C (Heavy)

Class 200 magnet wire offers exceptional ability to resist solvents and abuse in difficult windings

Part No.	AWG (Solid)	Approximate Length		Turns per Linear Inch	Turns per Square Inch
		Feet	Meters		
8085*	38	19,300	5882.7	206.0	42,436
8083	34	7860	2395.8	133.1	17,716
8081	30	3140	957.1	86.2	7430
8080	28	1990	606.6	69.4	4816
8079	26	1260	384.1	55.7	3102
8078	24	793	241.7	44.7	1998
8077	22	501	152.7	36.0	1296
8076	20	315	96.0	28.9	835
8075	18	199	60.7	23.2	538
8074	16	126	38.4	18.6	346
8073	14	80	24.4	14.9	222

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Single Beldsol™ Solderable • Half Pound Spool



- Bare Copper Conductor
- Polyurethane Base Coat
- Nylon Top Coat
- J-W-1177/9
- MW 28-C (Single)
- Rated by IEEE Tests for 270°F Usage
- Solders without Insulation Removal at 750°F
- Solvent Resistant


Part No.	AWG (Solid)	Approximate Length		Turns per Linear Inch	Turns per Square Inch
		Feet	Meters		
8058	36	6400	1950.7	180.0	32,400
8057	34	4060	1237.5	144.0	20,736
8056	32	2515	766.6	114.0	12,996
8055	30	1615	492.3	91.7	8409
8054	28	1020	310.9	73.8	5446
8053	26	645	196.6	59.0	3481
8052	24	404	123.1	46.9	2200
8051	22	254	77.4	37.5	1406
8050	20	160	48.8	29.9	894
8049	18	100	30.5	23.9	571

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Shielding and Bonding Cable, Direct Burial Cable, Bus Bar, and Antenna Wire

Shielding and Bonding Cable

- Braided Tinned Copper



Part No.	AWG	Stranding	Approximate Circular Area		Nominal ID Tubular		Recommended Max. Current (Amps)
			CMA	mm ²	Inch	mm	
8660	14.3	96 x 34	3800	1.92	.125	3.18	27.0
8668	13.3	120 x 34	4800	2.43	.172	4.37	36.0
8663	11.9	168 x 34	6700	3.40	.219	5.56	38.0
8661	11.3	192 x 34	7600	3.85	.203	5.16	46.0
8669	8.9	336 x 34	13300	6.74	.500	12.70	62.0
8662	6.6	576 x 34	22900	11.60	.781	19.84	80.0
8670	3.4	480 x 30	48000	24.32	.750 Flat Width	19.05 Flat Width	145.0

Note: Dimensions and wire gauge shown are approximate, due to pliable nature of braided cables.
 For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Direct Burial




- Stranded Tinned Copper Conductors
- High-Density Polyethylene Insulation, Black

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Suggested Working Voltage (VDC)
			Inch	mm	Inch	mm	
9438	14	104 x 34	.139	3.53	.032	.81	600

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Bus Bar Wire



- Solid Tinned Copper Conductors
- QQ-W-343G
- QQ-W-343S_S1T (on request)

Part No.	AWG	OD (Nom)		Circular Area	
		Inch	mm	CMA	mm ²
8025	30	.010	.26	102	.05
8024	28	.013	.33	164	.08
8023	26	.016	.41	262	.13
8022	24	.021	.52	424	.22
8021	22	.026	.65	650	.33
8020	20	.033	.83	1056	.54
8019	18	.041	1.03	1648	.84
8013	16	.052	1.31	2673	1.35
8012	14	.065	1.66	4251	2.15
8011	12	.083	2.11	6872	3.48

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Antenna Wire



- Stranded Copper-Covered Steel

Part No.	AWG	Stranding	OD (Nom)	
			Inch	mm
8000	14	7 x 22	.076	1.93

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Technical Information

Conductor and Insulation Materials

Tough Cables for Tough Environments

The technical information provided in this section has been expanded to include additional graphs and supplementary data as an aid in specifying the hook-up and lead wire best suited to the needs of a particular application. If you require additional technical information, contact Belden Technical Support at 1-800-BELDEN-1.

The tables on the following pages are offered as a guide to assist users in selecting the correct lead wire for their application.

Conductors

Uni-Strand®

Uni-Strand tinned copper conductor. In this type of construction, the bare copper wires are stranded, then tinned to coat the strands and also to fill in the interstices between strands. This allows for easier wire stripping with no re-twisting operation.

Insulation Materials

PVC

Vinyl plastic insulation is fast stripping, and resists oil, solvents, and ozone. The colors are bright and remain distinct after processing. Applications include motors, transformers, fluorescent ballasts and fixtures, switchboards, panels, controls, rectifiers and electronic circuits. Meets VW-1 Vertical Wire Flame Test in many cases.

TFE

TFE is a fluorinated thermoplastic with outstanding thermal, physical, and electrical properties. TFE is generally restricted to applications requiring its special characteristics because its basic resin and processing costs are relatively high.

Belden Teflon wire products are highly recommended for miniature cable applications because of their superior thermal and electrical properties. Teflon is especially suitable for internal wiring-soldering applications where insulation meltback is a specific problem. Belden wiring products insulated with Teflon are outstanding in their resistance to oil, oxidation, heat, sunlight and flame; and also in their ability to remain flexible at low temperatures. They have excellent resistance to ozone, water, alcohol, gasoline, acids, alkalis, aromatic hydrocarbons and solvents.

EPDM

EPDM (ethylene-propylene diene monomer) is a chemically cross-linked elastomer with excellent flexibility at high and low temperatures (+150°C to -60°C). It has good insulation and dielectric strength, as well as excellent abrasion resistance and mechanical properties. EPDM also has better cut-through resistance than silicone rubber, which it replaces in some applications.

EPDM is compatible with most varnishes. After the dip and bake cycle, however, the varnish tends to adhere to the insulation because EPDM, unlike some rubber insulations, does not exude oils or waxes.

As the lead wires are pulled apart for termination or flexed, the varnish cracks, sometimes tearing the insulation.

To help this problem, a stearic solution is applied to the lead wire during the manufacturing process. However, many varnishes may still bond to the insulation unless other special coatings are applied. (Other slip coats are available at additional cost.) Because most cleaning processes will remove these coatings from the EPDM lead wire, cleaning EPDM lead wire before using in the process is not recommended.

Due to the above, it is recommended that the compatibility between the individual lead wire size, the bake/varnish process and varnish used always be checked and, if possible, do not allow any varnish to extend beyond a point where the lead wire will be flexed or bent.

XL-DUR®

XL-DUR is a lead wire insulation using thermoset, chemically XLP. Because of its excellent physical and electrical properties, XL-DUR is highly desirable for a wide variety of applications.

CSPE

Chlorosulfonated polyethylene insulation has excellent heat resistance, color stability and electrical properties.

Neoprene

Neoprene insulation has good heat aging characteristics and is an excellent motor lead wire. It may be considered for use in hazardous locations and is being used in explosion-proof motors recognized by UL.

Silicone Rubber

Braidless silicone lead wire features easy and clean stripping without the problems associated with glass braid lead wire. It has excellent physical and mechanical strength properties. It is recommended for high-temperature applications in motors, lighting fixtures, clothes dryers, stoves, therapeutic, and electronic devices. Varnish compatibility should be checked before production. Some rigid varnishes may cause cracking when the wire is severely bent.

Silicone Rubber — Glass Braid

The silicone insulation strips clean and easy. The glass braid provides additional abrasion resistance and is treated to prevent fraying. Recommended for high-temperature applications in motors, lighting fixtures, clothes dryers, stoves, therapeutic and electronic devices.

PPO

Polyphenylene oxide (PPO) has superior dielectric properties to enable a thinner wall thickness and an outside diameter that is up to 45% smaller and significantly lighter than conventional PVC-insulated wire. PPO-based wires offer the same electrical properties as PVC wires with a voltage rating of 600V. Strong and flexible, PPO offers 10x the abrasion and pinch resistance of PVC. In addition, PPO insulation contains no halogens, phthalates, or heavy metals, allowing it to be burned or easily recycled.

Technical Information

Insulation Characteristics and Color Codes

How to Use

The choice of an appropriate conductor, with respect to current carrying capacity, usually depends on one or more factors which vary according to application. These factors include the temperature in which the lead wire operates, temperature rise of equipment, limitations of insulation, voltage drop, and location of wires as in free air or enclosed, such as formed by a compartment, tubing, or a bundle of wires.

For these reasons it is not practical to provide a general chart showing the current carrying capacity of lead wire for all conditions. Accordingly, the values shown in Table 3 are MAXIMUM for a single conductor in free air, based on ambient temperature of 30°C. For actual use temperatures above an ambient temperature of 30°C, reduce the maximum ampacity by use of correction factor in Table 5 to correct the values in Table 3 and Table 4.

Table 1: Insulation Characteristics

Insulation	Temperature Rating, °C	UL Voltage Rating (Volts)	Oil Resistance	Ozone Resistance	Abrasion	Flame Resistance
Neoprene	90	300/600	Good	Good	Good	Good
	80	300	Good-Excellent	Good-Excellent	Good	Excellent
PVC	105	600	Good-Excellent	Good-Excellent	Good	Excellent
	105	300/600	Good	Excellent	Good	Good
PPO	105	600	—	—	—	—
XL-DUR® XLP	105	300	Good	Good	Excellent	Fair-Good
	125	600	Good	Good	Excellent	Fair-Good
	150	600	Good	Good	Excellent	Fair-Good
EPDM	125	600	Fair-Poor	Good	Good	Fair
	150	600	Fair-Poor	Good	Good	Fair
Silicone Rubber	150	300	Fair	Good	Poor	Good
	200	600	Fair	Good	Poor	Good
Silicone Rubber Glass Braid	150	600	Fair	Excellent	Excellent	Good
	200	600	Fair	Excellent	Excellent	Good
TFE	150	300	Excellent	Excellent	Excellent	Excellent
	200	300	Excellent	Excellent	Excellent	Excellent
	260	300	Excellent	Excellent	Excellent	Excellent

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Table 2: Lead Wire Color Chart

Color No.	Color Combination	Color No.	Color Combination	Color No.	Color Combination
1	Brown	13	Dark Blue	25	White/Black/Yellow
2	Red	14	White/Black	26	White/Black/Blue
3	Orange	15	White/Red	27	White/Black/Brown
4	Yellow	16	White/Green	28	White/Black/Orange
5	Green	17	White/Yellow	29	White/Black/Gray
6	Light Blue	18	White/Blue	30	White/Black/Purple
7	Purple	19	White/Brown	189	Green/Yellow
8	Gray	20	White/Orange	620	Green/min 30% Yellow
9	White	21	White/Gray	876	Nickel Gray
10	Black	22	White/Purple	B02	Purple
11	Tan	23	White/Black/Red	—	—
12	Pink	24	White/Black/Green	—	—

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Technical Information

Current Carrying Capacity

Table 3: Lead Wire Current Carrying Capacity

AWG	90°C Neoprene, SIS	105°C Vinyl, GSPE, PPO	125°C XL-DUR®	150°C EPDM, XL-DUR®, Silicone	200°C Silicone
22	10	11	12	14	16
20	13	14	15	18	21
18	18	20	22	24	28
16	24	26	28	31	35
14	35	39	42	46	54
12	40	51	55	60	68
10	55	67	72	80	90
8	80	90	97	106	124
6	105	121	131	155	165
4	140	160	172	190	220
3	165	180	194	214	252
2	190	215	232	255	293
1	220	247	266	293	344
1/0	260	286	309	339	399
2/0	300	329	355	390	467
3/0	350	380	410	451	546
4/0	405	446	481	529	629

Values (amperes) shown in this table are maximum for a single conductor in free air with an assumed ambient room temperature of 30°C (86°F).

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Table 4: Current Carrying Capacity of 2 or 3 Conductors

AWG	90°C Neoprene, SIS	105°C Vinyl, GSPE, PPO	125°C XL-DUR	150°C EPDM, XL-DUR, Silicone	200°C Silicone
22	6	7	8	9	10
20	8	9	10	10	15
18	14	15	16	17	20
16	18	19	20	22	25
14	25	29	31	34	36
12	30	36	39	43	45
10	40	46	50	55	60
8	55	64	69	76	83
6	75	81	87	96	110
4	95	109	118	120	125
3	110	129	139	143	152
2	130	143	154	160	171
1	150	168	181	186	197
1/0	170	193	208	215	229
2/0	195	229	247	251	260
3/0	225	263	284	288	297
4/0	260	301	325	332	346

Current carrying capacity of not more than three (3) conductors in a raceway, conduit or cable.

The values (amperes) shown in this table are maximum at an assumed ambient room temperature of 30°C (86°F).

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Technical Information

Current Carrying Capacity

Table 5: Correction Factors for Tables 3 & 4

Ambient Temperature (°C)	Insulation Temperature Rating				
	90°C	105°C	125°C	150°C	200°C
31-35	.96	1.00	1.00	1.00	1.00
36-40	.91	1.00	1.00	1.00	1.00
41-45	.87	.93	.94	.95	.97
46-50	.82	.93	.94	.95	.97
51-55	.76	.85	.87	.90	.94
56-60	.71	.85	.87	.90	.94
61-70	.58	.76	.880	.85	.90
71-80	.41	.65	.73	.80	.87
81-90	—	.53	.64	.74	.83
91-100	—	.38	.54	.67	.79
101-120	—	—	.24	.52	.71
121-140	—	—	—	.30	.61
141-160	—	—	—	—	.50
161-180	—	—	—	—	.35
2/0	195	229	247	251	260
3/0	225	263	284	288	297
4/0	260	301	325	332	346

For ambient temperatures over 30°C, multiply the ampacities shown in Table 3 or Table 4 by the appropriate correction factor to determine the maximum allowable load current. For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Correction Factors for Table 4

Number of Conductors	Reduction Percentage	Number of Conductors	Reduction Percentage
4 thru 6	80%	21 thru 30	45%
7 thru 9	70%	31 thru 40	40%
10 thru 20	50%	41 and above	35%

For ambient temperatures over 30°C, multiply the ampacities shown in Table 3 or Table 4 by the appropriate correction factor to determine the maximum allowable load current. For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Technical Information

Temperature Classifications
Conductor Configurations

Table 6: Nominal Temperature Operating Ranges (°C)

-100°	-80°	-60°	-40°	-20°	0	100°	20°	40°	60°	80°	100°	120°	140°	160°	180°	200°	220°	240°			
				-30°	Neoprene						90°C										
				-30°	CSPE						105°C										
				-40°	PPO						105°C										
				-60°	EPDM						105°C										
				-75°	Silicone Braidless												200°C				
				-75°	Silicone Braided												200°C				
				-60°	XLP						105°C										
				-35°	PVC						105°C										
				-100°	TFE														260°C		

Table 7: Temperature Classification

Insulation System Class	Minimum Acceptable Lead Wire Temperature Rating	
	°C	°F
130 (B)	90	194
155 (F)	125	257
180 (H)	150	302
220 (R)	200	392

Systems of Insulating Materials—UL Standard 1446.

This is a guide intended for UL approved insulation systems connected to branch circuits of 600V or less.

Approval required by Underwriters Laboratories when using lead wire with a temperature rating more than 5°C under the system temperature rating.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com

Table 8: Conductor Configurations

Typical Application	American Wire Gage							
	12	14	16	18	20	22	24	26
Fixed Services Hook-Up Wire Cable in Raceway	19 x 25	Solid or 19 x 27	Solid or 19 x 29	Solid or 7 x 26 or 16 x 30	Solid or 7 x 28 or 10 x 30	Solid or 7 x 30	Solid or 7 x 32	Solid or 7 x 34
Fixed Services Hook-Up Wire Frequently Disturbed For Maintenance	65 x 30	19 x 27 or 41 x 30	19 x 29 or 26 x 30	16 x 30 or 41 x 34	7 x 28, 10 x 30, 19 x 32, or 26 x 34	7 x 30 or 19 x 34	7 x 34 or 10 x 34	7 x 34
Severe Flexing Microphone Test Products	165 x 34	104 x 34	65 x 34 or 104 x 36	41 x 34 or 65 x 36	26 x 34 or 42 x 36	19 x 34 or 26 x 36	19 x 36 or 45 x 40	7 x 34 or 10 x 36
Most Severe Duty Mercury Switches	259 x 36 (7 x 37 Rope Lay)*	168 x 36 (7 x 24 Rope Lay)*	105 x 36 (7 x 15 Rope Lay)*	63 x 36 (7 x 9 Rope Lay)*	105 x 40 (3 x 35 Rope Lay)*	(Consider Braid or Tinsel)		

Note: For a given AWG wire size (based on equal cross-sectional area of conductor), limpness and flex life are increased by use of a large number of fine strands. The finer stranding does result in higher costs.

*Rope Lay is several stranded groups cabled together. For example: 12 AWG, 259 x 36 is 7 cords each consisting of 37 strands of 36 AWG.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com



Technical Information

Packaging



Drums

Conductor is available in three drum pack sizes:

- The #15 Beldpak® is 15" high and 23" in diameter.
- The #31 Beldpak is 30.5" high and 23" in diameter.
- The #42 Beldpak (pictured) is 42" high and 23" in diameter.
- Price and delivery information is available upon request.

Packaging: Drums

OD of Wire		#15 Beldpak		#31 Beldpak		#42 Beldpak	
Inch	mm	1000	km	1000	km	1000	km
.070	1.78	35	10.7	70	21.3	85	25.9
.080	2.03	27	8.2	55	16.8	70	21.3
.090	2.29	21	6.4	43	13.1	55	16.8
.100	2.54	17	5.2	35	10.7	48	14.6
.110	2.79	12	3.7	25	7.6	40	12.2
.120	3.05	10	3.0	20	6.1	34	10.4
.130	3.30	9	2.7	18	5.5	30	9.1
.140	3.56	8	2.4	15	4.6	20	6.1
.150	3.81	7	2.1	14	4.3	18	5.5
.160	4.06	6	1.8	12	3.7	16	4.9
.170	4.32	5	1.5	10	3.0	14	4.3

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com



Reels

Reel dimensions will vary by size, determined by AWG of wire.

Special Orders

Orders for special packages must be placed for footage mentioned or for multiples for these quantities per color.

Packaging: Spools

OD of Wire		Quantity		Crate Reels	Head Diameter		Barrel Diameter		Height Transverse	
Inch	mm	1000'	km		Inch	mm	Inch	mm	Inch	mm
.080	2.03	10.0	3.05	1748	15-3/4	400	8	203	8	203
.090	2.29	8.0	2.24	1748	15-3/4	400	8	203	8	203
.100	2.54	6.5	1.98	1748	15-3/4	400	8	203	8	203
.110	2.79	5.0	1.52	1748	15-3/4	400	8	203	8	203
.120	3.05	6.0	1.83	1747	15-3/4	400	8	203	10-1/2	267
.130	3.30	5.0	1.52	1747	15-3/4	400	8	203	10-1/2	267
.140	3.56	6.0	1.83	1746	17-3/4	451	8	203	10-1/2	267
.150	3.81	5.0	1.52	1746	17-3/4	451	8	203	10-1/2	267
.160	4.06	4.5	1.37	1746	17-3/4	451	8	203	10-1/2	267
.170	4.32	7.0	2.13	1744	22	559	10	254	14-1/4	362
.180	4.57	6.0	1.83	1744	22	559	10	254	14-1/4	362
.190	4.83	5.5	1.68	1744	22	559	10	254	14-1/4	362
.200	5.08	5.0	1.52	1744	22	559	10	254	14-1/4	362
.250	6.35	5.0	1.52	1743	26	660	10	254	14-1/4	362
.300	7.62	3.5	1.07	1743	26	660	10	254	14-1/4	362
.350	8.89	2.5	.76	1743	26	660	10	254	14-1/4	362
.400	10.16	2.0	.61	1743	26	660	10	254	14-1/4	362
.450	11.43	1.5	.46	1743	26	660	10	254	14-1/4	362
.500	12.70	1.2	.37	1743	26	660	10	254	14-1/4	362
.550	13.97	1.0	.31	1743	26	660	10	254	14-1/4	362
.600	15.24	1.2	.37	1733	30	762	10	254	14-1/4	362

Crate Reel numbers are Belden's internal numbers. They are representative only to the extent of the dimensions shown. Weight of the wire may require another reel with dimensions identical to those shown. For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Conductors

Solid Copper Wire, American Wire Gage

Gage (AWG)	Nominal OD		Nominal Circular MIL Area	Nominal Weight (Inch per 1000')	Nominal Resistance @ 68°F ($\Omega/1000'$)
	Inches	mm			
10	.1019	2.60	10380.0	31.43	.9989
11	.0907	2.30	8234.0	24.92	1.260
12	.0808	2.05	6530.0	19.77	1.588
13	.0720	1.83	5178.0	15.68	2.003
14	.0641	1.63	4107.0	12.43	2.525
15	.0571	1.45	3260.0	9.858	3.184
16	.0508	1.29	2583.0	7.818	4.016
17	.0453	1.15	2050.0	6.200	5.064
18	.0403	1.02	1620.0	4.917	6.385
19	.0359	.912	1200.0	3.899	8.051
20	.0320	.813	1020.0	3.092	10.15
21	.0285	.724	812.1	2.452	12.80
22	.0253	.643	640.4	1.945	16.14
23	.0226	.574	511.5	1.542	20.36
24	.0201	.511	404.0	1.223	25.67
25	.0179	.455	320.4	.9699	32.37
26	.0159	.404	253.0	.7692	40.81
27	.0142	.361	201.5	.6100	51.47
28	.0126	.320	159.8	.4837	64.90
29	.0113	.287	126.7	.3836	81.83
30	.0100	.254	100.5	.3042	103.2
31	.0089	.226	79.7	.2413	130.1
32	.0080	.203	63.21	.1913	164.1
33	.0071	.180	50.13	.1517	206.9
34	.0063	.160	39.75	.1203	260.9
35	.0056	.142	31.52	.09542	331.0
36	.0050	.127	25.00	.07568	414.8
37	.0045	.114	19.83	.0613	512.1

Information from National Bureau of Standards Copper Wire Tables— Handbook 100.

Unparalleled Performance Belden is one of only a very few cable manufacturers to draw and anneal its own conductors. This is a time-consuming process, but it allows us to ensure signal integrity, as well as proper physical characteristics.

In addition, the standards under which we design and manufacture our fiber optic cabling are among the strictest in the industry.

The result is a comprehensive offering of products which give unparalleled performance and can satisfy your most demanding operating and environmental challenges.

For available colors and put-ups, see the on-line Belden Technical Data Sheet for the part number at www.belden.com



Multi-Conductor Control Cables

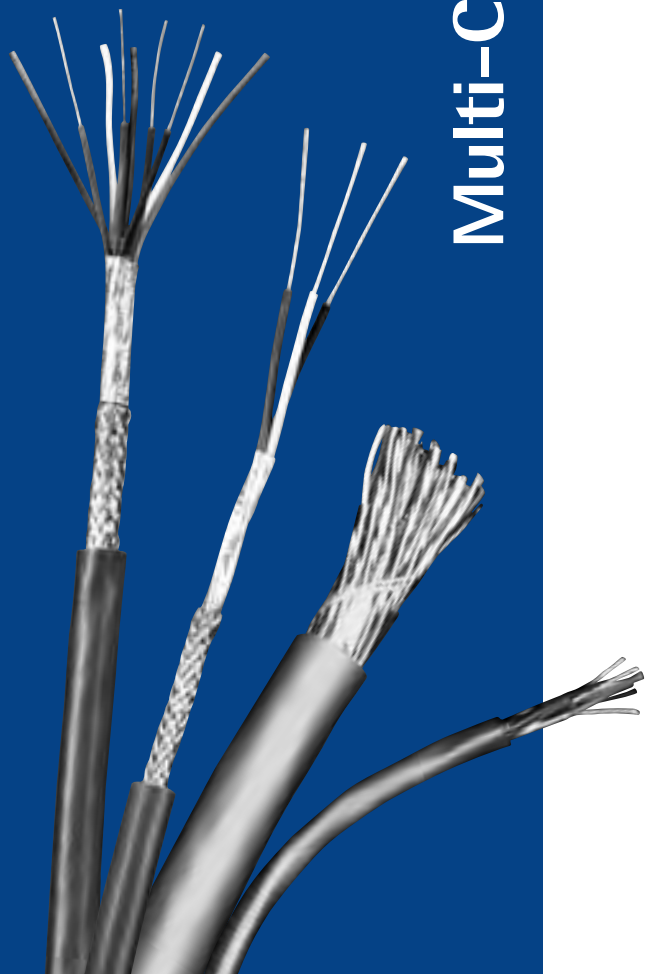


Table of Contents

Multi-Conductor Cables	Page No.
Introduction and Selection Guide	160
Audio, Control and Instrumentation Cable	161
Unshielded	161
Foil Shielded	163
Braid Shielded	165
Spiral Shielded	166
Braid Shielded/Unshielded	166
Plenum Rated	167
High Temperature Control and Instrumentation	169
Special Audio, Communication and Instrumentation Cable	172
Computer Cable	174
RS-232	174
RS-232, RS-423, and IEEE 488	175
Low-Capacitance RS-232	176
Low-Capacitance RS-232 and RS-423	177
Fire Alarm Power-Limited Fire Protective Signaling Circuit Cable	178
Circuit Integrity in Conduit (CIC) SAFE-T-Line® Cable	181
Circuit Integrity (CI) SAFE-T-Line® Cable	182
Computer, Instrumentation and Medical Electronics Cable	184
MIL-W-16878 (Type B) Conductors	185
Security Systems and Duplex Primary Wire	186
Antenna Rotor Cable	187
Rubber SO Power and Control Cable	187
GreenChoice™ LSZH Cable	188

Molded Cable Assemblies

For molded cable assemblies, see our Molded Cable Assemblies brochure, available on-line at www.belden.com.

Classic Multi-Conductor Cables

Belden's Classic multi-conductor line includes a select number of high-quality, high-reliability cables that meet or exceed UL standards and have been used worldwide for decades.

Belden multi-conductor products deliver low voltage analog data signals within enclosures, from controllers and I/Os to devices such as temperature and pressure sensors, relays, valves, meters, thermocouples, solenoids, actuators, contacts, push buttons, and alarms. They also are applicable for computers, communications, instrumentation, sound, control, audio, data transmission, and many more applications.

- Unsurpassed quality and reliability
- Robust designs that meet or exceed UL standards
- Proven performance in installations worldwide
- Broad range of AWG sizes, shielding options, and conductor counts
- Convenient put-up options
- Polyolefin insulations provide lower capacitance performance when compared to PVC insulated cables

Shielding

Belden meets the demand for highly effective shielding technology with innovative, EMI/RFI-protective foil and braid designs like Beldfoil®. Belden's patented Beldfoil shield is an aluminum/polyester foil construction that yields a lightweight, strong, flexible and thin shield that provides extra insulation and 100% shield coverage. Beldfoil is ideally suited for multiple-pair, individually shielded audio, communication, and data cables.

Product Consistency

By manufacturing our products in ISO-certified, state-of-the-art manufacturing facilities, Belden assures that quality is built into each and every product. Precise diameter control of insulation and jacket diameters and concentric wall thickness assures fast, reliable manufacturing in high-speed automated equipment, and ease of termination and assembly in the field.

Find the Right Product for Your Application

Belden Classic products are available from stock from Belden distributors. If the products above do not fit your application, Belden can also engineer specific constructions for your application.

Audio, Control, Instrumentation and Other Multi-Conductor Cables

AWG	Unshielded	Overall Beldfoil	Overall Foil/Braid	Overall Braid
24	—	—	[ACI]	[MIL-W-16878/4 (Type E)]
22	ACI [ACI] Fire Alarm	ACI [Special Hi-Temp ACI]	[ACI]	MIL-W-16878 (Type B) [MIL-W-16878/4 (Type E)]
20	ACI [Special Hi-Temp ACI]	ACI ACI (Direct Burial) [Special Hi-Temp ACI]	[ACI]	ACI MIL-W-16878 (Type B) [MIL-W-16878/4 (Type E)]
18	ACI [ACI] CI, CIC, Fire Alarm	ACI [ACI] CI, CIC, Fire Alarm	[ACI]	[MIL-W-16878/4 (Type E)]
16	ACI [Special Hi-Temp ACI] CI, CIC, Fire Alarm Rubber SO	ACI [ACI] [Special Hi-Temp ACI] CI, CIC, Fire Alarm	[ACI]	MIL-W-16878 (Type B) [MIL-W-16878/4 (Type E)]
14	ACI CI, CIC, Fire Alarm	CI, CIC, Fire Alarm	[Fire Alarm]	—
12	CI, CIC, Fire Alarm	CI, CIC, Fire Alarm	[Fire Alarm]	—

AIC = Audio, Control, and Instrumentation • CI = Circuit Integrity • CIC = Circuit Integrity in Conduit • [Brackets] = High-Temperature Cables.

Selection Guide

Shielded Multi-Conductor Computer Cables for RS-232 Applications

Specifications	Cable Series*			
	9925	9608	9533	9939
Conductor Size: (AWG)	28			
	24	✓	✓	✓
	22			✓
Page No.:	177	174	174	176
Insulation:	S-R PVC		✓	✓
	Datalene®†	✓		
Shield:	Overall Foil			✓
	Drain Wire	✓		✓
	Overall Foil/Braid	✓	✓	✓
	Braid Coverage	65%	65%	65%
Drain Wire Overall:	Yes	No	Yes	No
No. of Cond. Available:	3	✓	✓	✓
	4	✓	✓	✓
	5	✓	✓	✓
	6	✓	✓	✓
	7	✓	✓	✓
	8	✓	✓	✓
	9	✓	✓	✓
	10	✓	✓	✓
	15	✓	✓	✓
	20			✓
25	✓	✓	✓	✓
30			✓	
37	✓	✓		✓
40			✓	
50		✓	✓	✓
Capacitance** (pF/ft.)	12.0	30.0	30.0	35.0

*All cables are UL-listed.

**Capacitance may vary on some cables.


Multi-Conductor Computer Cable

AWG	Overall Beldfoil	Overall Foil/Braid	
	SR-PVC, PVC	SR-PVC	PE, PP
26	(AMP SDL)	—	—
24	(RS-232)	(RS-232)	(RS-232/423)
22	—	(RS-232)	—



Audio, Control and Instrumentation

600V, 80°C • Unshielded



- C(UL) FT4
- VW-1

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded (19 x 29) TC Conductors • PVC Insulation • Cabled • Chrome PVC Jacket

16 AWG • 19 x 29 • PVC/PVC

8620	4	Chart 2	.376	9.55	0.31	.79	.042	1.07
9620	5	Chart 2	.411	10.44				
8621	7	Chart 2	.458	11.63	0.31	.79	0.45	1.14
9721	8	Chart 2	.496	12.60				
9621	9	Chart 2	.533	13.54				
8622	12	Chart 2	.627	15.93	0.31	.79	.060	1.52
8623	15	Chart 2	.694	17.63				
8624	19	Chart 2	.740	18.80				
9622	25	Chart 2	.879	22.33				

14 AWG • 19 x 27 • PVC/PVC

8627	4	Chart 2	.490	12.45	.045	1.14	.045	1.14
9623	5	Chart 2	.573	14.55	.045	1.14	.060	1.62
8628	7	Chart 2	.623	15.82	.045	1.14	.060	1.62
8629	12	Chart 2	.824	20.93	.045	1.14	.065	1.65

Multi-Conductor Cable

TC = Tinned Copper • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation

300V, 60°C • Unshielded



- UL AWM Style


- NEC: CM
- CEC: CM
- NEC: MP (9794 Only)

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • Polyolefin/PVC

Solid BC Conductors • Polyolefin Insulation • Cabled • Rose or Gray PVC Jacket								
8795	2	Green, Red	.168	4.27				
8794	3	Green, Red, Yellow	.178	4.52	.018	.46	.022	.56
9794	4	Green, Red, Yellow, Black	.200	5.08				
1242A	4	Green, Red, Yellow, Black	.154	3.91	.018	.46	.025	.64

300V, 60°C • Unshielded



- PVC/PVC
- AWM Style

- NEC: CMG
- CEC: CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • PVC Insulation • Cabled • Chrome PVC Jacket

20 AWG • 7 x 28 • PVC/PVC

9444	4	Chart 1	.217	5.51				
9445	5	Chart 1	.239	6.07	.015	.38	.032	.81
9439	7	Chart 1	.260	6.60				
9455	9	Chart 1	.317	8.05				
9457	15	Chart 2R	.389	9.88	.015	.38	.035	.89

18 AWG • 19 x 30 • PVC/PVC

8489	4	Chart 1	.257	6.53	.017	.43	.032	.81
8465	5	Chart 1	.282	7.16	.017	.43	.033	.84
8467	7	Chart 1	.309	7.85	.017	.43		.94
8469	9	Chart 1	.364	9.25	.017	.43	.037	.94
8466	12	Chart 2R	.412	10.46	.017	.43	.040	1.02
8468	15	Chart 2R	.500	12.70	.017	.43		.500
8619	19	Chart 2R	.490	12.45	.017	.43	.045	.500
9626	25	Chart 2R	.612	15.54	.017	.43	.060	1.52

300V, 80°C • Unshielded



- Unjacketed
- AWM Style
- VW-1

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

16 AWG • PVC

Stranded (19 x 29) TC Conductors • PVC Insulation • Cabled								
9498	3	Orange, Black, Orange with Black Stripe	.243	6.17	.027	.69	—	—

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation

150V, 80°C • Unshielded



• UL AWM Style (Except 8442)


- NEC: CMG
- CEC: CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Cabled • Chrome PVC Jacket								
8442	2	Black, Red	.170	4.32	.016	.41	0.25	.64
8443	3	Black, Red, Green	.172	4.37				
8444	4	Chart 1	.185	4.70				
8445	5	Chart 1	.194	4.93				
9430	7	Chart 1	.214	5.44				
9421	8	Chart 1	.229	5.82	.011	.28	.032	.81
9423	9	Chart 1	.244	6.20				
8456	10	Chart 1	.264	6.71				
8457	12	Chart 1	.272	6.91				
8458	15	Chart 1	.315	8.00				
9431	20	Chart 1	.345	8.76				
8459	25	Chart 1	.387	9.83	.011	.28	.040	1.02
9432	30	Chart 1	.400	10.16				
9433	40	Chart 1	.455	11.56				
9434	50	Chart 1	.500	12.70	.011	.28	.045	1.14

300V, 60°C • Foil Shield



• AWM Style

- NEC: CM
- CEC: CM
- NEC: CL3 (8618)

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Stranded TC Conductors • Polyolefin Insulation • Cabled • Overall Beldfoil® Shielding • Stranded TC Drain Wire • Brown PVC Jacket

22 AWG • 7 x 30 • 22 AWG Drain Wire • Polyolefin/PVC

8771	3	Black, White, Clear	.199	5.05	.017	.43	.033	.84	41	134
------	---	---------------------	------	------	------	-----	------	-----	----	-----

20 AWG • 7 x 28 • 22 AWG Drain Wire • Polyolefin/PVC

8772	3	Black, White, Clear	.218	5.54	.017	.43	.033	.84	51	167
------	---	---------------------	------	------	------	-----	------	-----	----	-----

18 AWG • 16 x 30 • 20 AWG Drain Wire • Polyolefin/PVC

8770	3	Black, White, Clear	.246	6.25	.018	.46	.033	.84	48	157
------	---	---------------------	------	------	------	-----	------	-----	----	-----

16 AWG • 19 x 29 • 18 AWG Drain Wire • Polyolefin/PVC

8618	3	Black, White, Clear	.327	8.3	.032	.81	.031	.79	50	164
------	---	---------------------	------	-----	------	-----	------	-----	----	-----

*One conductor to other conductors connected to shield.

TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Audio, Control and Instrumentation

300V, 75°C • Foil Shield



• AWM Style

- NEC: CM, CL3
- CEC: CM

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

22 AWG • Polyolefin/PVC

Stranded (19 x 34) TC Conductors • Polyolefin Insulation • Cabled • Overall Beldfoil® Shielding • Three 23 AWG and One 25 AWG Stranded TC Drain Wires • White PVC Jacket

8729	4	Black, Red, Green, Clear	.257	6.53	.016	.41	.051	1.30	42	138
------	---	--------------------------	------	------	------	-----	------	------	----	-----

*One conductor to other conductors connected to shield.

300V, 80°C • Foil Shield



• AWM Style

- NEC: CMG
- CEC: CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m


18 AWG • SR-PVC/PVC

Stranded (19 x 30) TC Conductors • Semi-Rigid PVC Insulation • Cabled • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wires • Chrome PVC Jacket

9418	4	Red, Green, Black, White	.245	6.22	.010	.25	.035	.89	120	394
------	---	--------------------------	------	------	------	-----	------	-----	-----	-----

*One conductor to other conductors connected to shield.

300V, 80°C • Foil Shield



• AWM Style

- NEC: CMP
- CEC: CMP FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

18 AWG • FEP/Flamarrest

Stranded (19 x 30) • FEP Insulation • Cabled • Overall Beldfoil Shield • 20 AWG TC Drain Wire • Natural Flamarrest Jacket

82418	4	Black, White, Red, Green	.172	4.37	.007	.18	.015	.38	57	187
-------	---	--------------------------	------	------	------	-----	------	-----	----	-----

*One conductor to other conductors connected to shield.

300V, 90°C • Foil Shield



- NEC: CM
- CEC: CM

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

22 AWG • Polyolefin/PVC

Stranded (7 x 30) TC Conductors • Polyolefin Insulation • Cabled • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Brown PVC Jacket


9770	3	Black, Red, White	.145	3.68	.009	.23	.020	.51	60	197
------	---	-------------------	------	------	------	-----	------	-----	----	-----

*One conductor to other conductors connected to shield.

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation

200V, 105°C • Braid Shield




Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

30 AWG • Polyolefin/PVC

Stranded (7 x 38) TC Conductors • Polyolefin Insulation • Cabled • Central Textile Strength Member • Paper Separator • 95% TC Braid Shielding • Chrome PVC Jacket										
8643	3	Black, Red, White	.096	2.44	.006	.15	.014	.36	43	141

*One conductor to other conductors connected to shield.

200V, 105°C • Braid Shield




Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

22 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Cabled • 70% TC Braid Shielding • Chrome PVC Jacket										
8735	3	Black, Red, White	.202	5.13	.016	.41	.025	.64	60	197

*One conductor to other conductors connected to shield.

200V, 105°C • Braid Shield



• AWM Style

- NEC: CMG
- CEC: CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

20 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Cabled • 85% TC Braid Shielding • Chrome PVC Jacket										
9260	6	Chart 2R	.305	7.75	.017	.43	.032	.82	50	164
9261	12	Chart 2R	.396	10.06	.017	.43	.040	1.02	57	187

*One conductor to other conductors connected to shield.


TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Audio, Control and Instrumentation

450V, 80°C • Spiral Shield



- AWM Style
- VW-1

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

18 AWG • PVC/PVC

Stranded (7 x 26) TC Conductors • PVC Insulation • Cabled • 80% Spiral Wrap TC Shielding • Chrome PVC Jacket										
8791	3	Black, Red, White	.260	6.60	.022	.56	.028	.56	79	259

*One conductor to other conductors connected to shield.

300V, 80°C • Braid Shield/Unshielded



- AWM Style
- NEC: CM

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • PVC/PVC


Stranded (7 x 30) TC Conductors • PVC Insulation • Cabled • 80% TC Braid Shielding Over One Conductor • Chrome PVC Jacket										
8734	3 Total 1 Shielded 2 Unshielded	Black, Red, White	.194	4.93	.016	.41	.025	.64		

TC = Tinned Copper • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cable

Plenum-Rated

300V • Plenum • Unshielded



- Non-conduit
- Suitable for Outdoor and Direct Burial Applications
- NEC: CMP
- CEC: CMP FT6

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • FEP Insulation • Cabled • Red FEP Jacket

22 AWG • 7 x 30 • FEP/FEP

88442	2	Black, Red	.102	2.59	.007	.18	.012	.30
88444	4	Black, White, Red, Green	.121	3.07	.007	.18	.010	.25

18 AWG • 19 x 30 • FEP/FEP

88489	4	Black, White, Red, Green	.161	4.09	.007	.18	.009	.23
-------	---	--------------------------	------	------	------	-----	------	-----

Stranded TC Conductors • FEP Insulation • Cabled • Natural Flamarrest® Jacket


22 AWG • 7 x 30 • FEP/Flamarrest

82442	2	Black, Red	.102	2.59	.006	.15	.015	.38
82444	4	Black, White, Red, Green	.121	3.07				

18 AWG • 19 x 30 • FEP/Flamarrest

82489	4	Black, White, Red, Green	.170	4.32	.007	.18	.014	.36
-------	---	--------------------------	------	------	------	-----	------	-----

300V • Plenum • Foil Shield



- Non-conduit
- Suitable for Outdoor and Direct Burial Applications
- NEC: CMP
- CEC: CMP FT6

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

18 AWG • FEP/FEP

Stranded (19 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 20 AWG Stranded TC Drain Wires • Red FEP Jacket

88770	3	Black, White, Red	.155	3.94	.007	.18	.014	.36	96	315
89418	4	Black, White, Red, Green	.177	4.50	.007	.18	.014	.36	57	187

18 AWG • FEP/Flamarrest

Stranded (19 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 20 AWG Stranded TC Drain Wires • Natural Flamarrest Jacket

82418	4	Black, White, Red, Green	.176	4.47	.007	.18	.014	.36	63	207
-------	---	--------------------------	------	------	------	-----	------	-----	----	-----

*One conductor to other conductors connected to shield.

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Audio, Control and Instrumentation Cable

Plenum-Rated

300V • Plenum • Foil/Braid Shield



- Non-conduit
- Suitable for Outdoor and Direct Burial Applications
- -70°C to +200°C
- NEC: CMP
- CEC: CMP FT6

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Stranded TC Conductors • FEP Insulation • Cabled • Overall Beldfoil® + 85% TC Braid Shielding • Red FEP Jacket

24 AWG • 7 x 32 • FEP/FEP

83503	3	Chart 2	.135	3.43						
83504	4	Chart 2	.144	3.66						
83506	6	Chart 2	.165	4.19						
83509	9	Chart 2	.188	4.78	.006	.15	.014	.36	36	118
83512	12	Chart 2	.207	5.26						
83515	15	Chart 2	.227	5.77						

22 AWG • 7 x 30 • FEP/FEP

83552	2	Chart 2	.141	3.58						
83553	3	Chart 2	.148	3.76						
83554	4	Chart 2	.159	4.04	.006	.15	.014	.36		
83556	6	Chart 2	.183	4.65					40	132
83559	9	Chart 2	.209	5.31						
83562	12	Chart 2	.234	5.94	.006	.15	.015	.38		
83569	19	Chart 2	.269	6.83						

20 AWG • 7 x 28 • FEP/FEP

83602	2	Chart 2	.157	3.99						
83604	4	Chart 2	.178	4.52						
83606	6	Chart 2	.207	5.26	.006	.15	.014	.36	51	167
83609	9	Chart 2	.238	6.05						
83612	12	Chart 2	.265	6.73						

18 AWG • 19 x 30 • FEP/FEP

83652	2	Chart 2	.175	4.45						
83653	3	Chart 2	.184	4.67						
83654	4	Chart 2	.199	5.05	.007	.18	.014	.36		
83656	6	Chart 2	.234	5.94					60	197
83659	9	Chart 2	.293	7.44	.007	.18	.015	.38		
83662	12	Chart 2	.308	7.82						

16 AWG • 19 x 29 • FEP/FEP

83702	2	Chart 2	.196	4.98						
83703	3	Chart 2	.206	5.23						
83704	4	Chart 2	.223	5.66						
83706	6	Chart 2	.265	6.73						
83709	9	Chart 2	.307	7.80	.007	.18	.014	.36	63	207
83712	12	Chart 2	.344	8.74						
83715	15	Chart 2	.407	10.34						
83719	19	Chart 2	.403	10.24						

*One conductor to other conductors connected to shield.

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

High-Temperature Control and Instrumentation Cable

300V, 150°C • Unshielded

• VW-1



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded (7 x 28) TC Conductors • Cabled • ETFE Insulation • Clear ETFE Jacket

20 AWG • 7 x 28 • ETFE/ETFE

85220	2	Black, Red	.185	4.70	.015	.38	.020	.51
-------	---	------------	------	------	------	-----	------	-----

16 AWG • 19 x 29 • ETFE/ETFE

85221	2	Black, Red	.215	5.46	.014	.36	.020	.51
85102	2	Chart 2R	.211	5.36	.014	.36	.019	.48
85103	3	Chart 2R	.223	5.66	.014	.36		
85109	9	Chart 2R	.354	8.99	.014	.36	.024	.61

ETFE insulated and jacketed cables are particularly well suited for harsh environments due to outstanding mechanical toughness of the material, as well as its high-temperature and radiation resistant characteristics.

ETFE cables are used extensively in chemical plants, nuclear plants, and fossil fuel power plants. Typical applications are data recording, communication, telemetry, and monitoring pressure or material flow.

Multi-Conductor Cable

TC = Tinned Copper • ETFE = Ethylene/Tetrafluoroethylene

High-Temperature Control and Instrumentation

600V, 150°C • Silicone Rubber • Foil Shield



- AWM Style
- -70°C to 150°C
- VW-1
- 2999V DC Jacket Working Voltage (Shield to Ground)

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Stranded TC Conductors • FEP Insulation • Cabled • Noise-Reducing Tape • Overall Beldfoil® Shield • 22 AWG Stranded TC Drain Wire • Red Silicone Rubber Jacket

22 AWG • 7 x 30 • FEP/Silicone Rubber


83394	2	Black, White	.199	5.05	.015	.38	.030	.76	22	72
83395	3	Black, Red, White	.208	5.28	.015	.38	.031	.79	40	131
83396	4	Black, White, Red, Green	.217	5.51	.015	.38	.030	.76		

20 AWG • 7 x 28 • FEP/Silicone Rubber

83393	2	Black, Red	.242	6.15	.020	.51	.030	.76	22	72
-------	---	------------	------	------	------	-----	------	-----	----	----

*For 2-conductor cables, capacitance is measured conductor to conductor. For 3 conductors and higher, capacitance is measured as one conductor to other conductors connected to shield.

300V, 150°C • Foil Shield



- VW-1

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Stranded TC Conductors • ETFE Insulation • Cabled • Beldfoil Shielding • Stranded TC Drain Wire • Clear ETFE Jacket

20 AWG • 7 x 28 • ETFE/ETFE

85230	2	Black, Red	.182	4.62	.015	.38	.020	.51	31	102
85240	3	Black, Red, Green	.193	4.90	.015	.38	.020	.51	48	157

16 AWG • 19 x 29 • ETFE/ETFE

85231	2	Black, Red	.210	5.33	.014	.36	.020	.51	44	144
85241	3	Black, Red, Green	.223	5.66	.014	.36	.020	.51	48	157

*For 2-conductor cables, capacitance is measured conductor to conductor. For 3 conductors and higher, capacitance is measured as one conductor to other conductors connected to shield.

TC = Tinned Copper • ETFE = Ethylene/Tetrafluoroethylene • FEP = Fluorinated Ethylene Propylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com


High-Temperature Control and Instrumentation Cable

MIL-W16878/4 (Type E) Conductors

600V, 200°C • TFE • Braid Shield

- -65°C to 200°C
- VW-1

• MIL-W16878/4 (Type E) Conductors



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Stranded Silver-Plated Conductors • Extruded TFE Insulation • Cabled • 85% Silver-Plated Braid Shielding • White Tape-Wrapped TFE Jacket

26 AWG • 7 x 34 • TFE/TFE

83303E	1	White	.076	1.93	.010	.25	.010	.25	44.6	146
83317E	2	White, Black	.121	3.07	.010	.25	.011	.28	35.5	116
83332E	3	White, Black, Red	.127	3.23	.010	.25	.011	.28	31.5	103
83347E	4	White, Black, Red, Green	.137	3.48	.010	.25	.011	.28	30.5	100

24 AWG • 19 x 36 • TFE/TFE

83304E	1	White	.085	2.16	.010	.25	.010	.25	46	151
83318E	2	White, Black	.131	3.33	.010	.25	.011	.28	42.4	139
83333E	3	White, Black, Red	.137	3.48	.010	.25	.011	.28	36.8	121
83348E	4	White, Black, Red, Green	.149	3.79	.010	.25	.011	.28	36.8	121

22 AWG • 19 x 34 • TFE/TFE

83305E	1	White	.091	2.31	.010	.25	.010	.25	57.9	190
83319E	2	White, Black	.143	3.63	.010	.25	.011	.28	49.2	161
83334E	3	White, Black, Red	.150	3.81	.010	.25	.011	.28	45.7	150
83349E	4	White, Black, Red, Green	.163	4.14	.010	.25	.011	.28	45.7	150

20 AWG • 19 x 32 • TFE/TFE

83306E	1	White	.099	2.52	.010	.25	.011	.25	69	226
83320E	2	White, Black	.159	4.04	.010	.25	.010	.28	51	167
83335E	3	White, Black, Red	.168	4.27	.010	.25	.010	.28	51	167
83350E	4	White, Black, Red, Green	.183	4.65	.011	.28	.011	.25	51	167

18 AWG • 19 x 30 • TFE/TFE

83307E	1	White	.109	2.77	.011	.28	.010	.25	71.5	135
83321E	2	White, Black	.179	4.55	.011	.28	.011	.28	52.8	173
83336E	3	White, Black, Red	.189	4.80	.010	.25	.011	.28	52.8	173
83351E	4	White, Black, Red, Green	.207	5.26	.010	.25	.011	.28	52.8	173

16 AWG • 19 x 29 • TFE/TFE

83308E	1	White	.120	3.05	.011	.28	.011	.28	72.5	238
83322E	2	White, Black	.197	5.00	.011	.28	.011	.28	60	197
83337E	3	White, Black, Red	.209	5.31	.011	.28	.011	.28	53	174
83352E	4	White, Black, Red, Green	.229	5.82	.011	.28	.011	.28	50.8	167

*One conductor to other conductors connected to shield.

TFE = Tetrafluoroethylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com


Multi-Conductor Cable

Special Audio, Communication and Instrumentation Cables

300V, 80°C • Shielded • Triads

• VW-1

- NEC: CM
- NEC: Article 800
- CEC: CM



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m


22 AWG • Polyolefin/PVC

Stranded (7 x 30) TC Conductors • Polyolefin Insulation • White PVC Jacket Over Triads • Overall Beldfoil® Shielding • 22 AWG TC Drain Wires • Overall Chrome PVC Jacket										
9772	36 (12 Triads)	Triads: Black, Red, Green	.725	18.42	.009	.23	.060	1.52	67	220

*One conductor to other conductors connected to shield.

350V, 80°C • Foil Shielded Quads • Unshielded Conductors

• VW-1



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

24 AWG and 22 AWG • Polyolefin/PVC

Stranded (7 x 32 and 7 x 30) TC Conductors • Polyolefin Insulation (24 AWG), PVC Insulation (22 AWG) • Green Beldfoil Shield on One Quad, Red Beldfoil Shield on One Quad • 24 AWG Stranded TC Drain Wire • Chrome PVC Jacket										
8787	10 Total	Quad 1: Gray, White, Green, Blue Quad 2: Brown, Red, Yellow Orange Unshielded: Blue, White	.290	7.87	.012	.30	.030	.76		
	8 (24 AWG Shielded: 2 Quads) 2 (22 AWG Unshielded)				.016	.41				

TC = Tinned Copper • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Special Audio, Communication and Instrumentation Cables

300V, 60°C • Foil Shielded and Unshielded

• VW-1

• NEC: CM




Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Individually Beldfoil® Shielded Conductors • Tinned Cadmium Bronze Ribbon Drain Wire • Chrome PVC Jacket								
8788	5 Total 3 Shielded 2 Unshielded	Shielded: Black, Red, Green Unshielded: Yellow, Blue	.236	5.99	.016	.41	.028	.71

300V, 90°C • Foil Shielded and Unshielded

• NEC: CM
• NEC: Article 800
• CEC: CM



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

24 AWG and 22 AWG • PVC/PVC

Stranded (7 x 32 and 7 x 30) TC Conductors • PVC Insulation • Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Chrome PVC Jacket								
8786	6 Total 4 (24 AWG Shielded) 2 (22 AWG Unshielded)	Shielded: Black, Green, Red, Yellow Unshielded: White, Blue	.236	5.99	.016	.41	.028	.71


Multi-Conductor Cable

TC = Tinned Copper • PVC = Polyvinyl Chloride



Computer Cables for RS-232 Applications

300V, 80°C • Foil Shield



• AWM Style

- NEC: CMG
- CEC: CMG FT4


Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

24 AWG • SR-PVC/PVC

Stranded (7 x 32) TC Conductors • Semi-Rigid PVC Insulation • Cabled • Overall Beldfoil® Shielding • 28 AWG Stranded TC Dain Wire • Chrome PVC Jacket										
9533	3	Chart 1	.162	4.11						
9534	4	Chart 1	.184	4.67						
9535	5	Chart 1	.189	4.80						
9536	6	Chart 1	.209	5.31	.011	.28	.032	.81	65	213
9537	7	Chart 1	.209	5.31						
9538	8	Chart 1	.224	5.69						
9539	9	Chart 1	.244	6.20						
9540	10	Chart 1	.244	6.20						
9541	15	Chart 2R	.284	7.21	.011	.28	.032	.81		
9542	20	Chart 2R	.314	7.98					55	180
9543	25	Chart 2R	.339	8.61						
9544	30	Chart 2R	.380	9.65						
9545	40	Chart 2R	.406	10.31	.011	.28	.040	1.02		
9546	50	Chart 2R	.490	12.45	.011	.28	.045	1.14		

*One conductor to other conductors connected to shield.

300V, 80°C • Foil/Braid Shield



• AWM Style
• VW-1

- NEC: CMG
- CEC: CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

24 AWG • SR-PVC/PVC

Stranded (7 x 32) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil + 65% TC Braid Shielding • Chrome PVC Jacket										
9608	3	Chart 1	.190	4.83						
9609	4	Chart 1	.200	5.08	.011	.28	.035	.88	65	213
9610	5	Chart 1	.215	5.46						
9611	6	Chart 1	.225	5.72						
9612	7	Chart 1	.225	5.72						
9613	8	Chart 1	.240	6.10						
9614	9	Chart 1	.253	6.43	.011	.28	.035	.88		
9615	10	Chart 1	.270	6.86					55	180
9616	15	Chart 1	.300	7.62						
9617	25	Chart 1	.370	9.40	.011	.28	.037	.94		
9618	37	Chart 1	.411	10.43	.011	.28	.040	1.02		
9619	50	Chart 1	.485	12.32	.011	.28	.045	1.14		

*One conductor to other conductors connected to shield.


TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Computer Cables for RS-232, RS-423, and IEEE 488

300V, 80°C • Foil/Braid Shield



- AWM Style
- VW-1


- NEC: CL2
- CSA: AWM I B FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

28 AWG • SR-PVC/PVC

Stranded (7 x 36) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil® + 65% TC Braid Shielding • Chrome PVC Jacket								
9637	25	Chart 2R	.305	7.75	.010	.25	.035	.89

30V, 80°C • Foil/Braid Shield



- AWM Style
- VW-1

- NEC: CL2
- CSA: AWM I A FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

26 and 24 AWG • SR-PVC/PVC

Stranded (7 x 34 and 7 x 32) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil + 90% TC Braid Shielding • 26 AWG Stranded TC Drain Wire • Chrome PVC Jacket								
9641	23 Total 6 (26 AWG Pairs) 10 (26 AWG Cond.) 1 (24 AWG Cond.)	Chart 1	.350	8.89	.010	.25	.035	.89


TC = Tinned Copper • PVC = Polyvinyl Chloride

Low-Capacitance Computer Cables for RS-232 Applications

300V, 80°C • Low Capacitance • Foil/Braid Shield

• AWM Style

- NEC: CMG
- CEC: CMG FT4



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

22 AWG • SR-PVC/PVC

Stranded (7 x 30) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil® + 65% TC Braid Shielding • Chrome PVC Jacket										
9939	3	Chart 1	.202	5.13						
9940	4	Chart 1	.215	5.46	.011	.28	.035	.89	67	220
9941	5	Chart 1	.230	5.84						
9942	6	Chart 1	.245	6.22						
9943	7	Chart 1	.245	6.22						
9944	8	Chart 1	.264	6.71	.011	.28	.035	.89		
9945	9	Chart 1	.280	7.11						
9946	10	Chart 1	.300	7.62					63	207
9947	15	Chart 2R	.340	8.64						
9948	25	Chart 2R	.410	10.41						
9949	37	Chart 2R	.460	11.68	0.11	.28	.040	1.02		
9950	50	Chart 2R	.555	14.10	0.11	.28	.050	1.27		

*One conductor to other conductors connected to shield.

TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Low-Capacitance Computer Cables for RS-232 and RS-423 Applications

30V, 80°C • Low Capacitance • Foil/Braid Shield

• AWM Style

- NEC: CMG
- CEC: CMG FT4



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

24 AWG • Silicone Rubber/FR-Polyethylene

Stranded (7 x 32) TC Conductors • Datalene® Insulation • Overall Beldfoil® + 65% TC Braid Shielding • 24 AWG TC Drain Wire • Chrome PVC Jacket										
9925	3	Chart 1	.215	5.46						
9927	4	Chart 1	.230	5.84						
9929	5	Chart 1	.246	6.25						
9931	6	Chart 1	.265	6.73						
9932	7	Chart 1	.265	6.73	.015	.38	.035	.89		
9933	8	Chart 1	.280	7.11					22	72.2
9934	9	Chart 1	3.00	7.62						
9935	10	Chart 1	3.06	7.77						
9936	15	Chart 1	.350	8.89						
9937	25	Chart 1	.445	11.30	.015	.38	.045	1.14		
9938	37	Chart 1	.500	12.70						

*One conductor to other conductors connected to shield.

Datalene insulation features include a low dielectric constant and a low dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.

Multi-Conductor Cable


TC = Tinned Copper • PVC = Polyvinyl Chloride



Fire Alarm Power-Limited Fire Protective Signaling Circuit Cables

Subject 1424 (NEC Article 760, Type FPLR)

300V, 105°C • Unshielded



• AWM Style

- NEC: MPR, FPLR
- CEC: FAS 105 FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • PVC/PVC

Solid TC Conductors • PVC Insulation • Cabled • Black PVC Jacket								
9576	6	Black, White, Red, Green, Brown, Blue	.234	5.94	.013	.33	.039	.99

300V, 105°C • Unshielded



• AWM Style

- NEC: MPR, FPLR
- CEC: FAS 105 FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Solid BC Conductors • PVC Insulation • Cabled • Red PVC Jacket								
----------------------------------------------------------------	--	--	--	--	--	--	--	--

18 AWG • PVC/PVC

9571	2	Black, Red	.228	5.79	.017	.43	.037	.94
------	---	------------	------	------	------	-----	------	-----

16 AWG • PVC/PVC

9572	2	Black, Red	.238	6.05	0.16	.41	.036	.91
------	---	------------	------	------	------	-----	------	-----

14 AWG • PVC/PVC

9580	2	Black, Red	.303	7.70	.022	.56	.042	1.07
------	---	------------	------	------	------	-----	------	------

12 AWG • PVC/PVC

9582	2	Black, Red	.340	8.64	.022	.56	.042	1.07
------	---	------------	------	------	------	-----	------	------

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride


Fire Alarm Power-Limited Fire Protective Signaling Circuit Cables

Subject 1424 (NEC Article 760, Type FPLR)

300V, 105°C • Foil Shielded

• AWM Style

- NEC: MPR, FPLR
- CEC: FAS 105 FT4



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Solid BC Conductors • PVC Insulation • Cabled • Overall Beldfoil® Shielding • Red PVC Jacket

18 AWG • PVC/PVC

9574	2	Black, Red	.231	.587	.017	.43	.037	.94
9578	4	Black, Red, Yellow, Light Blue	.263	6.68				

16 AWG • PVC/PVC

9575	2	Black, Red	.241	6.12	.016	.41	.036	.91
9579	4	Black, Red, Yellow, Light Blue	.301	7.65				

14 AWG • PVC/PVC

9581	2	Black, Red	.306	7.77	.022	.56	.042	1.07
------	---	------------	------	------	------	-----	------	------

12 AWG • PVC/PVC

9583	2	Black, Red	.343	8.71	.022	.56	.042	1.07
------	---	------------	------	------	------	-----	------	------

BC = Bare Copper • PVC = Polyvinyl Chloride


Plenum-Rated Fire Alarm Power-Limited Fire Protective Control and Instrumentation Cables

Subject 1424 (NEC Article 760, Type FPLR)

300V, 200°C • Foil/Braid Shield •
Plenum

• AWM Style

• NEC: FPLR, CMP
• CEC: CMP FT6



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded TC Conductors • FEP Insulation • Cabled • Overall Beldfoil® + 85% TC Braid Shielding • Red FEP Jacket

14 AWG • 7 x 22 • FEP/FEP

83752	2	Black, White	.267	6.78				
83753	3	Black, White, Red	.284	7.21	.016	.41	.015	.38
83754	4	Black, White, Red, Green	.311	7.90				
83756	6	Black, White, Red, Green, Orange, Blue	.376	9.55	.016	.41	.017	.43

12 AWG • 7 x 20 • FEP/FEP

83802	2	Black, White	.303	7.70				
83803	3	Black, White, Red	.323	8.20	.016	.41	.015	.38
83804	4	Black, White, Red, Green	.359	9.12				
83806	6	Black, White, Red, Green, Orange, Blue	.430	10.92	.016	.41	.017	.43

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Circuit Integrity in Conduit (CIC) SAFE-T-Line® Cable

Commercial Application, Addressable Systems

300V, 105°C • Unshielded



- Riser Rated

- NEC: FRLR
- NEC Article 760
- UL: R22303 for use in FHIT.30

Part No.	Conductors	Stranding	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
				Inch	mm	Inch	mm	Inch	mm

Stranded or Solid BC Conductors • Ceramifiable Silicone Rubber • Red Flame-Retardant Polyethylene (LSZH) Jacket

16 AWG • Silicone Rubber/FR-Polyethylene

5200UZ	2	7 x 24	Black, Red	.37	9.40				
5220UZ	2	Solid	Black, Red	.35	8.89	.035	.89	.056	1.42

14 AWG • Silicone Rubber/FR-Polyethylene

5100UZ	2	7 x 22	Black, Red	.40	10.16				
5120UZ	2	Solid	Black, Red	.38	9.65	.035	.89	.056	1.42

12 AWG • Silicone Rubber/FR-Polyethylene

5000UZ	2	7 x 20	Black, Red	.37	9.40				
5020UZ	2	Solid	Black, Red	.42	10.67	.035	.89	.056	1.42

300V, 105°C • Foil Shielded



- Silicone Rubber/FR-Polyethylene
- Riser Rated

- NEC: FRLR
- NEC Article 760
- UL: R22303 for use in FHIT.30

Part No.	Conductors	Stranding	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
				Inch	mm	Inch	mm	Inch	mm

Solid or Stranded BC Conductors • Ceramifiable Silicone Rubber • Overall Beldfoil® Shield • TC Drain Wire • Red Flame-Retardant Polyethylene (LSZH) Jacket

16 AWG • Silicone Rubber/FR-Polyethylene

5200FZ	2	7 x 24	Black, Red	.37	9.40				
5220FZ	2	Solid	Black, Red	.36	9.14	.035	.89	.056	1.42
5222FZ	4	Solid	Black, Numbered	.41	10.41				

14 AWG • Silicone Rubber/FR-Polyethylene

5100FZ	2	7 x 22	Black, Red	.41	10.41				
5120FZ	2	Solid	Black, Red	.38	9.65	.035	.89	.056	1.42

12 AWG • Silicone Rubber/FR-Polyethylene

5000FZ	2	7 x 20	Black, Red	.44	11.18				
5020FZ	2	Solid	Black, Red	.42	10.67	.035	.89	.056	1.42
5022FZ	4	Solid	Black, Numbered	.48	12.19				

BC = Bare Copper • TC = Tinned Copper • LSZH = Low Smoke Zero Halogen

Circuit Integrity (CI) SAFE-T-Line® Cable

Commercial Application, Addressable Systems

300V, 105°C • Unshielded



• Riser Rated

- NEC: FRLR-CI
- NEC Article 760
- UL: R22303 for use in FHIT.30

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance (Nom)	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Solid BC Conductors • Ceramifiable Silicone Rubber Insulation • Red Flame-Retardant Polyethylene Jacket

18 AWG • Silicone Rubber/FR-Polyethylene

5320UM	2	Black, Red	.31	7.87						
5322UM	4	Black, Numbered	.35	8.89	.045	1.14	.034	.86	17	56
5324UM	6	Black, Numbered	.42	10.67						
5326UM	8	Black, Numbered	.45	11.43						

16 AWG • Silicone Rubber/FR-Polyethylene

5220UM	2	Black, Red	.33	8.38	.045	1.14	.034	.86	19	62
5222UM	4	Black, Numbered	.38	9.65						

14 AWG • Silicone Rubber/FR-Polyethylene

5120UM	2	Black, Red	.36	9.14	.045	1.14	.034	.86	21	69
5122UM	4	Black, Numbered	.41	10.41						

12 AWG • Silicone Rubber/FR-Polyethylene

5020UM	2	Black, Red	.39	9.91	.045	1.14	.034	.86	23	75
5022UM	4	Black, Numbered	.45	11.43						

BC = Bare Copper



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Circuit Integrity (CI) SAFE-T-Line® Cable

Commercial Application, Addressable Systems

300V, 105°C • Foil Shielded



• Riser Rated

- NEC: FRLR-CI
- NEC Article 760
- UL: R22303 for use in FHIT.30

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance (Nom)	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Solid or Stranded BC Conductors • Ceramifiable Silicone Rubber Insulation • Overall Beldfoil® Shield • Red Flame-Retardant Polyethylene Jacket

18 AWG • Solid • Silicone Rubber/FR-Polyethylene

5320FM	2	Black, Red	.31	7.87						
5322FM	4	Black, Numbered	.36	9.14						
5324FM	6	Black, Numbered	.42	10.67	.045	1.14	.034	.86	27	89
5326FM	8	Black, Numbered	.46	11.61						

18 AWG • 7 x 26 • Silicone Rubber/FR-Polyethylene

5300FM	2	Black, Red	.32	8.13						
5302FM	4	Black, Numbered	.37	9.40						
5304FM	6	Black, Numbered	.44	11.18	.045	1.14	.034	.86	27	89
5306FM	8	Black, Numbered	.47	11.94						

16 AWG • Solid • Silicone Rubber/FR-Polyethylene

5220FM	2	Black, Red	.33	8.38	.045	1.14	.034	.86	31	102
5222FM	4	Black, Numbered	.38	9.65						

16 AWG • 7 x 24 • Silicone Rubber/FR-Polyethylene

5200FM	2	Black, Red	.35	8.89	.045	1.14	.034	.86	31	102
5202FM	4	Black, Numbered	.40	10.16						

14 AWG • Solid • Silicone Rubber/FR-Polyethylene

5120FM	2	Black, Red	.36	9.14	.045	1.14	.034	.86	33	108
5122FM	4	Black, Numbered	.41	10.41						

14 AWG • 7 x 22 • Silicone Rubber/FR-Polyethylene

5100FM	2	Black, Red	.38	9.65	.045	1.14	.034	.86	33	108
5102FM	4	Black, Numbered	.44	11.18						

12 AWG • Solid • Silicone Rubber/FR-Polyethylene

5020FM	2	Black, Red	.39	9.91	.045	1.14	.034	.86	37	121
5022FM	4	Black, Numbered	.46	11.68						

12 AWG • 7 x 20 • Silicone Rubber/FR-Polyethylene

5000FM	2	Black, Red	.42	10.67	.045	1.14	.034	.86	40	131
5002FM	4	Black, Numbered	.48	12.19						

BC = Bare Copper




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Multi-Conductor Cable

Computer, Instrumentation and Medical Electronics Cables

Data Cables AMP SDL Connectors

350V, 80°C • Foil Shield



• Direct Burial

• NEC:CL2X


Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

20 AWG • Polyolefin/Polyethylene

Solid TC Conductors • Polyolefin Insulation • Cabled • Overall Beldfoil® Shielding • 22 AWG Solid TC Drain Wire • Black High-Density Polyethylene Jacket											
9802	2	Chart 1	.190	4.83	.013	.33	.035	.89		32	75
9803	3	Chart 1	.205	5.21	.013	.33	.035	.89			
9890	10	Chart 1	.310	7.87	.013	.33	.040	1.02		42	138
9894	15	Chart 2R	.390	9.91	.013	.38	.045	1.14			

*One conductor to other conductors connected to shield.

300V, 80°C • Shielded



• AWM Style
• VW-1

• NEC: CL2X

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

26 AWG • PVC/PVC

Stranded (7 x 34) TC Conductors • PVC Insulation • Overall Duofoil® Shielding • 26 AWG Stranded TC Drain Wire • Black PVC Jacket								
1211A	4	White, Yellow, Orange, Green	.195	4.95	.015	.38	.036	.91
1212A	6	Red, Blue, Green, Blue, Yellow, Orange, White	.220	5.59	.015	.38	.037	.93
1213A	8	Black, Purple, Red, Blue, Green, Blue, Orange, Yellow, White	.239	6.07	.015	.38	.039	.98
1214A	66	White/Red, White/Brown, White/Black, Black, Red, Brown, Purple, Blue, Green, Gray, Aqua, Tan, Pink, Orange, White, Yellow	.301	7.65	.015	.38	.035	.89

TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

MIL-W-16878 (Type B) Conductors

600V, 105°C • Braid Shield

• VW-1

• MIL-W-16878 (Type B) Conductors



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance*	
			Inch	mm	Inch	mm	Inch	mm	pF/Ft	pF/m

Stranded TC Conductors • PVC Insulation • Clear Nylon Skin Over Insulation • Cabled • 90% TC Braid Shielding • PVC Jacket

22 AWG • 19 x 34 • PVC-Nylon/PVC

9965	1	White	.100	2.54	.010/.003	.25/.08	.010	.25	100	328
9966	2	White, Black	.176	4.47	.010/.003	.25/.08	.020	.51	87	285
9967	3	White, Black, Red	.184	4.67	.010/.003	.25/.08	.020	.51	88	289
9968	4	White, Black, Red, Green	.200	5.08	.010/.003	.25/.08	.020	.51	69	226

20 AWG • 19 x 32 • PVC-Nylon/PVC

9961	1	White	.109	2.77	.011/.003	.27/.08	.010	.25	103	388
9962	2	White, Black	.192	4.88	.011/.003	.27/.08	.020	.51	91	299
9963	3	White, Black, Red	.210	5.33	.011/.003	.27/.08	.025	.64	84	276
9964	4	White, Black, Red, Green	.226	5.74	.011/.003	.27/.08	.025	.64	100	328

16 AWG • 19 x 29 • PVC-Nylon/PVC

9951	1	White	.143	3.63	.012/.003	.30/.08	.016	.41	138	453
9952	2	White, Black	.250	6.35	.012/.003	.30/.08	.025	.64	95	312
9953	3	White, Black, Red	.264	6.71	.012/.003	.30/.08	.027	.69	101	331
9954	4	White, Black, Red, Green	.291	7.39	.012/.003	.30/.08	.027	.69	94	308


*One conductor to other conductors connected to shield.

TC = Tinned Copper • PVC = Polyvinyl Chloride

Security Systems and Duplex Primary Wire

Security/Audio/Power-Limited Control Cable • 200V, 75°C • Unshielded

• VW-1



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

20 AWG • PVC/PVC

Stranded (7 x 28) BC Conductors • PVC Insulation • Parallel • Chrome PVC Jacket

8484	4	Black, Green, Red, White	.173	4.39	.010	.25	.020	.51
------	---	--------------------------	------	------	------	-----	------	-----

Duplex Primary Wire • 300V, 75°C • Nonplenum • Unshielded

• VW-1



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Stranded BC Conductors • PVC Insulation • Parallel • Chrome PVC Jacket

16 AWG • 19 x 29 • PVC/PVC

8677	2	Brown, Red	.149 x .254	3.78 x 6.45	.024	.61	.022	.56
------	---	------------	-------------	-------------	------	-----	------	-----

14 AWG • 19 x 27 • PVC/PVC

8675	2	Brown, Red	.168 x .290	4.27 x 7.37	.023	.58	.023	.58
------	---	------------	-------------	-------------	------	-----	------	-----

12 AWG • 19 x 25 • PVC/PVC

8673	2	Brown, Red	.186 x 3.28	4.72 x 8.33	.026	.66	.022	.56
------	---	------------	-------------	-------------	------	-----	------	-----

10 AWG • 19 x 23 • PVC/PVC

8678	2	Brown, Red	.225 x .400	5.72 x 10.16	.032	.81	.025	.64
------	---	------------	-------------	--------------	------	-----	------	-----


BC = Bare Copper • PVC = Polyvinyl Chloride

Antenna Rotor Cables

Antenna Rotor Cable • 300V, 80°C • Unshielded

- AWM Style
- VW-1

- NEC: CM



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm


18 and 16 AWG • PVC/PVC

Stranded (16 x 30 and 19 x 28) TC Conductors • PVC Insulation • Cabled • Chrome PVC Jacket								
9405	6 (18 AWG)	Brown, Red, Yellow, Blue, Orange, Green	.345	8.76	.019	.48	.032	.81
	2 (16 AWG)	Black, White						

Antenna Rotor Cable • 150V, 80°C • Unshielded

- AWM Style

- NEC: CMG
- CEC: CMG FT4



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm


22 and 18 AWG • PVC/PVC

Stranded (7 x 30 and 16 x 30) TC Conductors • PVC Insulation • Cabled • Chrome PVC Jacket								
8446	4 (22 AWG)	Red, Green, Brown, Blue	.236	5.99	.011	.28	.032	.81
	2 (18 AWG)	Black, White						
8448	6 (22 AWG)	Brown, Red, Yellow, Blue, Orange, Green	.259	6.58	.011	.28	.032	.81
	2 (18 AWG)	Black, White						

Rubber SO Power and Control Cables • 600V, 60°C • Unshielded

- Oil Res

- UL: SO
- CSA: SO
- CSA: FT2



Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

16 AWG • EPDM/Rubber

Stranded (65 x 34) BC Conductors • EPDM Insulation • Cabled • Paper Tape Separator • Fillers Added • Black Rubber Jacket								
9420	5	Chart 2	.506	12.85	.033	8.38	.084	2.13
9422	7	Chart 2	.581	14.76	.033	8.38	0.83	2.11
9424	9	Chart 2	.720	18.29	.033	8.38	.100	2.54
9425	12	Chart 2	.720	18.29				
9427	16	Chart 2	.787	19.99				
9429	20	Chart 2	.862	21.29				

TC = Tinned Copper • PVC = Polyvinyl Chloride • BC = Bare Copper • EPDM = Ethylene-Propylene Diene Elastomer

GreenChoice™ LSZH Cables

GreenChoice non-halogen cables designed for industrial application are LSZH-jacketed. Versions of some of our most popular and reliable cables. These eco-friendly cables are fully recyclable while offering the same AWM and UL ratings as their Belden Classics counterparts.

The GreenChoice product line meets the requirements of LEED Pilot Credit 54 for up to 2 LEED points per installation to help builders achieve the next level of LEED certification. In addition, LEED certification can lead to tax breaks on the building dependent on state law.

LSZH

- ROHS Compliant
- REACH Compliant
- CA Prop 65 Compliant
- WEEE Compliant
- UL CMG
- CE Compliant

Part No.	Conductors	AWM Style	OD (Nom)		Capacitance (Nom)			
					Cond.-Cond.		Cond.-Shield	
			Inch	mm	pF/Ft	pF/m	pF/Ft	pF/m

Stranded Tinned Copper Conductors • Overall Beldfoil® Shielding • Black or Chrome LSZH Jacket

22 AWG

8771NH	3	21305	.199	5.05	23.0	75.5	41.0	134.5
9770NH	3	—	.145	3.68	32.0	105.0	60.0	196.9

20 AWG

8772NH	3	21305	.218	5.54	27.0	88.6	51.0	167.3
--------	---	-------	------	------	------	------	------	-------

18 AWG

8770NH	3	21305	.246	6.25	24.0	78.7	48.0	157.5
9418NH	4	21307	.245	6.22	24.5	80.4	44.0	144.4

Stranded Tinned Copper Conductors • Unshielded • Black or Chrome LSZH Jacket

22 AWG

8442NH	2	—	.168	4.27	12.5	41.0	—	—
8444NH	4	21307	.185	4.70	15.0	49.2	—	—

18 AWG

8489NH	4	21305	.243	6.17	16.3	53.3	—	—
--------	---	-------	------	------	------	------	---	---

LSZH = Low Smoke Zero Halogen



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com



Paired Cables



Table of Contents

Paired Cables	Page No.
Introduction and Selection Guide	190
Cable Characteristics Charts	193
Audio, Control, and Instrumentation Cable	198
Unshielded	198
Overall Beldfoil Shield	202
Individually Shielded Pairs	209
Overall Braid Shield	215
Combination Unshielded and Shielded	215
Overall Spiral Shield	216
Special Audio, Control, and Instrumentation Cable	217
Combination and Special Shielding	217
Computer Cable, Overall Beldfoil Shielding	219
RS-232	219
Low-Capacitance Computer Cable, Overall Beldfoil Shielding	220
RS-232 and RS-422	220
Low-Capacitance Computer Cable, Individually Shielded Pairs	221
RS-422 and Digital Audio	221
RS-232, RS-422, and Digital Audio	222
Low-Capacitance Computer Cable, Overall Beldfoil/Braid Shielding	223
RS-232	223
RS-232 and RS-422	224
RS-232 and RS-485	226
RS-485	227
POS	228
Low-Capacitance Computer Cable, Shielded Pairs and Overall Beldfoil/Braid Shielding	229
RS-232, RS-422, and Digital Audio	229
GreenChoice™ Cable	230

Molded Cable Assemblies

For molded cable assemblies, see our Molded Cable Assemblies brochure, available on-line at www.belden.com.

Classic Paired Cables

Belden's Classic paired cable line includes a select number of high-quality, high-reliability cables that meet or exceed UL standards and have been used worldwide for decades.

Belden paired products deliver low voltage analog data signals within enclosures, from controllers and I/Os to devices such as temperature and pressure sensors, relays, valves, meters, thermocouples, solenoids, actuators, contacts, push buttons, and alarms. They also are applicable for computers, communications, instrumentation, sound, control, audio, data transmission, and many more applications.

- Unsurpassed quality and reliability
- Robust designs that meet or exceed UL standards
- Proven performance in installations worldwide
- Broad range of AWG sizes, shielding options, and pair counts
- Convenient put-up options
- Polyolefin insulations provide lower capacitance performance when compared to cables

Shielding

Belden meets the demand for highly effective shielding technology with innovative, EMI/RFI-protective foil and braid designs like Beldfoil®. Belden's patented Beldfoil shield is an aluminum/polyester foil construction that yields a lightweight, strong, flexible and thin shield that provides extra insulation and 100% shield coverage. Beldfoil is ideally suited for multiple-pair, individually shielded audio, communication, and data cables.

Product Consistency

By manufacturing our products in ISO-certified, state-of-the-art manufacturing facilities, Belden assures that quality is built into each and every product. Precise diameter control of insulation and jacket diameters and concentric wall thickness assures fast, reliable manufacturing in high-speed automated equipment, and ease of termination and assembly in the field.

Cable Performance Benefits

Belden offers one of the broadest lines of UL Listed, NEC and CEC cables available from any single source. Paired designs allow balanced signal transmission which results in lower crosstalk through common mode rejection. Due to the improved noise immunity of twisted pairs, they generally permit higher data speeds than traditional multi-conductor cables.

Find the Right Product for Your Application

Belden Classic products are available from stock from Belden distributors. If the products above do not fit your application, Belden can also engineer specific constructions for your application.

Classic Paired Cables

Paired Computer Cable

AWG	Overall Beldfoil			Overall Foil/Braid			Individual Foil	Individual Foil + Overall Foil/Braid
	SR-PVC, PVC, [FEP]	PE	Datalene®, [FFEP]	SR-PVC	PE, PP, [FEP]	Datalene, PE, [FFEP]	Datalene, [FFEP]	Datalene
		15.5 pF/Ft	11.0-13.5 pF/Ft		15.5 pF/Ft	11.0-13.5 pF/Ft	11.0-13.5 pF/Ft	11.0-13.5 pF/Ft
28	—	—	RS-232/485	—	RS-232/422	RS-232/485	—	—
24	RS-232 [RS-232]	RS-232/422	RS-232/422 [RS-232/422]	RS-232	RS-232/423	RS-232/422 RS-485 [RS-485]	RS-422, DA [RS-232/422, DA]	RS-232/422, DA
22	—	—	—	RS-232	POS	—	—	—

DA = Digital Audio • POS = Point of Sale • [Brackets] = High-Temperature Cables.

Audio, Control, and Instrumentation Cables

AWG	Unshielded	Overall Beldfoil	Individual Foil	Overall Braid
24	ACI	—	ACI	—
22	ACI [ACI]	ACI [ACI]	ACI [ACI]	—
20	ACI	ACI [Special Hi-Temp ACI]	ACI	—
18	ACI [ACI]	ACI [ACI]	ACI	ACI
16	ACI	ACI	—	—
14	ACI	ACI	—	—
12	ACI	ACI	—	—

AIC = Audio, Control, and Instrumentation • DA = Digital Audio • POS = Point of Sale • [Brackets] = High-Temperature Cables.

Classic Paired Cables

Selection Guide

Shielded Multi-Pair Computer Cables RS-232, RS-422, and RS-485 Applications. All Cables are UL Listed.

Specifications	9804	8132	9829	8332	9501	8102	9729	8162	9990	9841	9680	9302^	8302	8777	9873	9773	8132F0	1419A		
Conductor Size: (AWG)	28	✓	✓															✓		
	24			✓	✓	✓	✓	✓	✓	✓	✓								✓	
	22											✓	✓	✓						
	20															✓				
	18																✓			
Page No.:	226	226	224	224	219	225	221	229	209	227	220	207	223	211	214	214	220	220		
Insulation:	S-R PVC				✓	✓						✓	✓	✓						
	Polyethylene			✓					✓	✓	✓				✓	✓				
	Polypropylene	✓																		
	Datalene® HDPE		✓				✓	✓	✓								✓	✓		
Shield:	Overall Foil					✓					✓	✓					✓	✓		
	Individual Foil						✓	✓	✓					✓	✓	✓				
	Overall Foil/Braid	✓	✓	✓	✓		✓		✓		✓		✓							
	Braid Coverage	90%	65%	65%	65%		65%		65%		90%		65%							
Drain Wire:	Overall	•	•	•	x	•	•	▲	▲	▲	•	•	•		▲	▲	▲	•	•	
	Each Pair							•	•	•					•	•	•			
Pairs Available:	1					✓					✓									
	2	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓					✓	✓	
	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	
	4	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓					✓	✓	
	5	✓	✓	✓	✓	✓	✓		✓				✓					✓	✓	
	6			✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		✓	
	7	✓		✓	✓	✓	✓		✓				✓							
	8		✓			✓	✓		✓					✓					✓	
	9	✓		✓		✓	✓	✓		✓		✓	✓		✓	✓	✓			
	10			✓	✓	✓	✓		✓				✓							
	11							✓							✓	✓				
	12	✓		✓				✓		✓					✓	✓	✓			
	12.5		✓		✓		✓				✓			✓					✓	✓
	13	✓																		
	15				✓	✓	✓	✓	✓				✓	✓	✓	✓	✓	v		✓
	17							✓							✓					
	18	✓	✓	✓	✓		✓		✓					✓					✓	
	19					✓		✓					✓		✓					
	25	✓	✓	✓	✓	✓	✓		✓	✓				✓					✓	
	27							✓					✓		✓					
	31	✓														✓				
37															✓					
50						✓														
Capacitance* (pF/Ft)	15.5	11.0	15.5	30.0	30.0	12.5	12.5	12.5	25.0	12.8	15.5	35.0	35.0	30.0	30.0	30.0	11.0	13.0		

^Standard PVC insulation, solid conductors.
 *Capacitance may vary on some cables.
 Drain Wire Key: • = Drain wire overall, ▲ = Drain wire each pair, x = No drain wire

HDPE = High-Density Polyethylene • PVC = Polyvinyl Chloride




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com


Overall Beldfoil® Shield

Cable Characteristics


Attenuation

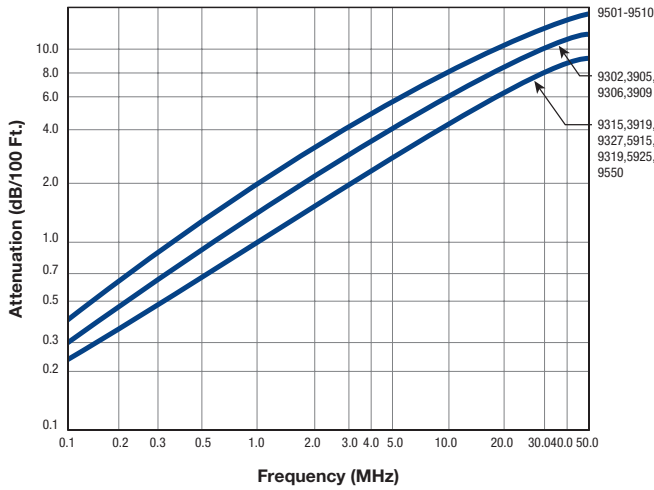

Rise Time

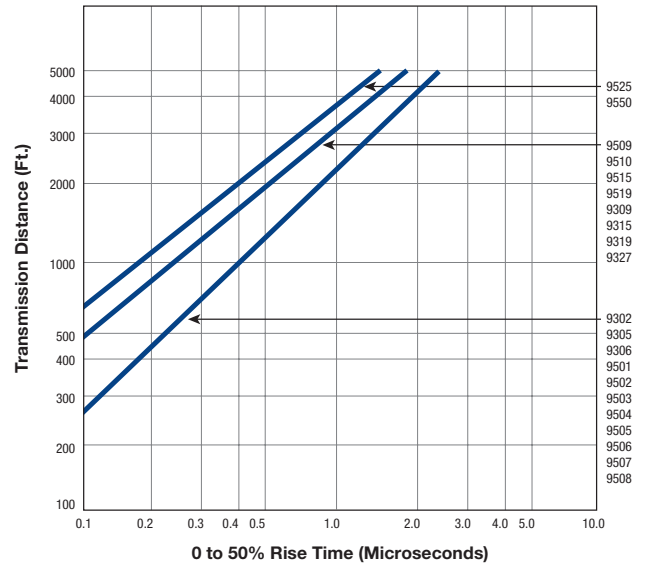

Bit Rate

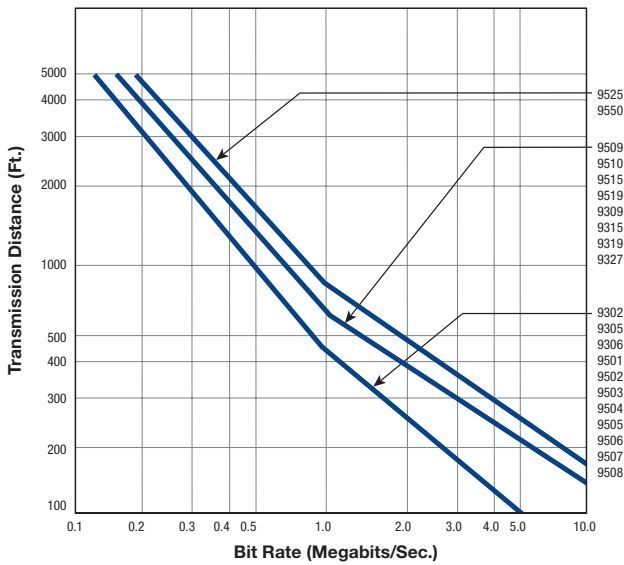


Cables are terminated in their characteristic impedance. Signal source electrical characteristics: 50 ohms and 10% to 90% rise time less than 5 nanoseconds.

Charts assume 5% peak-to-peak time jitter as determined by eye pattern measurements of pseudorandom NRZ code.


Overall Foil/Braid Shield

Cable Characteristics


Attenuation

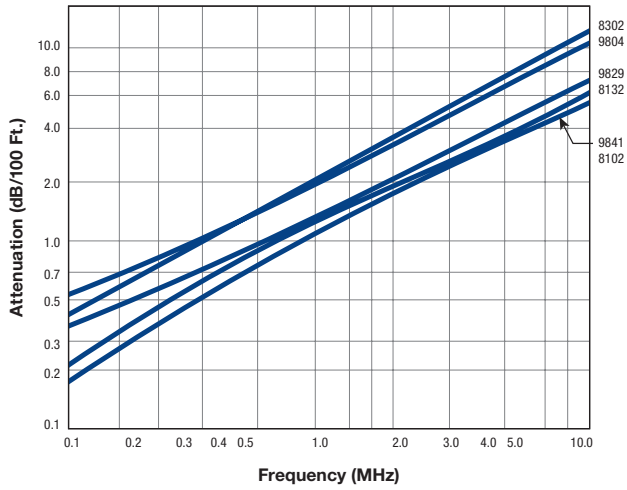

Rise Time


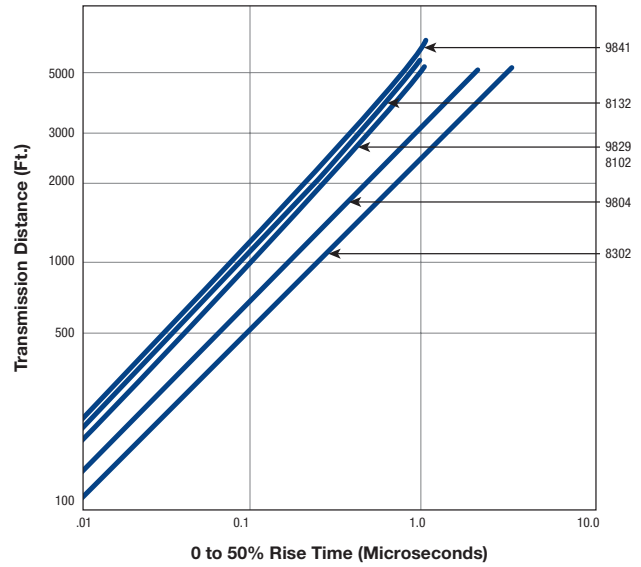


Bit Rate

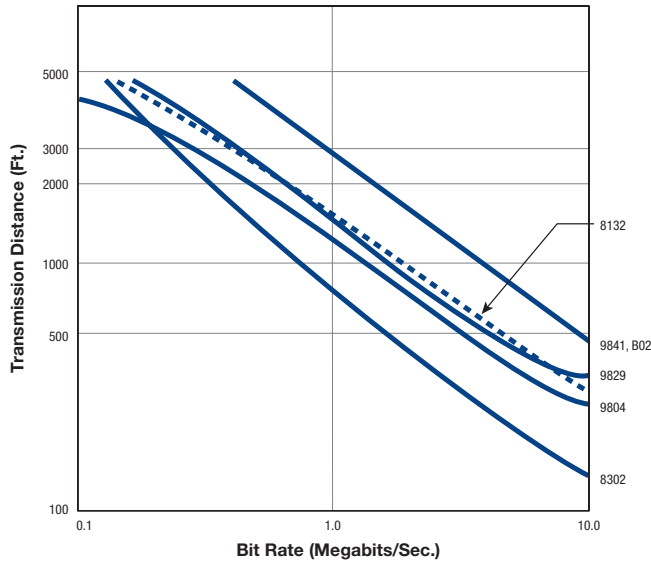


Individually Shielded

Cable Characteristics
(Part No. 9728–9738)

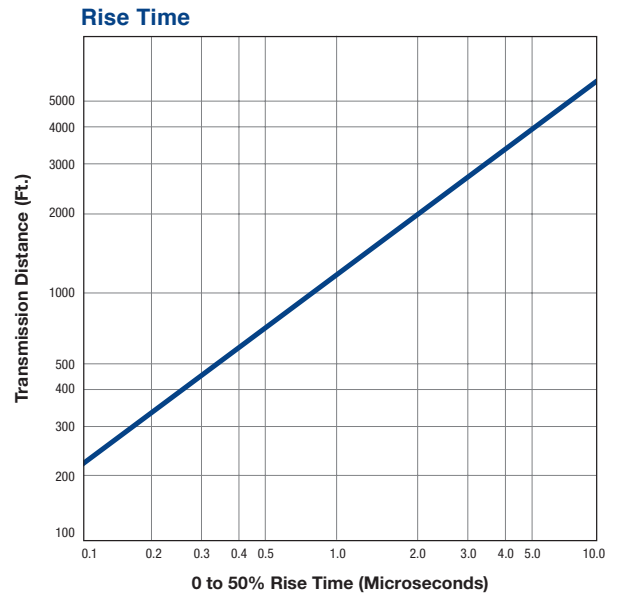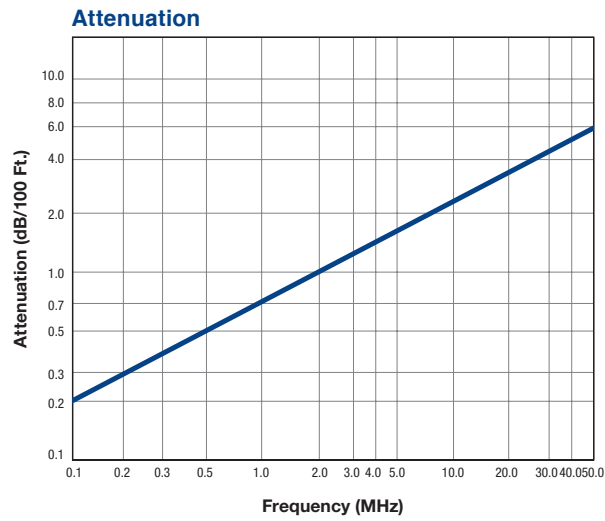

Cables are terminated in their characteristic impedance. Signal source electrical characteristics: 50 ohms and 10% to 90% rise time less than 5 nanoseconds.



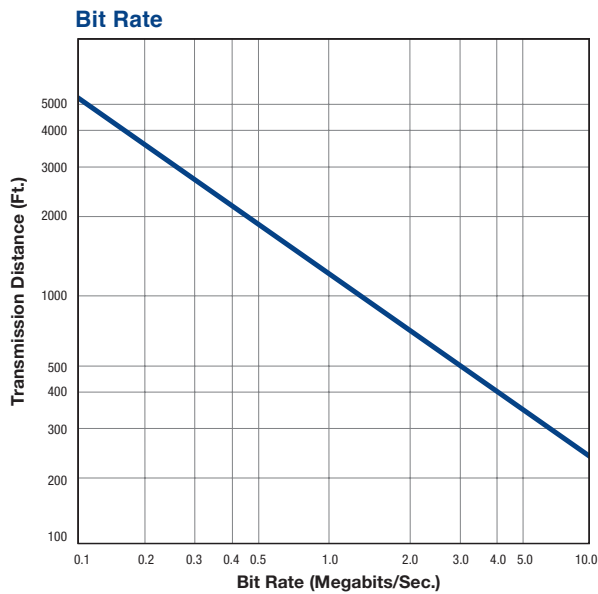


Charts assume 5% peak-to-peak time jitter as determined by eye pattern measurements of pseudorandom NRZ code.

Individually Shielded

Cable Characteristics

(Part No. 8777-9767, 9873-9879, 9773-9777)

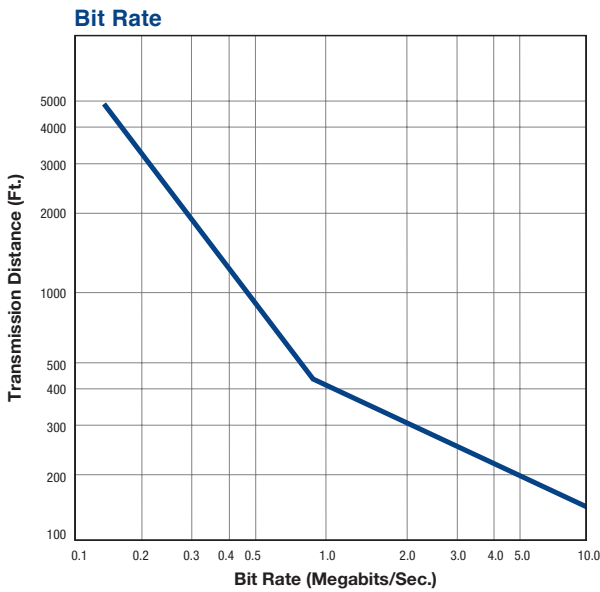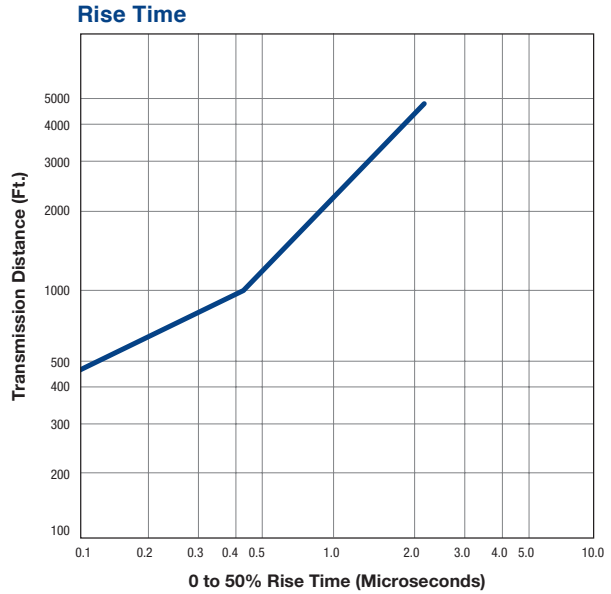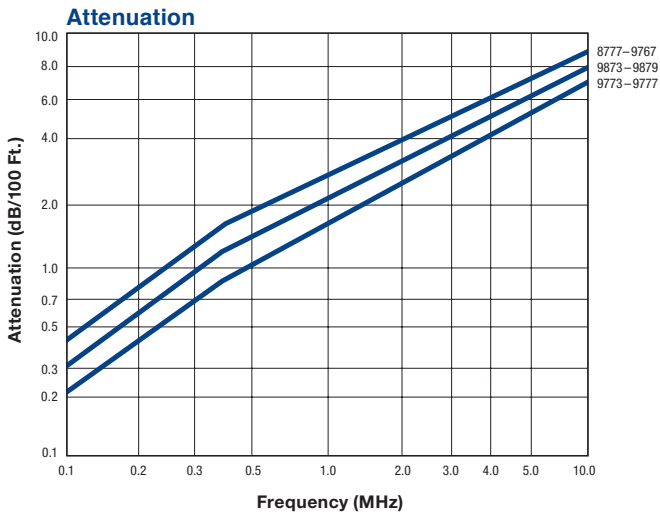

Recommended for audio, pulse, and radio frequency applications requiring superior circuit isolation.

Insulation resistance between shields:
100 megohms/1000' nom.


Capacitance between adjacent shields:
115 pf/ft. nom.

Working voltage between adjacent shields:
50 volts max.


Individually Shielded Pairs with Overall Foil/Braid Shield

Cable Characteristics

Attenuation

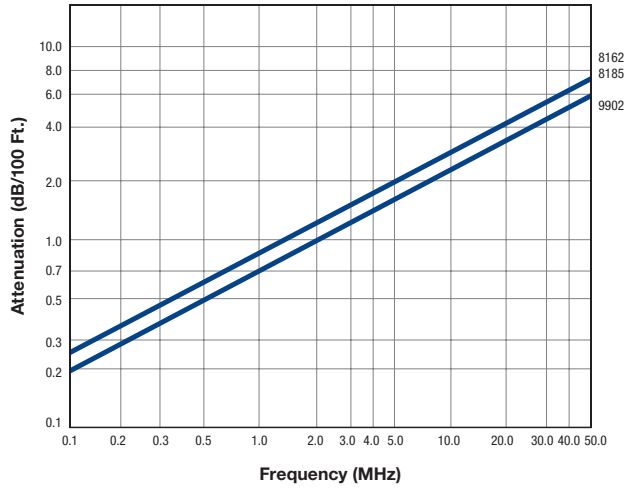


Rise Time

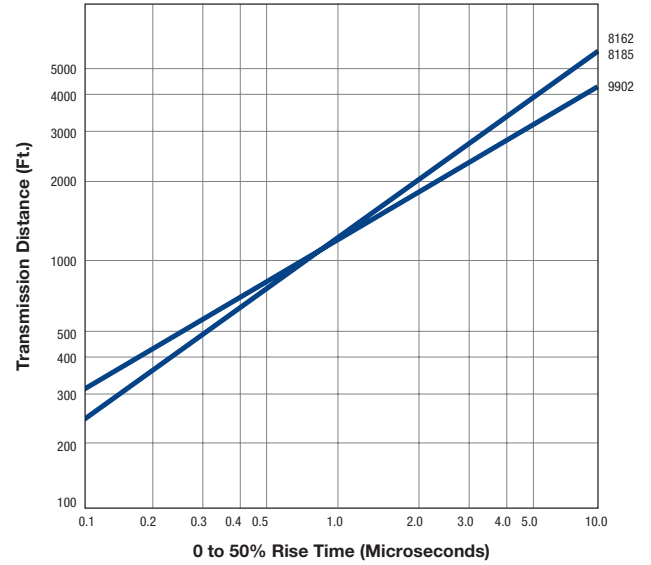

Cables are terminated in their characteristic impedance. Signal source electrical characteristics: 50 ohms and 10% to 90% rise time less than 5 nanoseconds.

Bit Rate

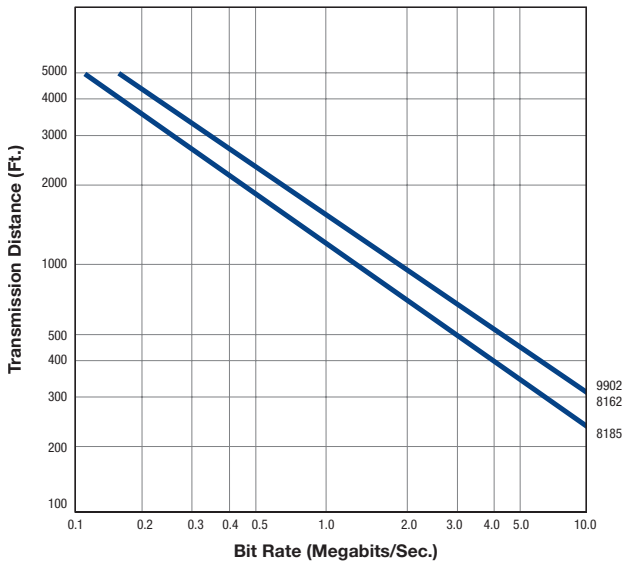

Charts assume 5% peak-to-peak time jitter as determined by eye pattern measurements of pseudorandom NRZ code.

Audio, Control, and Instrumentation Cables

300V 80°C • Unshielded



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	

Stranded TC or Solid BC Conductors • PVC Insulation • Chrome PVC Jacket

20 AWG • 7 x 28 • PVC/PVC

8205	1	Chart 3	.180	4.57	.013	.33	.025	.64	NEC: CMG • CEC: CMG FT4 UL AWM Style 2464 (Except 8205)
9750	3	Chart 3	.299	7.59					
9751	6	Chart 3	.366	9.30	.013	.33	.035	.89	
9752	9	Chart 3	.429	10.90					
9755	15	Chart 3	.545	13.84	.013	.33	.040	1.02	

19 AWG • Solid • PVC/PVC

8486	1	Brown-Tan	.182	4.62	.015	.38	.025	.64	NEC: CM • CEC: CM
------	---	-----------	------	------	------	-----	------	-----	-------------------

18 AWG • 7 x 26 • PVC/PVC

8461	1	Black-White	.234	5.94	.022	.56	.028	.71	NEC: CMG • CEC: CMG FT4
------	---	-------------	------	------	------	-----	------	-----	-------------------------

18 AWG • 16 x 30 • PVC/PVC

9740	1	Chart 3	.210	5.33	.014	.36	.032	.81	NEC: CMG • CEC: CMG FT4 UL AWM Style 2464
9156	2	Chart 3	.333	8.46	.014	.36	.035	.89	
8690	3	Chart 3	.347	8.81					
9157	4	Chart 3	.381	9.68					
9159	5	Chart 3	.391	9.93	.014	.36	.032	.81	
8691	6	Chart 3	.433	11.00					
9161	8	Chart 3	.485	12.32	.014	.36	.037	.94	
8692	9	Chart 3	.524	13.31	.014	.36	.040	1.02	
9741	12	Chart 3	.600	15.24	.014	.36	.046	1.17	
9742	15	Chart 3	.677	17.20	.014	.36	.051	1.30	
9743	19	Chart 3	.721	18.31	.014	.36	.055	1.40	

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Audio, Control, and Instrumentation Cables

Plenum • 300V, 80°C • Unshielded



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Additional Features/ Ratings
			Inch	mm	Inch	mm	Inch	mm	

Stranded TC Conductors • PVC Insulation • Chrome PVC jacket

16 AWG • 19 x 29 • PVC/PVC

8471	1	Black-White	.274	6.96	.023	.58	.032	.81	NEC: CMG • CEC: CMG FT4 UL AWM Style 2598
------	---	-------------	------	------	------	-----	------	-----	----------------------------------------------

14 AWG • 42 x 30 • PVC/PVC

8473	1	Black-White	.340	8.64	.031	.79	.032	.81	NEC: CL3 • CEC: FAS 90 FT4 UL AWM Style 2587
------	---	-------------	------	------	------	-----	------	-----	-------------------------------------------------

12 AWG • 65 x 32 • PVC/PVC

8477	1	Black-White	.386	9.80	.032	.81	.035	.89	NEC: CL3R UL AWM Style 2587
------	---	-------------	------	------	------	-----	------	-----	--------------------------------

Plenum • 300V • Unshielded



- NEC: CMP
- CEC: CMP FT6

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • FEP/FEP

Stranded (7 x 30) TC Conductors • FEP Insulation • Red FEP Jacket

88442	1	Chart 3	.102	2.59					
88741	2	Chart 3	.169	4.29	.006	.15	.012	.30	
88757	4	Chart 3	.200	5.08	.006	.15	.019	.23	

22 AWG • FEP/Flamarrest®

Stranded (7 x 30) TC Conductors • FEP Insulation • Natural Flamarrest Jacket

82442	1	Chart 3	.112	2.84					
82741	2	Chart 3	.179	4.55					
82742	3	Chart 3	.191	4.85	.006	.15	.014	.36	
82757	4	Chart 3	.210	5.33					
82743	6	Chart 3	.238	6.05	.006	.15	.015	.38	

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Audio, Control, and Instrumentation Cables

Plenum • 300V • Unshielded



- NEC: CMP
- CEC: CMP FT6

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

18 AWG • FEP/FEP

Stranded (19 x 30) TC Conductors • FEP Insulation • Red FEP Jacket

89740	1	Black-Red	.136	3.45	.006	.17	.009	.23
-------	---	-----------	------	------	------	-----	------	-----

18 AWG • FEP/Fluorocopolymer

Plenum • FEP Insulation • Red Fluorocopolymer Jacket

87740	1	Black-Red	.140	3.56	.006	.17	.011	.28
-------	---	-----------	------	------	------	-----	------	-----

18 AWG • FEP/Flamarrest®

Plenum • FEP Insulation • Natural Flamarrest Jacket

82740	1	Black-Red	.147	3.73	.006	.17	.015	.38
-------	---	-----------	------	------	------	-----	------	-----

150V, 80°C • Unshielded • Telephone Cable



- PVC/PVC
- UL AWM Style 2576

- NEC: CMG
- CEC:CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Solid TC Conductors • PVC Insulation • Chrome PVC Jacket

24 AWG • PVC/PVC

9562	2	Chart 4	.199	5.05	.010	.25	.032	.81
9566	6	Chart 4	.289	7.34				
9570	10	Chart 4	.310	7.87				
9585	25	Chart 4	.480	12.19				

22 AWG • PVC/PVC

8740	1	Chart 3	.156	3.96	.010	.25	.032	.81
8741	2	Chart 3	.230	5.84				
8742	3	Chart 3	.242	6.15				
8757	4	Chart 3	.264	6.71				
8743	6	Chart 3	.293	7.44				
9160	8	Chart 3	.323	8.20				
8744	9	Chart 3	.350	8.89				

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Audio, Control, and Instrumentation Cables

150V, 80°C • Unshielded



• UL AWM Style 2576

- NEC: CMG
- CEC: CMG FT4

Part No.	Conductors	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

22 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Chrome PVC Jacket								
9744	2	Chart 3	.244	6.20				
9745	3	Chart 3	.257	6.53	.010	.25	.032	.81
9746	4	Chart 3	.281	7.14				
8747	6	Chart 3	.320	8.13	.010	.25	.035	.89
8748	9	Chart 3	.389	9.88	.010	.25	.037	.94
9747	12	Chart 3	.425	10.80				
8749	15	Chart 3	.440	11.18	.010	.25	.040	1.02
9748	19	Chart 3	.505	12.83				
8750	27	Chart 3	.575	14.61	.010	.25	.045	1.14


TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Audio, Control and Instrumentation Cables

Overall Beldfoil® Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Polypropylene/PVC

Solid TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 22 AWG Solid TC Drain Wire • Gray or Black PVC Insulation													
8450	1	Black-Red	.118	3.00	.007	.18	.018	.46	40	133	76	249	NEC: CM • CEC: CM 300V, 75°C

22 AWG • Polypropylene/PVC

Solid TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Chrome PVC Insulation													
8752	38	Tech Bulletin T/8-4	.610	15.50	.008	.20	.045	1.14	17	56	24.3	80	200V, 75°C

22 AWG • SR-PVC/PVC

Stranded (7 x 30) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Pale Fawn Beige Striated PVC Jacket													
9414	1	White-Black	.186	4.72	.010	.25	.035	.89	50	164	95	312	NEC: CMG • CEC: CMG FT4 UL AWM Style 2464 (300V, 80°C)

22 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Chrome PVC Jacket													
9462	1	Black-Red	.186	4.72	.013	.33	.035	.89	50	164	90	295	200V, 75°C

22 AWG • Polyethylene/PVC

Stranded (7 x 30) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Chrome PVC Jacket													
8761	1	Black-Clear	.175	4.45	.016	.41	.025	.64	24	79	47	154	NEC: CM • CEC: CM UL AWM Style 2092 (300V, 60°C)

22 AWG • Polyethylene/PVC

Stranded (7 x 30) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Chrome PVC Jacket. Jacket and Shield Are Bonded So Both Can Be Removed on Automatic Stripping Equipment. Drain Wire Is Inside Foil Shield.													
9461	1	Black-Clear	.180	4.57	.016	.41	.026	.66	24	79	47	154	NEC: CM • CEC: CM UL AWM Style 2092 (300V, 60°C)

22 AWG • Polypropylene/PVC


Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Paper Wrap (to Facilitate Stripping) • Gray or Black PVC Jacket. Jacket and Shield Are Bonded So Both Can Be Removed on Automatic Stripping Equipment. Drain Wire Is Inside Foil Shield.													
8451	1	Black-Red	.138	3.51	.008	.20	.020	.51	34	112	67	220	NEC: CMR • CEC: CMG 300V, 75°C

TC = Tinned Copper • PVC = Polyvinyl Chloride



Audio, Control and Instrumentation Cables

Overall Beldfoil® Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Polypropylene/PVC

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • PVC Jacket (Black, Gray, Brown, Red, Orange, Yellow, Green, Blue, Purple, White)													
9451	1	Black-Red	.135	3.43	.008	.20	.020	.51	35	115	67	220	NEC: CMR • CEC: CMG FT4 300V, 75°C

22 AWG • Polypropylene/LSZH

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Black LSZH Jacket. Jacket and Shield Are Bonded So Both Can Be Removed on Automatic Stripping Equipment. Drain Wire Is Inside Foil Shield.													
9451SB	1	Black-Red	.160	4.06	.008	.20	.032	.81	35	115	67	220	NEC: CMG-LS • CEC: CMG-LS FT4 300V, 105°C

22 AWG • Polyolefin/PVC

Stranded (7 x 30) TC Conductors • Polyolefin Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • PVC Jacket (Red-Green, Red-Black, Red-Purple, Red-Gray)													
9451D	2	Black-Red	.135 x .270	3.43 x 6.86	.008	.20	.020	.51	34	112	67	220	Zipcord Construction NEC CMR • CEC: CMR FT4 300V, 60°C

22 AWG • Polypropylene/PVC

Unique Design Features Lower Capacitance and Greater Flexibility Than Standard Audio Pair Constructions.

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 24 AWG Stranded TC Drain Wire • PVC Jacket (Black, Gray, Brown, Red, Orange, Yellow, Green, Blue, Purple, White)													
1266A	1	Black-Red	.143	3.63	.010	.25	.020	.51	30	99	54	177	NEC: CM • CEC: CM 300V

22 AWG • PVC/PVC

Unique Design Features Lower Capacitance and Greater Flexibility Than Standard Audio Pair Constructions.

Stranded (7 x 30) TC Conductors • PVC Insulation • Overall Beldfoil Shielding • 24 AWG Stranded TC Drain Wire • PVC Jacket (Black, Gray, Brown, Red, Orange, Yellow, Green, Blue, Purple, White)													
1503A	1	Black-Red	.142	3.61	.010	.25	.020	.51	53	174	97	318	NEC: CM • CEC: CM 300V

22 AWG • PVC/PVC

Stranded (19 x 34) TC Conductors • PVC Insulation • Overall Beldfoil Shielding • 24 AWG Stranded TC Drain Wire • PVC Jacket (Red-Green, Red-Purple, Red-Gray)													
1504A	2	Black-Red	.143 x .286	3.63 x 7.26	.010	.25	.017	.43	57	187	100	328	Stereo Audio Cable Zipcord Construction NEC: CM • CEC: CM 150V

TC = Tinned Copper • LSZH = Low Smoke Zero Halogen • PVC = Polyvinyl Chloride



Audio, Control and Instrumentation Cables

Overall Beldfoil® Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • FEP/Flamarrest

Stranded (19 x 34) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • White Flamarrest Jacket. Jacket and Shield Are Bonded So Both Can Be Removed on Automatic Stripping Equipment. Drain Wire Is Inside Foil Shield.

9451DP	2	Black-Red, Black-White	.127 x .269	3.43 x 6.86	.007	.18	.017	.43	35	115	67	220	Plenum Zipcord Construction NEC: CMP • CEC: CMP FT6 300V
--------	---	------------------------	-------------	-------------	------	-----	------	-----	----	-----	----	-----	-------------------------------------------------------------------

22 AWG • FEP/Flamarrest

Stranded (7 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Flamarrest Jacket (Black, Gray, Brown, Red, Orange, Yellow, Green, Blue, Purple, White)

9451P	1	Black-Red	.127	3.23	.007	.18	.017	.43	35	115	67	220	NEC: CMP • CEC: CMP FT6
-------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	-------------------------

22 AWG • FEP/Flamarrest®

Stranded (7 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Natural Flamarrest Jacket

82761	1	Black-Red	.116	2.95	.006	.15	.014	.36	35	115	67	220	NEC: CMP • CEC: CMP FT6
-------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	-------------------------

22 AWG • FEP/FEP

Stranded (7 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Red FEP Jacket

88761	1	Black-Red	.119	3.02	.006	.15	.014	.36	35	115	67	220	NEC: CMP • CEC: CMP FT6
-------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	-------------------------

22 AWG • FEP/Fluorocopolymer


Stranded (7 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Red Fluorocopolymer Jacket

87761	1	Black-Red	.116	2.95	.006	.15	.014	.36	35	115	67	220	NEC: CMP • CEC: CMP FT6
-------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	-------------------------

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene

Audio, Control and Instrumentation Cables

Overall Beldfoil® Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

20 AWG • PVC/PVC

Stranded (7 x 28) TC Conductors • PVC Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Beige PVC Jacket													
9154	1	Black, Red	.198	5.03	.014	.36	.031	.79					NEC: CMG • CEC: CMG FT4 UL AWM Style 2464 (300V, 80°C)

20 AWG • Polyethylene/PVC

Stranded (7 x 28) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 20 AWG Stranded TC Drain Wire • Chrome PVC Jacket													
8762	1	Black-Clear	.204	5.18	.016	.41	.028	.71					NEC: CM • CEC: CM UL AWM Style 2092 (300V, 60°C)

18 AWG • Polyethylene/PVC

Stranded (19 x 30) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 20 AWG TC Drain Wire Chrome PVC Jacket													
8760	1	Black-Clear	.222	5.64	.019	.48	.028	.71	24	79	44	144	NEC: CM • CEC: CM UL AWM Style 2092 (300V, 60°C)

18 AWG • Polyethylene/PVC

Stranded (19 x 30) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 20 AWG TC Drain Wire • Chrome PVC Jacket. Jacket and Shield Are Bonded So Both Can Be Removed on Automatic Stripping Equipment. Drain Wire Is Inside Foil Shield.													
9460	1	Black-Clear	.230	5.84	.019	.48	.030	.76	24	79	44	144	NEC: CM • CEC: CM UL AWM Style 2092 (300V, 60°C)

18 AWG • FEP/FEP

Stranded (19 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 20 AWG TC Drain Wire • Red FEP Jacket													
88760	1	Black-Red	.150	3.81	.007	.18	.014	.36	51	167	97	318	NEC: CMP • CEC: CMP FT6 300V

18 AWG • FEP/ Fluorocopolymer

Stranded (19 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 20 AWG TC Drain Wire • Red Fluorocopolymer Jacket													
87760	1	Black-Red	.150	3.81	.007	.18	.014	.36	51	167	97	318	NEC: CMP • CEC: CMP FT6 300V

18 AWG • FEP/ Flammarrest®


Stranded (19 x 30) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 20 AWG TC Drain Wire • Natural Flammarrest Jacket													
82760	1	Black-Red	.150	3.81	.007	.18	.014	.36	51	167	97	318	NEC: CMP • CEC: CMP FT6 300V

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride



Audio, Control and Instrumentation Cables

Overall Beldfoil® Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

Stranded TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 18 AWG Stranded TC Drain Wire • Chrome PVC Jacket

16 AWG • 19 x 29 • Polyethylene/PVC

8719	1	Black-Clear	.313	7.95	.032	.81	.032	.81	23	75	44	144	NEC: CM, CL2 • CEC: CM UL AWM Style 20253 (600V, 80°C)
------	---	-------------	------	------	------	-----	------	-----	----	----	----	-----	-----------------------------------------------------------

14 AWG • 19 x 27 • Polyethylene/PVC

8720	1	Black-Clear	.355	9.02	.032	.81	.035	.89	24	79	47	154	NEC: CM, CL2 UL AWM Style 20253 (600V, 80°C)
------	---	-------------	------	------	------	-----	------	-----	----	----	----	-----	-------------------------------------------------


12 AWG • 19 x 25 • Polyethylene/PVC

8718	1	Black-Clear	.400	10.16	.037	.94	.040	1.02	25	82	49	161	NEC: CL2 C(UL) AWM II A UL AWM Style 20253 (600V, 80°C)
------	---	-------------	------	-------	------	-----	------	------	----	----	----	-----	---------------------------------------------------------------

TC = Tinned Copper • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

300V, 60°C • Overall Beldfoil® Shield



- NEC: CMG
- CEC: CMG FT4


Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/ Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • PVC/PVC

Solid TC Conductors • PVC Insulation • Overall Beldfoil Shielding • 22 AWG Stranded TC Drain Wire • Chrome PVC Jacket														
9302	2	Chart 3	.244	6.20										
9305	4	Chart 3	.265	6.73	.013	.33	.032	.81						
9306	6	Chart 3	.315	8.00										
9309	9	Chart 3	.363	9.22	.013	.33	.033	.84	35	115	50	164	AWM Style 2464 (300V, 80°C)	
9315	15	Chart 3	.449	11.41	.013	.33	.037	.94						
9319	19	Chart 3	.495	12.57	.013	.33	.040	1.02						
9327	27	Chart 3	.615	15.62	.013	.33	.045	1.14						
8751	51	Note 1	.710	18.03	.013	.33	.050	1.27	30	98	42.8	140	300V, 60°C	

Note 1: See Tech Bulletin T/8-4.

300V • Overall Duofoil® Shield



- NEC: CM
- CEC: CM

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/ Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Datalene®/PVC

Solid TC Conductors • Datalene Insulation • Overall Duofoil Shielding • 22 AWG Stranded TC Drain Wire • Black PVC Jacket													
9184	2	Black-Yellow, Red-Blue	.385	9.78	.035	.89	.041	1.03	8.7	25.5	14.1	46.3	150 Ω Nom. Impedance 78% Velocity of Prop. Conductor DCR (Nom): 16.5/1000' (54.13 Ω/km)

TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Audio, Control and Instrumentation Cables

300V, 80°C • Overall Beldfoil® Shield • Plenum and Non-Plenum



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Polyolefin/PVC

Stranded (7 x 32) TC Conductors • Polyolefin Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Matte Black PVC Jacket													
1508A	1	Black-Red	.131	3.33	.008	.20	.024	.61	31	102	58	190	NEC: CM

24 AWG • Polypropylene/PVC

Stranded (7 x 32) TC Conductors • Polypropylene Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • PVC Jacket (Gray, Brown, Red, Green, Light Blue, Purple, White, or Black). Jacket and Shield Are Bonded So Both Can Be Removed With Automatic Stripping Equipment. For Cross-Connect Use With 1408R Snake Cables.													
1883A	1	Black-Red	.123	3.12	.008	.29	.020	.51	31	102	58	190	NEC: CMR • CEC: CMR FT4

24 AWG • Polyethylene/PVC

Stranded (7 x 32) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Chrome PVC Jacket													
8641	1	Black-Clear	.168	4.27	.016	.41	.025	.64	22	72	42	138	NEC: CM • CEC: CM AWM Style 2092


24 AWG • FEP/FEP

Stranded (7 x 32) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Red FEP Jacket													
88641	1	Black-Red	.106	2.69	.006	.15	.014	.36	31	102	59	194	Plenum • Non-Conduit NEC: CMP • CEC: CMP FT6

24 AWG • FEP/Flamarrest®

Stranded (7 x 32) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Red Flamarrest Jacket													
82641	1	Black-Red	.106	2.69	.006	.15	.014	.36	31	102	59	194	Plenum • Non-Conduit NEC: CMP • CEC: CMP FT6

High-Temperature • 300V, 150°C • Overall Beldfoil Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	


20 AWG • ETFE/ETFE

Stranded (7 x 28) TC Conductors • ETFE Insulation Overall Beldfoil Shielding • 22 AWG TC Drain Wire • Clear ETFE Jacket													
85164	4	Chart 3	.344	8.74	.015	.38	.025	.64	23	75	40	111	VW-1
85168	8	Chart 3	.439	11.15	.015	.38	.025	.64	23	75	40	111	VW-1

TC = Tinned Copper • ETFE = Ethylene/TFE = Tetrafluoroethylene • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

Individually Shielded Pairs




- NEC: CM
- CEC: CM

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Polyethylene/PVC

Stranded (7 x 32) TC Conductors • Polyethylene Insulation • Individually Beldfoil® Shielded Pairs • 24 AWG TC Drain Wire • Chrome PVC Jacket													
9990	3	Chart 3	.255	6.48									UL AWM Style 2919 (30V, 80°C) 60 Ω Nom. Impedance 66% Velocity of Prop. Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)
9991	6	Chart 3	.330	8.38	.011	.28	.035	.89	25	82	47	154	
9992	9	Chart 3	.383	9.73									
9993	12	Chart 3	.428	10.87									
9995	25	Chart 3	.636	16.15	.011	.28	.052	1.32					

Individually Shielded Pairs



- NEC: MPG, CMG
- CEC: MPG, CMG FT4

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Polyethylene/PVC

Solid TC Conductors • Polyethylene Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Chrome PVC Jacket													
8767	3	Chart 3	.279	7.10	.013	.33	.037	.94					UL AWM Style 2464 (300V, 80°C)
8768	6	Chart 3	.379	9.60	.013	.33	.037	.94	40	131	77	253	
8764	9	Chart 3	.425	10.80	.013	.33	.040	1.02					
8766	15	Chart 3	.525	13.30	.013	.33	.045	1.14					

TC = Tinned Copper • ETFE = Ethylene/TFE = Tetrafluoroethylene • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

Individually Shielded Pairs • RS-485



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • SR-PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • Individually Beldfoil® Shielded Pairs • 22 AWG TC Drain Wire • Pale Fawn Beige PVC Jacket. Pairs Parallel Under Jacket.													
9406	2	Black-White Black-Yellow	.173 x .280	4.39 x 7.11	.011	.28	.033	.84	50	164	95.5	312	NEC: CMG • CEC: CMG FT4 UL AWM Style 2464 (300V, 80°C) 50 Ω Nom. Impedance 60% Velocity of Prop. Conductor DCR (Nom): 15.0 Ω /1000' (49.2 Ω/km)

22 AWG • Polypropylene/PVC

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Chrome PVC Jacket. Pairs Cabled on a Common Axis to Reduce Diameter.													
8723	2	Black-Red Green-White	.160	4.06	.009	.22	.020	.51	35	115	62	203	NEC: CM • CEC: CM 300V, 60°C 45 Ω Nom. Impedance 66% Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)


22 AWG • Polypropylene/LSZH

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Black LSZH Jacket. Pairs Cabled on a Common Axis to Reduce Diameter.													
8723SB	2	Black-Red Green-White	.196	4.98	.009	.22	.034	.86	35	115	62	203	NEC: CMG-LS • CEC: CMG-LS FT4 Limited Smoke 300V, 60°C 45 Ω Nom. Impedance 66% Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)

TC = Tinned Copper • LSZH = Low Smoke Zero Halogen • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

Individually Shielded Pairs • RS-485



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Polypropylene/PVC

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Individually Beldfoil®Shielded Pairs • 22 AWG TC Drain Wire • Chrome PVC Jacket												
8777	3	Chart 3	.273	6.93								
8778	6	Chart 3	.362	9.19	.011	.28	.034	.86				
8774	9	Chart 3	.417	10.59								
8775	11	Chart 3	.464	11.79	.011	.28	.036	.91				
9768	12	Chart 3	.464	11.79					30	98	55	180
8776	15	Chart 3	.548	13.92	.011	.28	.052	1.32				
9769	17	Chart 3	.577	14.66								
8769	19	Chart 3	.603	15.32	.011	.28	.064	1.63				
8773	27	Chart 3	.709	18.00								
9767	37	Chart 3	.800	20.32	.011	.28	.069	1.75				

NEC: CM • CEC: CM
 UL AWM Style 2919 (30V, 80°C)
 50 Ω Nom. Impedance
 66% Velocity of Prop.
 Conductor DCR (Nom): 15.0 Ω /1000' (49.2 Ω/km)

22 AWG • Polypropylene/LSZH

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • LSZH Jacket												
8777SB	3	Chart 3	.273	6.93	.010	.25	.034	.86	30	98	55	180

NEC: CMG-LS • CEC: CMG-LS
 50 Ω Nom. Impedance
 66% Velocity of Prop.
 Conductor DCR (Nom): 15.0 Ω /1000' (49.2 Ω/km)

TC = Tinned Copper • LSZH = Low Smoke Zero Halogen • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

Individually Shielded Pairs • Plenum



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • FEP/Flamarrest®

Stranded (7 x 30) TC Conductors • FEP Insulation • Individually Beldfoil® Shielded Pairs • 22 AWG TC Drain Wire • Natural Flamarrest Jacket														
82777	3	Chart 3	.237	6.02										Plenum NEC: CMP • CEC: CMP FT6 46 Ω Nom. Impedance 62% Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)
					.011	.28	.017	.43	35	115	76	249		
82778	6	Chart 3	3.14	7.98										

22 AWG • FEP/FEP

Stranded (7 x 30) TC Conductors • FEP Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Red FEP Jacket														
88777	3	Chart 3	.234	5.94										Plenum NEC: CMP • CEC: CMP FT6 50 Ω Nom. Impedance 62% Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)
					.010	.25	.014	.36	31	102	67	220		
88778	6	Chart 3	.309	7.85										

22 AWG • FEP/Fluorocopolymer

Stranded (7 x 30) TC Conductors • FEP Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Red Fluorocopolymer Jacket														
87777	3	Chart 3	.234	5.94										Plenum NEC: CMP • CEC: CMP FT6 46 Ω Nom. Impedance 50% Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)
					.010	.25	.014	.36	31	102	67	220		
87778	6	Chart 3	.309	7.85										

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene

Audio, Control and Instrumentation Cables

Individually Shielded Pairs • RS-485



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • FEP/Flamarrest®

Stranded (7 x 30) TC Conductors • FEP Insulation • Individually Beldfoil® Shielded Pairs • 24 AWG TC Drain Wire • Natural Flamarrest Jacket. Pairs Cabled on a Common Axis to Reduce Diameter.													
82723	2	Black-Red Green-White	.153	3.89	.007	.18	.017	.43	43	141	75	246	Plenum • Non-Conduit NEC: CMP • CEC: CMP FT6 300V 45 Ω Nom. Impedance 66%Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)

22 AWG • FEP/FEP

Stranded (7 x 30) TC Conductors • FEP Insulation • Individually Beldfoil Shielded Pairs • 24 AWG TC Drain Wire • Red FEP Jacket. Pairs Cabled on a Common Axis to Reduce Diameter.													
88723	2	Black-Red Green-White	.148	3.76	.007	.18	.014	.36	35	115	67	220	Plenum • Non-Conduit NEC: CMP • CEC: CMP FT6 300V 45 Ω Nom. Impedance 66%Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)


22 AWG • FEP/Fluorocopolymer

Stranded (7 x 30) TC Conductors • FEP Insulation • Individually Beldfoil Shielded Pairs • 24 AWG TC Drain Wire • Red Fluorocopolymer Jacket. Pairs Cabled on a Common Axis to Reduce Diameter.													
87723	2	Black-Red Green-White	.148	3.76	.007	.18	.014	.36	35	115	67	220	Plenum • Non-Conduit NEC: CMP • CEC: CMP FT6 300V 45 Ω Nom. Impedance 66%Velocity of Prop. Conductor DCR (Nom): 14.7 Ω /1000' (48.2 Ω/km)

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene

Audio, Control and Instrumentation Cables

Individually Shielded Pairs



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

20 AWG • SR-PVC/PVC

Stranded (7 x 28) TC Conductors • Semi-Rigid PVC Insulation • Individually Beldfoil® Shielded Pairs • 22 AWG TC Drain Wire • Chrome PVC Jacket														
9402	2	Black-Red, Green-White	.300	7.62	.010	.25	.041	1.04	55	180	95	312	NEC: CMG • CEC: CMG FT4 UL AWM Style 2464 (300V, 80°C)	

20 AWG • Polypropylene/Polyethylene

Stranded (10 x 32) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Black High-Density Polyethylene Jacket														
9883	3	Chart 3	.340	8.64	.013	.33	.040	1.02	30	98	55	180	NEC: CMG • CEC: CMP FT4 350V	
9886	6	Chart 3	.455	11.56	.013	.33	.045	1.14					50 Ω Nom. Impedance 66% Velocity of Prop Conductor DCR (Nom): 6.4 Ω /1000' (21.0 Ω/km)	

20 AWG • Polypropylene/PVC

Stranded (7 x 28) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • 22 AWG TC Drain Wire • Chrome PVC Jacket														
9873	3	Chart 3	.341	8.66	.015	.38	.035	.89	30	98	55	180	NEC: CM • CEC: CM UL AWM Style 2919 (30V, 80°C) 50 Ω Nom. Impedance 66% Velocity of Prop Conductor DCR (Nom): 10.5 Ω /1000' (34.4 Ω/km)	
9874	6	Chart 3	.445	11.30										
9875	9	Chart 3	.555	14.10										
9876	11	Chart 3	.600	15.24										
9877	12	Chart 3	.617	15.67										
9879	15	Chart 3	.689	17.50	.015	.38	.052	1.32						


18 AWG • Polypropylene/PVC

Stranded (19 x 30) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • 20 AWG TC Drain Wire • Chrome PVC Jacket														
9773	3	Chart 3	.404	10.26	.019	.48	.035	.89	30	98	55	180	NEC: CM • CEC: CM UL AWM Style 2919 (30V, 80°C) 50 Ω Nom. Impedance 66% Velocity of Prop Conductor DCR (Nom): 10.5 Ω /1000' (34.4 Ω/km)	
9774	6	Chart 3	.560	14.22										
9775	9	Chart 3	.655	16.64										
9776	12	Chart 3	.735	18.67										
9777	15	Chart 3	.819	20.80										

TC = Tinned Copper • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

Overall Braid Shielded



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • PVC/PVC

Solid TC Conductors • PVC Insulation • Polyester Tape • 88% TC Braid Shielding • 22 AWG TC Drain Wire • Black PVC Jacket

8437	2	Black-Red	.200	5.08	.015	.38	.025	.64	48	157	85	279	NEC CMG • CEC: CMG FT4 UL AWM Style 2095 (300V, 80°C)
------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	----------------------------------------------------------

Stranded (7 x 30) TC Conductors • PVC Insulation • Polyester Tape • 86% TC Braid Shielding • 22 AWG TC Drain Wire • Black PVC Jacket

8441	1	Black-Red	.257	6.53	.022	.56	.025	.64	49	161	86	282	NEC CMG • CEC: CMG FT4 UL AWM Style 2095 (300V, 80°C)
------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	----------------------------------------------------------

18 AWG • Rubber/PVC

Stranded (7 x 30) TC Conductors • Rubber Insulation • Polyester Tape • 73% TC Braid Shielding • Chrome PVC Jacket

8208	1	Red-White	.257	6.53	.022	.56	.025	.64	46	151	77	253	300V, 80°C
------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	------------

Combination Unshielded and Shielded



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Polyethylene/PVC


Stranded (7 x 30) TC Conductors • Polyethylene Insulation • One Unshielded Pair • One 62% TC Braid Shielded Pair • Chrome PVC Jacket

8732	2	Black-Clear	.206 x .332	5.23 x 8.43	.020	.51	.030	.76	21	69	37	121	NEC: CM • CEC: CM UL AWM Style 2094 (300V, 60°C)
------	---	-------------	-------------	-------------	------	-----	------	-----	----	----	----	-----	-----------------------------------------------------

TC = Tinned Copper • PVC = Polyvinyl Chloride

Audio, Control and Instrumentation Cables

Overall Spiral Shield



- NEC: CMG
- CEC: CMG FT4

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

Stranded TC Conductors • PVC Insulation • 85% Spiral Wrapped Tinned Copper Shielding • Chrome PVC Jacket

22 AWG • 7 x 30 • PVC/PVC

8737	1	Black-Red	.180	4.57	.015	.38	.025	.64	40	131	70	230	UL AWM Style 2095 (300V, 80°C)
------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	--------------------------------

20 AWG • 7 x 28 • PVC/PVC

8759	1	Black-Red	.199	5.05	.016	.41	.025	.64	47	154	79	259	UL AWM Style 2095 (300V, 80°C)
------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	--------------------------------

18 AWG • 7 x 26 • PVC/PVC

8790	1	Red-White	.241	6.12	.022	.56	.028	.71	53	174	92	302	300V, 60°C
------	---	-----------	------	------	------	-----	------	-----	----	-----	----	-----	------------


16 AWG • 19 x 29 • PVC/PVC

8780	1	Black-White	.280	7.11	.023	.58	.030	.76	57	187	98	322	300V, 60°C
------	---	-------------	------	------	------	-----	------	-----	----	-----	----	-----	------------

TC = Tinned Copper • PVC = Polyvinyl Chloride

Special Audio, Communication and Instrumentation Cables

Combination and Special Shielding



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

25 AWG • Polyethylene/PVC

Stranded (7 x 32) TC Conductors • Polyethylene Insulation • Red-Black Pair Individually Shielded + Overall Beldfoil® Shielding • 25 AWG TC Drain Wire • Chrome PVC Jacket. 3 Copper, 4 Copper-Covered Steel Strands in Each Conductor • Pairs Cables on Common Axis to Reduce Diameter.

8434	2	Black-Red, Green-White	.165	4.19	.013	.33	.020	.51	25	82	49	131	400V, 80°C
------	---	------------------------	------	------	------	-----	------	-----	----	----	----	-----	------------

22 AWG • PVC/PVC

Stranded (7 x 30) TC Conductors • PVC Insulation • One Unshielded Single Conductor • One Pair Beldfoil Shielded • 22 AWG TC Drain Wire • Chrome PVC Jacket

9685	1.5	Black-White, Brown	.199	5.05	.013	.33	.032	.81	60	197	99	325	NEC: CM Meets NEC Article 800 300V, 80°C
------	-----	--------------------	------	------	------	-----	------	-----	----	-----	----	-----	------------------------------------------------

22 AWG • Polypropylene/PVC

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • One Unshielded Pair • One Beldfoil Shielded Pair • 24 AWG TC Drain Wire • Chrome PVC Jacket. See Technical Bulletin T/8-21 Before Planning High- And Low-Level Circuits in the Same Cable • Pairs Cables on Common Axis to Reduce Diameter.

8730	2	Black-Red, Green-White	.205	5.21	.008	.20	.030	.76	34	113	67	220	200V, 80°C
8724	2	Black-Red, Green-White	.185	4.19	.008	.20	.019	.48	34	113	67	220	NEC: CM • CEC: CM 300V, 80°C W-1

22 AWG • Polypropylene/PVC

Stranded (7 x 30) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs • Polyester Film Over Each Shield • 24 AWG TC Drain Wire for Each Pair • Chrome PVC Jacket. Pairs Cables on Common Axis to Reduce Diameter.

8728	2	Black-Red, Green-White	.215	5.46	.010	.25	.028	.71	35	115	62	203	NEC: CM • CEC: CM UL AWM Style 2717 (80°C)
------	---	------------------------	------	------	------	-----	------	-----	----	-----	----	-----	-----------------------------------------------

TC = Tinned Copper • PVC = Polyvinyl Chloride

Special Audio, Communication and Instrumentation Cables

Combination and Special Shielding



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

20 AWG • Polyethylene/PVC

Stranded (7 x 28) TC Conductors • Polyethylene Insulation • One Unshielded Single Conductor • One Pair Beldfoil® Shielded • 20 AWG TC Drain Wire • Chrome PVC Jacket													
8763	1.5	Black-Red, Clear	.210	5.33	.014	.36	.028	.71	26	85	48	157	350V, 80°C

20 AWG • PVC/PVC

Stranded (7 x 28) TC Conductors • PVC Insulation • One Unshielded Pair • One Beldfoil Shielded Pair • 22 AWG TC Drain Wire • Chrome PVC Jacket. See Technical Bulletin T/8-21 Before Planning High- And Low-Level Circuits in the Same Cable • Pairs Cables on Common Axis to Reduce Diameter.													
8722	2	Black-Red, Green-White	.226	5.74	.015	.38	.028	.71	60	197	99	325	NEC: CMG • CEC: CMG FT4 350V, 80°C VW-1

20 AWG • Polypropylene/PVC

Stranded (7 x 28) TC Conductors • Polypropylene Insulation • Individually Beldfoil Shielded Pairs Polyester Film Over Each Shield • 22 AWG TC Drain Wire for Each Pair • Chrome PVC Jacket. See Technical Bulletin T/8-21 Before Planning High- And Low-Level Circuits in the Same Cable • Pairs Cables on Common Axis to Reduce Diameter.													
8725	4	Black-Red, Green-White, White/Red-White/Black White/Green-White/Yellow	.345	8.76	.015	.38	.030	.76	27	89	49	161	NEC: CM • CEC: CM 400V, 105°C VW-1

20 AWG and 18 AWG • Polyethylene/PVC

Stranded (7 x 28 and 16 x 30) TC Conductors • Polyethylene Insulation • Unshielded 18 AWG Pair • Beldfoil Shielded 20 AWG Pair • 22 AWG Stranded TC Drain Wire • Beige PVC Jacket													
9155	1 (20 AWG)	Black-Red	.262	6.65	.020	.51	.031	.79	24	79	46	151	NEC: CM • CEC: CM Meets NEC Article 800 UL AWM Style 2094 (300V, 60°C)
	1 (18 AWG)	Green-White			.019	.48			18	22			

TC = Tinned Copper • PVC = Polyvinyl Chloride

Computer Cables for RS-232 Applications

300V 80°C • Overall Beldfoil® Shield



- NEC: CMG
- CEC: CMG FT4

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • SR-PVC/PVC

Stranded (7 x 32) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Chrome PVC Jacket														
9501	1	Chart 3	.156	3.96	.011	.28	.032	.81	40	131	74	233		
9502	2	Chart 3	.222	5.64										
9503	3	Chart 3	.232	5.89										
9504	4	Chart 3	.265	6.73										
9505	5	Chart 3	.289	7.34										
9506	6	Chart 3	.289	7.34	.011	.28	.032	.81						
9507	7	Chart 3	.294	7.47										
9508	8	Chart 3	.324	8.23					30	98	50	164		
9509	9	Chart 3	.334	8.48										
9510	10	Chart 3	.368	9.34										
9515	15	Chart 3	.417	10.6	.011	.28	.034	.86						
9519	19	Chart 3	.448	11.4										
9525	25	Chart 3	.503	12.8	.011	.28	.045	1.14						
9550	50	Chart 3	.708	18.0	.011	.28	.054	1.37						

UL AWM Style 2464
CSA AWM I A
MSHA* (9502)
75 Ω Nominal Impedance
60% Velocity of Prop.
Conductor DCR (Nom): 24.0/1000' (78.7 Ω/km)
Shield DCR (Nom): 18.0 Ω/1000' (59.1 Ω/km)

Plenum • Overall Beldfoil Shield



- NEC: CMP
- CEC: CMP FT6

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance			
			Inch	mm	inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield	
									pF/Ft	pF/m	pF/Ft	pF/m

24 AWG • FEP/Flamarrest®

Stranded (7 x 32) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Natural Flamarrest Jacket														
82641	1	Chart 3	.106	2.69	.006	.15	.014	.36	31	102	59	194		
82502	2	Chart 3	.162	4.11										
82503	3	Chart 3	.169	4.29	.006	.15	.014	.36						
82504	4	Chart 3	.193	4.90					25	82	45	148		
82505	5	Chart 3	.196	4.98	.006	.15	.014	.38						
82506	6	Chart 3	.209	5.31										
82509	9	Chart 3	.246	6.25	.006	.15	.015	.38	23	75	42	138		

24 AWG • FEP/FEP

Stranded (7 x 32) TC Conductors • FEP Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Red FEP Jacket														
88641	1	Chart 3	.106	2.69	.006	.15	.014	.36	31	102	59	194		
89503	3	Chart 3	.175	4.45										
89504	4	Chart 3	.192	4.88	.006	.15	.014	.36	21	69	40	131		
89505	5	Chart 3	.197	5.00										


TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Low-Capacitance Computer Cables for RS-232 and RS-422 Applications

Low Capacitance • Overall Beldfoil® Shield



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

28 AWG • Datalene®/PVC

Stranded (7 x 36) TC Conductors • Datalene Insulation • Overall Beldfoil Shielding • 28 AWG TC Drain Wire • Chrome PVC Jacket														
8132FO	2	Chart 5	.215	5.46										
8134FO	4	Chart 5	.270	6.86										
8135FO	5	Chart 5	.280	7.11	.015	.38	.035	.89	11.0	36.1	20.0	65.6		
8138FO	8	Chart 5	.310	7.88										
8142FO	12.5	Chart 5	.385	9.78										

NEC: CL2
 UL AWM Style 2919 (30V, 80°C)
 120 Ω Nom. Impedance
 78% Velocity of Prop.
 Conductor DCR (Nom): 65.0/1000' (213.0 Ω/km)
 Shield DCR (Nom): 23.1 Ω/1000' (75.8 Ω/km)

24 AWG • Polyethylene/PVC

Stranded (7 x 32) TC Conductors • Polyethylene Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Chrome PVC Jacket														
9680	3	Chart 5	.282	7.16										
9681	4	Chart 5	.307	7.80										
9682	6	Chart 5	.342	8.69	.016	.41	.035	.89	15.5	50.8	27.5	90.2		
9683	9	Chart 5	.397	10.10										
9684	12.5	Chart 5	.445	11.30										

NEC: CM • CEC: CM
 UL AWM Style 2919
 100 Ω Nom. Impedance
 66% Velocity of Prop.
 Conductor DCR (Nom): 24.0/1000' (78.7 Ω/km)

24 AWG • Datalene/PVC

Stranded (7 x 32) TC Conductors • Datalene Insulation • Overall Beldfoil Shielding • 24 AWG TC Drain Wire • Chrome PVC Jacket														
1419A	2	Chart 5	.248	6.30										
1420A	3	Chart 5	.261	6.63										
1421A	4	Chart 5	.280	7.11	.013	.33	.035	.89	15.5	50.8	27.5	90.2		
1422A	5	Chart 5	.294	7.47										
1423A	6	Chart 5	.319	8.10										
1424A	12.5	Chart 5	.418	10.62										
1425A	15	Chart 5	.473	12.01	.013	.33	.040	1.02						


NEC: CM • CEC: CM
 CEC: FT! (1419A, 1420A)
 UL AWM Style 2919
 100 Ω Nom. Impedance
 78% Velocity of Prop.
 Conductor DCR (Nom): 24.0/1000' (78.7 Ω/km)

TC = Tinned Copper • PVC = Polyvinyl Chloride

Low-Capacitance 100 Ohm Computer Cables for RS-422 and Digital Audio Applications

Individually Shielded Pairs • RS-422 and Digital Audio

- NEC: CM
- CEC: CM



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Datalene®/PVC

Stranded (7 x 32) TC Conductors • Datalene Insulation • Individually Beldfoil® Shielded Pairs • Chrome PVC Jacket														
9729	2	Chart 3	.266	6.76										
9730	3	Chart 3	.334	8.48										
9728	4	Chart 3	.363	9.22	.019	.48	.048	1.22						
9731	6	Chart 3	.421	10.69										
9732	9	Chart 3	.488	12.40										
9734	12	Chart 3	.575	14.61	.019	.48	.063	1.60	12.5	41.0	23.2	76.1	UL AWM Style 2493 (300V, 60°C) 100 Ω Nom. Impedance 76% Velocity of Prop. Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)	
9735	15	Chart 3	.639	16.23										
9736	17	Chart 3	.671	17.04	.019	.48	.065	1.65						
9737	19	Chart 3	.671	17.04										
9738	27	Chart 3	.797	20.24										

Paired Cable

TC = Tinned Copper • PVC = Polyvinyl Chloride



Low-Capacitance 100 Ohm Computer Cables for RS-422 and Digital Audio Applications

Plenum • Individually Shielded Pairs • RS-232, RS-422, and Digital Audio

- NEC: CMP
- CEC: CMP FT6



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • FEP/Fluorocopolymer

Stranded (7 x 32) TC Conductors • Foam FEP Insulation • Individually Beldfoil® Shielded Pairs • 24 AWG TC Drain Wire • Gray Fluorocopolymer Jacket													
89729	2	Chart 5	.261	6.63									Plenum 300V 100 Ω Nom. Impedance 76% Velocity of Prop. Conductor DCR (Nom): 23.3 Ω /1000' (76.4 Ω/km)
89730	3	Chart 5	.278	7.06	.019	.48	.017	.43	13.5	44	22.5	73.8	
89728	4	Chart 5	.307	7.80									
89731	6	Chart 5	.361	9.17	.019	.48	.014	.36					
89732	9	Chart 5	.429	10.90	.019	.48	.016	.41					

24 AWG • FEP/Flamarrest®


Stranded (7 x 32) TC Conductors • Foam FEP Insulation • Individually Beldfoil® Shielded Pairs • 24 AWG TC Drain Wire • Natural Flamarrest Jacket													
82729	2	Chart 5	.255	6.48	.019	.48	.014	.36	13.5	44	22.5	73.8	300V 100 Ω Nom. Impedance 76% Velocity of Prop. Conductor DCR (Nom): 23.3 Ω /1000' (76.4 Ω/km)

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene



Low-Capacitance Computer Cables for RS-232 Applications

Overall Foil/Braid Shield • RS-232



- NEC: CMG
- CEC: CMG FT4

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • SR-PVC/PVC

Stranded (7 x 30) TC Conductors • Semi-Rigid Insulation • Overall Beldfoil® + 65% TC Braid Shield • Chrome PVC Jacket														
8302	2	Chart 3	.260	6.60	.011	.28	.035	.89	40	131	72	236		
8303	3	Chart 3	.270	6.86										
8304	4	Chart 3	.320	8.13										
8305	5	Chart 3	.322	8.18	.011	.28	.035	.89						
8306	6	Chart 3	.348	8.84										
8307	7	Chart 3	.348	8.84										
8308	8	Chart 3	.384	9.75					35	115	63	207	UL AWM Style 2464 (300V, 80°C) 70 Ω Nom. Impedance 60% Velocity of Prop. Conductor DCR (Nom): 15.0 Ω /1000' (49.2 Ω/km)	
8310	10	Chart 3	.440	11.18	.011	.28	.040	1.02						
8312	12	Chart 3	.455	11.56										
8315	15	Chart 3	.502	12.75										
8318	18	Chart 3	.535	13.59	.011	.28	.045	1.14						
8325	25	Chart 3	.620	15.75										


TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Low-Capacitance Computer Cables for RS-232 and RS-422 Applications

Overall Foil/Braid Shield • RS-232



- NEC: CMG
- CEC: CMG FT4

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	


24 AWG • SR-PVC/PVC

Stranded (7 x 32) TC Conductors • Semi-Rigid PVC Insulation • Overall Beldfoil® + 65% TC Braid Shield • Chrome PVC Jacket														
8332	2	Chart 5	.250	6.35										
8333	3	Chart 5	.265	6.73										
8334	4	Chart 5	.288	7.32										
8335	5	Chart 5	.295	7.49	.011	.28	.035	.89						
8336	6	Chart 5	.310	7.87										
8337	7	Chart 5	.321	8.15					30	98	50	165		
8340	10	Chart 5	.385	9.78										
8342	12.5	Chart 5	.405	10.29										
8345	15	Chart 5	.445	11.30	.011	.28	.040	1.02						
8348*	18	Chart 5	.480	12.19										
8355*	25	Chart 5	.550	13.97	.011	.28	.045	1.14						

UL AWM Style 2464 (300V, 80°C)
CSA AWM I A
75 Ω Nom. Impedance
60% Velocity of Prop.
Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)

*Not Rated for CSA AWM I A, 300 V, 80°C.

Overall Foil/Braid Shield • RS-232/422



- NEC: CM
- CEC: CM

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Polyethylene/PVC

Stranded (7 x 32) TC Conductors • Polyethylene Insulation • Overall Beldfoil + 65% TC Braid Shield • 24 AWG Stranded TC Drain Wire • Chrome PVC Jacket														
9829	2	Chart 5	.291	7.39										
9830	3	Chart 5	.305	7.74										
9831	4	Chart 5	.330	8.38										
9832	5	Chart 5	.338	8.59										
9839	6	Chart 5	.364	9.25	.016	.41	.035	.89	15.5	50.9	27.5	90.2		
9833	7	Chart 5	.370	9.40										
9834	9	Chart 5	.419	10.64										
9835	10	Chart 5	.451	11.46										
9836	12	Chart 5	.464	11.79										
9837	18	Chart 5	.567	14.40										

UL AWM Style 2919 (30V, 80°C)
100 Ω Nom. Impedance
66% Velocity of Prop.
Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)


TC = Tinned Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Low-Capacitance Computer Cables for RS-232 and RS-422 Applications

Overall Foil/Braid Shield • RS-232/422



- NEC: CM
- CEC: CM

Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Datalene®/PVC

Stranded (7 x 32) TC Conductors • Datalene Insulation • Overall Beldfoil® + 65% TC Braid Shield • 24 AWG Stranded TC Drain Wire • Chrome PVC Jacket												
8102	2	Chart 5	.270	6.86								
8103	3	Chart 5	.283	7.19								
8104	4	Chart 5	.302	7.67								
8105	5	Chart 5	.316	8.03								
8106	6	Chart 5	.341	8.66	.013	.33	.035	.89				
8107	7	Chart 5	.341	8.66					12.5	41	22	72.2
8108	8	Chart 5	.370	9.40								
8110	10	Chart 5	.427	10.85								
8112	12.5	Chart 5	.440	11.18								
8115	15	Chart 5	.495	12.57	.015	.38	.040	1.02				
8118	18	Chart 5	.537	13.64	.015	.38	.048	1.22				
8125	25	Chart 5	.632	16.05	.015	.38	.050	1.27				


UL AWM Style 2919 (30V, 80°C)
100 Ω Nom. Impedance
78% Velocity of Prop. Conductor DCR
(Nom): 24.0 Ω /1000' (78.7 Ω/km)

TC = Tinned Copper • PVC = Polyvinyl Chloride

Low-Capacitance Computer Cables for RS-232, RS-422, and RS-485 Applications

Overall Foil/Braid Shield • RS-232/422

• NEC: CL2




Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

28 AWG • Polypropylene/PVC

Stranded (7 x 36) TC Conductors • Polypropylene Insulation • Overall Beldfoil® + 90% TC Braid Shield • 28 AWG Stranded TC Drain Wire • Chrome PVC Jacket														
9804	2	Chart 3	.214	5.44	.009	.23	.042	1.07						
9805	3	Chart 3	.222	5.64										
9806	4	Chart 3	.237	6.02										
9807	5	Chart 3	.240	6.10										
9808	7	Chart 3	.256	6.50										
9809	9	Chart 3	.290	7.37	.009	.23	.035	.89	15.5	50.9	27.5	90.2	UL AWM Style 2960 (30V, 60°C) 100 Ω Nom. Impedance 66% Velocity of Prop. Conductor DCR (Nom): 64.9 Ω /1000' (212.9 Ω/km)	
9812	12	Chart 3	.319	8.10										
9813	13	Chart 3	.336	8.53										
9819	18	Chart 3	.365	9.27										
9825	25	Chart 3	.429	10.90										
9814	31	Chart 3	.462	11.73	.009	.23	.040	1.02						

Overall Foil/Braid Shield • RS-232/485

• NEC: CL2



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

28 AWG • Datalene®/PVC


Stranded (7 x 36) TC Conductors • Datalene Insulation • Overall Beldfoil + 65% TC Braid Shield • 28 AWG Stranded TC Drain Wire • Chrome PVC Jacket														
8132	2	Chart 5	.220	5.59										
8133	3	Chart 5	.270	6.86										
8134	4	Chart 5	.290	7.37										
8135	5	Chart 5	.300	7.62										
8138	8	Chart 5	.330	8.38	.015	.38	.039	.99	11.0	36.1	20.0	65.6	UL AWM Style 2919 (30V, 80°C) 120 Ω Nom. Impedance 78% Velocity of Prop. Conductor DCR (Nom): 65.0 Ω /1000' (213.0 Ω/km)	
8142	12.5	Chart 5	.375	9.53	.015	.38	.035	.89						
8148	18	Chart 5	.465	11.81	.015	.38	.045	1.14						
8155	25	Chart 5	.565	14.35	.015	.38	.044	1.12						

TC = Tinned Copper • PVC = Polyvinyl Chloride

Low-Capacitance Computer Cables for RS-485 Applications

Overall Foil/Braid Shield •
RS-485 • DMX512

- NEC: CM
- CEC: CM



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Polyethylene/PVC

Stranded (7 x 32) TC Conductors • Polyethylene Insulation • Overall Beldfoil® + 90% TC Braid Shield • 24 AWG Stranded TC Drain Wire • Chrome PVC Jacket													
9841	1	Chart 5	.232	5.89	.023	.58	.035	.89					UL AWM Style 2919 (30V, 80°C) ANSI E1.11 DMX512 120 Ω Nom. Impedance 66% Velocity of Prop. Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)
9842	2	Chart 5	.340	8.64					12.8	42.0	23.0	75.5	
9843	3	Chart 5	.360	9.14	.022	.56	.035	.89					
9844	4	Chart 5	.390	9.91									

Plenum • Overall Foil/
Braid Shield • RS-485

- NEC: CMP
- CEC: CMP FT6



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • FEP/Flamarrest®

Stranded (7 x 32) TC Conductors • Foam FEP Insulation • Overall Beldfoil + 90% TC Braid Shield • 24 AWG Stranded TC Drain Wire • Natural Flamarrest Jacket													
82841	1	Chart 5	.204	5.18	.025	.64	.015	.38					Plenum 300V 120 Ω Nom. Impedance 76% Velocity of Prop. Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)
82842	2	Chart 5	.273	6.93	.019	.48	.015	.38	12	39.4	22	72.2	

24 AWG • FEP/FEP

Stranded (7 x 32) TC Conductors • Foam FEP Insulation • Overall Beldfoil + 90% TC Braid Shield • 24 AWG Stranded TC Drain Wire • Red FEP Jacket													
89841	1	Chart 5	.202	5.13	.025	.64	.014	.36					Plenum 300V 120 Ω Nom. Impedance 76% Velocity of Prop. Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)
89842	2	Chart 5	.305	7.75	.023	.58	.014	.36	12	39.4	22	72.2	

TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride



Computer POS Cables

Overall Foil/Braid Shield • RS-485 • POS



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Braid	Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm		Cond. - Cond.		Cond. - Shield		
										pF/Ft	pF/m	pF/Ft	pF/m	

22 AWG • Polyethylene/PVC

Solid TC or BC Conductors • Polyethylene Insulation • Overall Beldfoil® + TC Braid Shield • 22 AWG Solid TC Drain Wire • Black PVC Jacket														
1268A	2 TC	Note 1	.270	6.86	.019	.48	.033	.84	90%	15.5	50.9	27.5	90.2	NEC: CM • CEC: CM UL AWM Style 2582 (150V, 60°C) 66%Velocity of Prop.
9855	2 TC	Note 1	.270	6.86				58%						
9696	2 BC	Note 2	.290	7.37	.018	.44	.033	.84	58%	16.0	52.5	27.5	90.2	

22 AWG • FEP/PVC

Solid TC or BC Conductors • FEP Insulation • Overall Beldfoil + TC Braid Shield • 22 AWG Solid TC Drain Wire • Black PVC Jacket														
1269A	2 TC	Note 1	.240	6.10	.016	.41	.016	.43	90%					Plenum • Non-conduit NEC: CMP • CEC: CMP FT6 69.5%Velocity of Prop.
89855	2 TC	Note 1	.272	6.91	.016	.41	.016	.41	58%	15.5	50.9	27.0	88.6	
89696	2 BC	Note 2	.262	6.65	.020	.51	.016	.41						

Note 1: Red-Blue, Black-Yellow.


Note 2: Blue-White with Blue Stripe, Orange-White with Orange Stripe.

BC = Bare Copper • TC = Tinned Copper • FEP = Fluorinated Ethylene Propylene • PVC = Polyvinyl Chloride

Low-Capacitance Computer Cables for RS-232, RS-422, and Digital Audio Applications

Individually Shielded Pairs with Overall Foil/Braid Shield

- NEC: CM
- CEC: CM



Part No.	Pairs	Color Code	OD (Nom)		Insulation Thickness		Jacket Thickness		Capacitance				Additional Features/Ratings
			Inch	mm	Inch	mm	Inch	mm	Cond. - Cond.		Cond. - Shield		
									pF/Ft	pF/m	pF/Ft	pF/m	

24 AWG • Datalene®/PVC

Stranded (7 x 32) TC Conductors • Datalene Insulation • Individually Beldfoil® Shielded Pairs + Overall 65% TC Braid Shielding • 24 AWG TC Drain Wire • Chrome PVC Jacket												
8162	2	Chart 3	.343	8.71								
8263	3	Chart 3	.359	9.12								
8164	4	Chart 3	.388	9.86								
8165	5	Chart 3	.413	10.49	.019	.48	.048	1.22				
8166	6	Chart 3	.446	11.33								
8167	7	Chart 3	.446	11.33					12.5	41	22	72.2
8168	8	Chart 3	.479	12.17								
8170	10	Chart 3	.584	14.83	.019	.48	.063	1.60				
8175	15	Chart 3	.665	16.89								
8178	18	Chart 3	.686	17.42	.019	.48	.065	1.65				
8185	25	Chart 3	.822	20.88								

UL AWM Style 2493 (60°C) VW-1
 100 Ω Nom. Impedance
 78% Velocity of Prop.
 Conductor DCR (Nom): 24.0 Ω /1000' (78.7 Ω/km)

TC = Tinned Copper • PVC = Polyvinyl Chloride

GreenChoice™ LSZH Cables

GreenChoice non-halogen cables designed for industrial application are LSZH-jacketed. Versions of some of our most popular and reliable cables. These eco-friendly cables are fully recyclable while

offering the same AWM and UL ratings as their Belden Classics counterparts.

The GreenChoice product line meets the requirements of LEED Pilot Credit 54 for

up to 2 LEED points per installation to help builders achieve the next level of LEED certification. In addition, LEED certification can lead to tax breaks on the building dependent on state law.

LSZH

- ROHS Compliant
- REACH Compliant
- CA Prop 65 Compliant
- WEEE Compliant
- UL CMG
- CE Compliant

Part No.	Conductors	AWM Style	OD (Nom)		Capacitance (Nom)			
					Cond. - Cond.		Cond. - Shield	
			Inch	mm	pF/Ft	pF/m	pF/Ft	pF/m

Stranded Tinned Copper Conductors • Overall Beldfoil® Shielding • Black or Chrome LSZH Jacket

24 AWG

8777NH	3	21088	.273	6.93	30.0	98.4	55.0	180.4
9841NH	1	21088	.266	6.76	14.5	47.6	26.0	85.3
8641NH	1	21305	.168	4.27	22.0	72.2	42.0	137.8
9842NH	2	21088	.323	8.20	13.8	45.1	24.8	81.2
9729NH	2	21088	.266	6.76	12.5	41.0	23.3	76.3

22 AWG

8761NH	1	21305	.175	4.45	24.0	78.7	47.0	154.2
9462NH	1	21307	.186	4.72	25.0	82.0	45.0	147.6
8723NH	2	—	.196	4.98	35.0	114.8	62.0	203.4

20 AWG

8762NH	1	21305	.204	5.18	27.0	88.6	49.0	160.8
9154NH	1	21307	.198	5.03	27.0	88.6	48.5	159.1

18 AWG

8760NH	1	21305	.220	5.64	29.8	97.6	53.5	175.5
--------	---	-------	------	------	------	------	------	-------

16 AWG

8719NH	1	21310	.30	7.62	26.0	85.3	46.8	153.4
--------	---	-------	-----	------	------	------	------	-------

Stranded Tinned Copper Conductors • Unshielded • Black or Chrome LSZH Jacket

22 AWG

8443NH	1.5	21307	.172	4.37	15.0	49.2	—	—
--------	-----	-------	------	------	------	------	---	---

18 AWG

8461NH	1	—	.21	5.33	15.5	50.9	—	—
9740NH	1	21307	.21	5.33	17.5	57.4	—	—
9156NH	2	21307	.333	8.46	17.5	57.4	—	—

16 AWG

8471NH	1	21305	.274	6.96	17.0	55.8	—	—
--------	---	-------	------	------	------	------	---	---

TC = Tinned Copper • LSZH = Low Smoke Zero Halogen





Portable Cordage

Table of Contents

Portable Cordage	Page No.
Introduction	232
2-Conductor	233
SPT-1 Type: PVC Parallel Lamp Cord	233
SPT-2 Type: PVC Parallel Lamp Cord	133
SP-1 Type: Rubber Parallel Lamp Cord	233
HPN Type: CPE Heater Cord	233
SJ Type: Rubber Jacket	234
SJO Type: Oil-Resistant Rubber Jacket	234
SJTOW Type: Belflex® PVC Jacket	234
SO Type: Oil-Resistant Rubber Jacket	234
STOW Type: Belflex PVC Jacket	234
SV Type: Rubber Jacket	234
SVT Type: PVC Jacket	234
3-Conductor	235
S Type: Rubber Jacket	235
SO Type: Oil-Resistant Rubber Jacket	235
SJ Type: Rubber Jacket	235
SJO Type: Oil-Resistant Rubber Jacket	235
SJT Type: PVC Jacket	235
SJT Type: PVC Jacket, Shielded	236
SJT Type: PVC Jacket Low Leakage Power Cord	236
SJTOW Type: Belflex PVC Jacket	236
STOW Type: Belflex PVC Jacket	236
SV Type: Rubber Jacket	236
SVT Type: PVC Jacket	236
SVT Type: PVC Jacket, Shielded	236
4-Conductor	237
Rubber Jacket	237
SO Type: Oil-Resistant Rubber Jacket	237
5-Conductor: Rubber Jacket	237
Multi-Conductor: SO Type: Oil-Resistant Rubber Jacket	237
UL Cordage Types: Designation, Construction and Rating Chart	238

Introduction

Belden® portable cordage products are available in a wide assortment of styles, lengths, and thicknesses. Products offered include 2-, 3-, 4- and 5-conductor as well as multi-conductor constructions. Jacket options include PVC, Rubber, Oil-Resistant Rubber and Belflex®. Belflex is a premium PVC jacket compound (Class 43) that is superior to standard PVC for flexibility and durability.

Belden portable cordage is listed by Underwriters Laboratories Inc. (UL). This approval signifies that Underwriters Laboratories Inc. has approved all elements of the cordage as meeting their applicable construction and performance standards. Where indicated, "Certified to CSA Standards" means that Belden portable cordage has been certified by CSA as meeting their Label Service or Re-examination Service requirements. Certification under the applicable CSA Standards has been made mandatory by most provincial or municipal authorities in Canada.

If you have a new or unusual application or you cannot find portable cordage in this catalog section that meets your technical requirements, contact Technical Support at 1-800-BELDEN-1.

Manufacturer's Identification

Identification of the flexible cord is provided by our UL and CSA file numbers or printed name on the cord jacket.

UL/CSA File Numbers

UL: E-3462
 CSA: LL-7874

Portable Cordage Packaging

Belden's unique UnReel® cable dispenser is available for many of the portable cordage products listed in this section.

Color Code Comparison by Function

Color Coding		Function
International	North American Standards	
Light Blue	White	N-Neutral
Brown	Black	L-Live
Green/Yellow	Green or Green/Yellow	E-Earth or Ground

PVC = Polyvinyl Chloride

2-Conductor

UL/CSA Types: SPT -1, SPT -2, SP-1, HPN

Parallel Cordage



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness	
			Inch	mm	Inch	mm

Type SPT-1 • PVC Insulation • 300V, 60°C • Parallel Lamp Cord

BC Conductors • Brown, Black, White, or Silver Insulation • UL/CSA Listed • One Conductor Polarity Ribbed						
19122	18	42 x 34	.110 x .207	2.79 x 5.26	.032	.81
8888*	18	42 x 34	.110 x .207	2.79 x 5.26	.032	.81

Type SPT-2 • PVC Insulation • 300V, 60°C • Parallel Lamp Cord

BC Conductors • Brown or Black Insulation • UL/CSA Listed • One Conductor Polarity Ribbed						
19123	18	42 x 34	.144 x .277	3.66 x 7.04	.049	1.24
19126	16	65 x 34	.155 x .299	3.94 x 7.59	.048	1.22

Type SP-1 • Rubber Insulation • 300V, 60°C • Parallel Lamp Cord

BC Conductors • Black Insulation • UL Listed • One Conductor Polarity Ribbed						
19115	18	41 x 34	.123 x .227	3.12 x 5.77	.035	.89

Type HPN • CPE Insulation • 300V, 90°C • Parallel Heater Cord


BC Conductors • Black Insulation • UL/CSA Listed						
19405	18	41 x 34	.140 x 2.76	3.56 x 7.01	.047	1.18
19404	16	105 x 36	.152 x .300	3.86 x 7.62	.047	1.18

*Not CSA Listed.

BC = Bare Copper • CPE = Chlorinated Polyethylene • PVC = Polyvinyl Chloride

2-Conductor

UL/CSA Types: SJ, SJO, SJTOW, SO, STOW, SV, SVT



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Type SJ • Rubber Jacket • 300V, 60°C

BC Conductors • Paper Tape Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White								
8478	18	42 x 34	.290	7.37	.032	.81	.035	.89
8472	16	65 x 34	.315	8.00	.033	.84	.035	.89

Type SJO • Oil-Resistant Rubber Jacket • 300V, 90°C

BC Conductors • Paper Tape Separator • Smooth Matte Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White								
19227	18	16 x 30	.290	7.37	.031	.79	.035	.89
19228	16	26 x 30	.315	8.00	.031	.79	.035	.89

Type SJTOW • Belflex® Premium PVC Jacket • 300V, 105°C

BC Conductors • Paper Tape Separator • Smooth Matte Black Jacket • UL/CSA Listed • VW-1 • International Conductor Color Code: Light Blue, Brown								
19506	18	42 x 34	.290	7.37	.032	.81	.035	.89
19507	16	65 x 34	.319	8.10	.033	.84	.037	.94
19508	14	41 x 30	.348	8.84	.033	.84	.032	.81

Type SO • Oil-Resistant Rubber Jacket • 600V, 90°C

BC Conductors • Smooth Black Jacket • Cotton Serve Separator or Paper Tape (12 AWG Only) • UL/CSA Listed • Conductor Color Code: Black, White								
19204	18	42 x 34	.360	9.14	.032	.81	.065	1.65
19203	16	65 x 34	.385	9.78	.033	.84	.065	1.65
19202	14	41 x 30	.523	13.28	.048	1.22	.085	2.16
19201	12	65 x 30	.610	15.49	.051	1.30	1.00	2.54

Type STOW • Belflex Premium PVC Jacket • 600V, 105°C

BC Conductors • Paper Tape Separator • Smooth Black Jacket • UL/CSA Listed • VW-1 • International Conductor Color Code: Light Blue, Brown								
19500	18	42 x 34	.360	9.14	.032	.81	.070	1.78
19501	16	65 x 34	.386	9.80	.033	.84	.070	1.78
19502	14	41 x 30	.524	13.31	.049	1.24	.089	2.26

Type SV • Rubber Jacket • 300V, 60°C • Serrated Jacket

BC Conductors • Cotton Serve Separator • Serrated Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White								
8452	18	42 x 34	.245	6.22	.017	.43	.037	.94

Type SV • Rubber Jacket • 300V, 60°C • Smooth Jacket

BC Conductors • Cotton Serve Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White								
19120	18	42 x 34	.245	6.22	.017	.43	.037	.94


Type SVT • PVC Jacket • 300V, 60°C

BC Conductors • Paper Tape Separator • Serrated Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White								
19140	18	42 x 34	.243	6.17	.018	.46	.036	.91

BC = Bare Copper • PVC = Polyvinyl Chloride

3-Conductor

UL/CSA Types: S, SO, SJ, SJO, SJT



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Type S • Rubber Jacket • 600V, 60°C

BC Conductors • Cotton Serve (18 – 16 AWG) or Paper Tape (14 – 10 AWG) Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green								
19109	18	42 x 34	.380	9.65	.032	.81	.065	1.65
19108	16	65 x 34	.405	10.29	.033	.84	.065	1.65
19107	14	41 x 30	.535	13.59	.048	1.22	.085	2.16
19106	12	65 x 30	.640	16.26	.051	1.30	.099	2.51
19105	10	105 x 30	.681	17.30	.050	1.27	.099	2.51

Type SO • Oil-Resistant Rubber Jacket • 600V, 90°C

BC Conductors • Cotton Serve (18 – 16 AWG) or Paper Tape (14 – 10 AWG) Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green								
19209	18	42 x 34	.380	9.65	.032	.81	.065	1.65
19208	16	65 x 34	.400	10.16	.033	.84	.063	1.60
19207	14	41 x 30	.538	13.67	.048	1.22	.086	2.18
19206	12	65 x 30	.632	16.05	.051	1.30	.100	2.54
19205	10	105 x 30	.681	17.30	.050	1.27	.099	2.51

Type SJ • Rubber Jacket • 300V, 60°C

BC Conductors • Paper Tape Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green								
19129	18	16 x 30	.315	8.00	.031	.79	.039	.99
19125	18	42 x 34	.315	8.00	.032	.81	.038	.97
19130	16	26 x 30	.340	8.64	.031	.79	.038	.97
19124	16	65 x 34	.340	8.64	.033	.84	.038	.97
8479	14	41 x 30	.380	9.65	.031	.79	.039	.99

Type SJO • Oil-Resistant Rubber Jacket • 300V, 90°C

BC Conductors • Smooth Black Jacket • Paper Tape Separator • UL/CSA Listed • Conductor Color Code: Black, White								
19229	18	16 x 30	.315	8.00	.031	.79	.039	.99
19230	16	26 x 30	.340	8.64	.031	.79	.038	.97

Type SJT • PVC Jacket • 300V, 60°C

BC Conductors • Paper Tape Separator • Serrated Black or Gray Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green (18 AWG) or Green/Yellow (16 AWG)								
19348	18	42 x 34	.328	8.33	.032	.81	.046	1.17
19349	16	65 x 34	.340	8.84	.033	.84	.038	.97

Type SJT • PVC Jacket • 300V, 60°C • International Conductor Color Code

BC Conductors • Paper Tape Separator • Smooth Black or Brown Jacket • UL/CSA Listed • Conductor Color Code: Light Brown, Blue, Green/Yellow								
19352	18	42 x 34	.328	8.33	.032	.81	.046	1.17
19353	16	65 x 34	.353	8.97	.033	.84	.036	.91
19354	14	41 x 30	.380	9.65	.033	.84	.038	.97


BC = Bare Copper • PVC = Polyvinyl Chloride



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

3-Conductor

UL/CSA Types: SJT, SJTOW, STOW, SV, SVT



Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

Type SJT • PVC Jacket • Shielded • 300V, 60°C • International Conductor Color Code

BC Conductors • Beldfoil® Shield • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Light Blue, Brown, Green/Yellow								
19362	18	42 x 34	.340	8.64	.032	.81	.050	1.27
19363	16	65 x 34	.365	9.27	.033	.84	.047	1.19
19364	14	41 x 30	.402	10.21	.033	.84	.042	1.07

Type SJT • PVC Jacket • Low Leakage • 300V, 75°C

BC Conductors • Paper Tape Separator • Smooth Brown Jacket • UL Listed • Conductor Color Code: Black, White, Green								
9998	16	65 x 34	.475	12.07	.033	.84	.045	1.14

Type SJTOW • Belflex® Premium PVC Jacket • 300V, 105°C • International Conductor Color Code

BC Conductors • Paper Tape Separator • Smooth Matte Black Jacket • UL/CSA Listed • VW1 • Conductor Color Code: Light Blue, Brown, Green/Yellow								
19509	18	42 x 34	.315	8.00	.032	.81	.038	.97
19510	16	65 x 34	.340	8.64	.033	.84	.038	.97
19511	14	41 x 30	.380	9.65	.032	.81	.040	1.02

Type STOW • Belflex® Premium PVC Jacket • 600V, 105°C • International Conductor Color Code

BC Conductors • Paper Tape Separator • Smooth Black Matte Jacket • UL/CSA Listed • VW1 • Conductor Color Code: Light Blue, Brown, Green/Yellow								
19503	18	42 x 34	.380	9.65	.032	.81	.070	1.78
19504	16	65 x 34	.405	10.29	.033	.84	.070	1.78
19505	14	41 x 30	.558	14.17	.049	1.24	.089	2.26

Type SV • Rubber Jacket • 300V, 60°C

TC Conductors • Cotton Serve Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green								
8453	18	41 x 34	.256	6.50	.018	.46	.036	.91

Type SVT • PVC Jacket • 300V, 60°C

BC Conductors • Paper Tape Separator • Serrated Gray Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green								
19350	18	42 x 34	.253	6.43	.018	.46	.038	.97

Type SVT • PVC Jacket • 300V, 60°C • International Conductor Code

BC Conductors • Paper Tape Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Light Blue, Brown, Green/Yellow								
19402	18	42 x 34	.253	6.43	.018	.46	.034	.86

Type SVT • PVC Jacket • Shielded • 300V, 60°C • International Conductor Color Codes

BC Conductors • Beldfoil® Shielding • 22 AWG (7 x 30) Drain Wire • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Light Blue, Brown, Green/Yellow								
19401	18	42 x 34	.270	6.86	.018	.46	.043	1.09


Type SVT • PVC Jacket • Shielded • 300V, 60°C • International Conductor Color Codes

BC Conductors • Duofoil® Shield (100% Coverage) • Braid (88% Coverage) Smooth Black Jacket • UL/CSA Listed • Conductor Code: Light Blue, Brown, Green/Yellow								
19403	18	42 x 34	.307	7.80	.018	.46	.038	.97

BC = Bare Copper • TC = Tinned Copper • PVC = Polyvinyl Chloride

4-, 5-, and Multi-Conductor

UL/CSA Type SO and UL AWM Styles 4097 and 4256



4-Conductor

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

AWM Style 4097 • Rubber Jacket • 300V, 60°C

TC Conductors • Paper Tape Separator • Smooth Black Jacket • Conductor Color Code: Black, White, Brown, Red								
8454	18	41 X 34	.265	6.73	.018	.46	.036	.91

Type SO • Oil-Resistant Rubber Jacket • 600V, 90°C

BC Conductors • Paper Tape Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Black, White, Green, Red								
19217	14	41 x 30	.603	15.32	.048	1.22	.087	2.21
19216	12	65 x 30	.690	17.53	.051	1.30	.102	2.59

5-Conductor

Part No.	AWG	Stranding	OD (Nom)		Insulation Thickness		Jacket Thickness	
			Inch	mm	Inch	mm	Inch	mm

AWM Style 4256 • Rubber Jacket • 300V, 60°C

TC Conductors • Paper Tape Separator • Smooth Black Jacket • Conductor Color Code: Brown, Green, White, Black, Red								
8455	20 (3)	26 x 34	.280	7.11	.018	.46	.031	.79
	18 (2)	41 x 34						

Multi-Conductor

Part No.	Conductors	AWG	Stranding	OD (Nom)		Insulation Thickness		Jacket Thickness	
				Inch	mm	Inch	mm	Inch	mm

Type SO • 4256 • Oil-Resistant Rubber Jacket • 600V, 60°C

BC Conductors • Paper Tape Separator • Smooth Black Jacket • UL/CSA Listed • Conductor Color Code: Chart 2									
9420	5	16	65 x 34	.506	12.85	.033	.84	.084	2.13
9422	7	16	65 x 34	.581	14.76	.033	.84	.083	2.11
9424	9	16	65 x 34	.720	18.29	.033	.84	.100	2.54
9425	12	16	65 x 34	.720	28.29	.033	.84	.100	2.54
9427	16	16	65 x 34	.787	19.99	.033	.84	.100	2.54
9429	20	16	65 x 34	.862	21.89	.033	.84	.100	2.54

BC = Bare Copper • TC = Tinned Copper

UL Cordage Type

Designation, Construction and Rating

Cord Type*	Description	AWG Size Range	No. of Cond.	Conductor Insulation Material and Min. Average Thickness (inches)	Jacket Material and Min. Average Thickness** (inches)	Temperature Rating (°C)†		Voltage Rating
						Standard	Other	
HPN	Heater Parallel Neoprene	18–12	2 or 3††	.045 Rubber	—	90	105	300
HSJ	Heater Service Junior	18–12	2, 3, 4	.030 Rubber††	.030 Rubber	90	—	300
HSJO	HSJO with Oil-Resistant Jacket	18–12	2, 3, 4	.030 Rubber*	.030 Rubber	90	—	300
S	Service	18–2	2 or more	.030 Rubber*	.060 Rubbers	60	75, 90	600
SE	Service Elastomer	18–2	2 or more	.030 Elastomer	.060 Elastomer	105	—	600
SEO	SE with Oil-Resistant Jacket	18–2	2 or more	.030 Elastomer	.060 Elastomer	105	—	600
SJ	Service Junior	18–10	2, 3, 4, 5	.030 Rubberu	.030 Rubber	60	75, 90	300
SJE	Service Junior Elastomer	18–10	2, 3, 4, 5	.030 Elastomer††	.030 Elastomer	105	—	300
SJEO	SJE with Oil-Resistant Jacket	18–10	2, 3, 4, 5	.030 Elastomer	.030 Elastomer	105	—	300
SJO	SJ with Oil-Resistant Jacket	18–10	2, 3, 4, 5	.030 Rubber*	.030 Rubber	60	75, 90, 105	300
SJT	Service Junior Thermoplastic	18–10	2, 3, 4, 5	.030 Plastic*	.030 Plastic	60	75, 90, 105	300
SJTO	SJT with Oil-Resistant Jacket	18–10	2, 3, 4, 5	.030 Plastic*	.030 Plastic	60	75, 90, 105	300
SO	Service with Oil-Resistant Jacket	18–2	2 or more	.030 Rubber*	.060 Rubber	60	75, 90	600
SP-1	Service Parallel, 1/32" Insulation	18	2 or 3††	.030 Rubber	—	60	—	300
SP-2	Service Parallel, 3/64" Insulation	18–16	2 or 3††	.045 Rubber	—	60	—	300
SP-3	Service Parallel, 1/16" Insulation	18–12	2 or 3††	.060 Rubber*	—	60	—	300
SPT-1	Service Thermoplastic, 1/32" Insulation	18	2 or 3††	.030 Plastic	—	60	75, 90, 105	300
SPT-2	Service Thermoplastic, 3/64" Insulation	18–16	2 or 3††	.045 Plastic	—	60	75, 90, 105	300
SPT-3	Service Thermoplastic, 1/16" Insulation	18–10	2 or 3††	.060 Plastic*	—	60	75, 90, 105	300
ST	Service Thermoplastic	18–2	2 or more	.030 Plastic*	.060 Plastics	60	75, 90, 105	600
STO	ST with Oil-Resistant Jacket	18–2	2 or more	.030 Plastic*	.060 Plastics	60	75, 90, 105	600
SV	Service Vacuum	18	2 or 3††	.015 Rubber	.030 Rubber	60	75, 90	300
SVE	Service Vacuum Elastomer	18–17	2 or 3††	.015 Elastomer	.030 Elastomer	105	—	300
SVEO	SVE with Oil-Resistant Jacket	18–17	2 or 3††	.015 Elastomer	.030 Elastomer	105	—	300
SVO	SVO with Oil-Resistant Jacket	18	2 or 3††	.015 Rubber	.030 Rubber	60	75, 90	300
SVT	Service Vacuum Thermoplastic	18–17	2 or 3††	.015 Plastic	.030 Plastic	60	75, 90, 105	300
SVTO	SVT with Oil-Resistant Jacket	18–17	2 or 3††	.015 Plastic	.030 Plastic	60	75, 90, 105	300
TPT	Tinsel Parallel Thermoplastic	27(Tinsel)	2	.030 Plastic	—	60	—	300
TST	Tinsel Service Thermoplastic	27(Tinsel)	2	.015 Plastic	.030 Rubber	60	—	300

*Types SVO, SVTO, SJO, SJTO, SO, STO and HSJO have jackets which are also recognized for oil resistance at maximum temperature of 60°C. Types SJ, SJO, SJT, SJTO, S, SO, ST and STO may also be made for outdoor use and will be indicated by adding a "W" suffix to the cord type. Similarly, types SJ, SJTO, SJO, SJT, S, SO, ST and STO may also be made in water-resistant grades with "Water-Resistant" printed on the jacket. 3-wire SJT may be made in special low-leakage constructions for medical equipment cords.

**Where no jacket is shown, the construction is integral or flat style with insulation also serving as jacket.

†For cordage ratings higher than 60°C, the temperature limit is printed on the outside of the jacket. This does not apply to heater cordage type HPN, rated 90°C, or 105°C.

††Recognized in three conductors when third or center conductor (with Green or Green/Yellow stripe) is used for equipment grounding.

▲Insulation and jacket thickness depend on cordage size. Thickness as shown are for 18 and 16 AWG.

◆Insulation and jacket thickness depend on cordage size.

No. 12 AWG requires .030" conductor insulation thickness and .045" jacket thickness.

No. 10 AWG requires .045" conductor insulation thickness and .060" jacket thickness.

The term Elastomer refers to thermoplastic elastomer.


Table of Contents

Technical Information	Page No.
Conductor Color Codes	240
Conductors	242
Metric/Imperial/AWG Equivalents	244
Insulations and Jackets	245
Shielding	249
Overview	249
Characteristics of Belden® Shield Types	250
Shield Types Application Guide	251
Cable Standards Reference Guide	252
Cable Substitution Chart	253
Canadian Electrical Code (CEC) Substitution Chart	254
Terms of Use	254
Glossary	255
Index	259

Belden Conductor Color Code Charts

Color Code Chart 1

Cond. No.	Color
1	Black
2	White
3	Red
4	Green
5	Brown
6	Blue
7	Orange
8	Yellow
9	Purple
10	Gray
11	Pink
12	Tan

Color Code Chart 2 and 2R: 2 = Spiral Stripe, 2R = Ring Band Stripe

Cond. No.	Color
1	Black
2	White
3	Red
4	Green
5	Orange
6	Blue
7	White/Black Stripe
8	Red/Black Stripe
9	Green/Black Stripe
10	Orange/Black Stripe
11	Blue/Black Stripe
12	Black/White Stripe
13	Red/White Stripe

Cond. No.	Color
14	Green/White Stripe
15	Blue/White Stripe
16	Black/Red Stripe
17	White/Red Stripe
18	Orange/Red Stripe
19	Blue/Red Stripe
20	Red/Green Stripe
21	Orange/Green Stripe
22	Black/White/Red
23	White/Black/Red
24	Red/Black/White
25	Green/Black/White
26	Orange/Black/White

Cond. No.	Color
27	Blue/Black/White
28	Black/Red/Green
29	White/Red/Green
30	Red/Black/Green
31	Green/Black/Orange
32	Orange/Black/Green
33	Blue/White/Orange
34	Black/White/Orange
35	White/Red/Orange
36	Orange/White/Blue
37	White/Red/Blue
38	Black/White/Green
39	White/Black/Green

Cond. No.	Color
40	Red/White/Green
41	Green/White/Blue
42	Orange/Red/Green
43	Blue/Red/Green
44	Black/White/Blue
45	White/Black/Blue
46	Red/White/Blue
47	Green/Orange/Red
48	Orange/Red/Blue
49	Blue/Orange/Red
50	Black/Orange/Red

Color Code Chart 3: Belden Standard for Paired Cable

Pair	Color
1	Black & Red
2	Black & White
3	Black & Green
4	Black & Blue
5	Black & Yellow
6	Black & Brown
7	Black & Orange
8	Red & White
9	Red & Green
10	Red & Blue

Pair	Color
11	Red & Yellow
12	Red & Brown
13	Red & Orange
14	Green & White
15	Green & Blue
16	Green & Yellow
17	Green & Brown
18	Green & Orange
19	White & Blue
20	White & Yellow

Pair	Color
21	White & Brown
22	White & Orange
23	Blue & Yellow
24	Blue & Brown
25	Blue & Orange
26	Brown & Yellow
27	Brown & Orange
28	Orange & Yellow
29	Purple & Orange
30	Purple & Red

Pair	Color
31	Purple & White
32	Purple & Green
33	Purple & Blue
34	Purple & Yellow
35	Purple & Brown
36	Purple & Black
37	Gray & White

Color Code Chart 4: Belden Standard for Paired Cable

Pair	Color
1	White & Blue
2	White & Orange
3	White & Green
4	White & Brown
5	White & Gray
6	Red & Blue
7	Red & Orange

Pair	Color
8	Red & Green
9	Red & Brown
10	Red & Gray
11	Black & Blue
12	Black & Orange
13	Black & Green
14	Black & Brown

Pair	Color
15	Black & Gray
16	Yellow & Blue
17	Yellow & Orange
18	Yellow & Green
19	Yellow & Brown
20	Yellow & Gray
21	Purple & Blue

Pair	Color
22	Purple & Orange
23	Purple & Green
24	Purple & Brown
25	Purple & Gray

Color Code Chart 5: Western Electric Standard for Paired Cable

Pair	Color
1	White/Blue Stripe & Blue/White Stripe
2	White/Orange Stripe & Orange/White Stripe
3	White/Green Stripe & Green/White Stripe
4	White/Brown Stripe & Brown/White Stripe
5	White/Gray Stripe & Gray/White Stripe
6	Red/Blue Stripe & Blue/Red Stripe
7	Red/Orange Stripe & Orange/Red Stripe

Pair	Color
8	Red/Green Stripe & Green/Red Stripe
9	Red/Brown Stripe & Brown/Red Stripe
10	Red/Gray Stripe & Gray/Red Stripe
11	Black/Blue Stripe & Blue/Black Stripe
12	Black/Orange Stripe & Orange/Black Stripe
13	Black/Green Stripe & Green/Black Stripe
14	Black/Brown Stripe & Brown/Black Stripe

Pair	Color
15	Black/Gray Stripe & Gray/Black Stripe
16	Yellow/Blue Stripe & Blue/Yellow Stripe
17	Yellow/Orange Stripe & Orange/Yellow Stripe
18	Yellow/Green Stripe & Green/Yellow Stripe
19	Yellow/Brown Stripe & Brown/Yellow Stripe
20	Yellow/Gray Stripe & Gray/Yellow Stripe
21	Purple/Blue Stripe & Blue/Purple Stripe

Pair	Color
22	Purple/Orange Stripe & Orange/Purple Stripe
23	Purple/Green Stripe & Green/Purple Stripe
24	Purple/Brown Stripe & Brown/Purple Stripe
25	Purple/Gray Stripe & Gray/Purple Stripe



Belden Color Code Charts

Color Code Chart E1
ICEA S-73-532

Cond. No.	Base Color	Tracer	Tracer
1	Black	—	—
2	White	—	—
3	Red	—	—
4	Green	—	—
5	Orange	—	—
6	Blue	—	—
7	White	Black	—
8	Red	Black	—
9	Green	Black	—
10	Orange	Black	—
11	Blue	Black	—
12	Black	White	—
13	Red	White	—

Cond. No.	Base Color	Tracer	Tracer
14	Green	White	—
15	Blue	White	—
16	Black	Red	—
17	White	Red	—
18	Orange	Red	—
19	Blue	Red	—
20	Red	Green	—
21	Orange	Green	—
22	Black	White	Red
23	White	Black	Red
24	Red	Black	White
25	Green	Black	White
26	Orange	Black	White

Cond. No.	Base Color	Tracer	Tracer
27	Blue	Black	White
28	Black	Red	Green
29	White	Red	Green
30	Red	Black	Green
31	Green	Black	Orange
32	Orange	Black	Green
33	Blue	White	Orange
34	Black	White	Orange
35	White	Red	Orange
36	Orange	White	Blue
37	White	Red	Blue
38	Black	White	Green
39	White	Black	Green

Cond. No.	Base Color	Tracer	Tracer
40	Red	White	Green
41	Green	White	Blue
42	Orange	Red	Green
43	Blue	Red	Green
44	Black	White	Blue
45	White	Black	Blue
46	Red	White	Blue
47	Green	Orange	Red
48	Orange	Red	Blue
49	Blue	Red	Orange
50	Black	Orange	Red

Pair cables are Black, White, and Numbered.
Triad cables are Black, White, Red, and Numbered.

Color Code Chart
E2 ICEA S-73-532

Cond. No.	Base Color	Tracer
1	Black	—
2	Red	—
3	Blue	—
4	Orange	—
5	Yellow	—
6	Brown	—
7	Red	Black
8	Blue	Black
9	Orange	Black
10	Yellow	Black

Cond. No.	Base Color	Tracer
11	Brown	Black
12	Black	Red
13	Blue	Red
14	Orange	Red
15	Yellow	Red
16	Brown	Red
17	Black	Blue
18	Red	Blue
19	Orange	Blue
20	Yellow	Blue

Cond. No.	Base Color	Tracer
21	Brown	Blue
22	Black	Orange
23	Red	Orange
24	Blue	Orange
25	Yellow	Orange
26	Brown	Orange
27	Black	Yellow
28	Red	Yellow
29	Blue	Yellow
30	Orange	Yellow

Cond. No.	Base Color	Tracer
31	Brown	Yellow
32	Black	Brown
33	Red	Brown
34	Blue	Brown
35	Orange	Brown
36	Yellow	Brown

Pair cables are Black, Red, and Numbered.
Triad cables are Black, Red, Blue and Numbered.
Colors repeat after 36 conductors.
There are no Green or White conductors or stripes.

Color Code Chart M4
ICEA Method 4: All Conductors Black and Numbered ICEA S-73-532

Cond. No.	Conductor Printing
1	"1-ONE-1"
2	"2-TWO-2"
3	"3-THREE-3"
4	"4-FOUR-4"
5	"5-FIVE-5"
6	"6-SIX-6"
7	"7-SEVEN-7"
8	"8-EIGHT-8"
9	"9-NINE-9"
10	"10-TEN-10"
11	"11-ELEVEN-11"
12	"12-TWELVE-12"
13	"13-THIRTEEN-13"

Cond. No.	Conductor Printing
14	"14-FOURTEEN-14"
15	"15-FIFTEEN-15"
16	"16-SIXTEEN-16"
17	"17-SEVENTEEN-17"
18	"18-EIGHTEEN-18"
19	"19-NINETEEN-19"
20	"20-TWENTY-20"
21	"21-TWENTY-ONE-21"
22	"22-TWENTY-TWO-22"
23	"23-TWENTY-THREE-23"
24	"24-TWENTY-FOUR-24"
25	"25-TWENTY-FIVE-25"
26	"26-TWENTY-SIX-26"

Cond. No.	Conductor Printing
27	"27-TWENTY-SEVEN-27"
28	"28-TWENTY-EIGHT-28"
29	"29-TWENTY-NINE-29"
30	"30-THIRTY-30"
31	"31-THIRTY-ONE-31"
32	"32-THIRTY-TWO-32"
33	"33-THIRTY-THREE-33"
34	"34-THIRTY-FOUR-34"
35	"35-THIRTY-FIVE-35"
36	"36-THIRTY-SIX-36"
37	"37-THIRTY-SEVEN-37"
38	"38-THIRTY-EIGHT-38"
39	"39-THIRTY-NINE-39"

Cond. No.	Conductor Printing
40	"40-FORTY-40"
41	"41-FORTY-ONE-41"
42	"42-FORTY-TWO-42"
43	"43-FORTY-THREE-43"
44	"44-FORTY-FOUR-44"
45	"45-FORTY-FIVE-45"
46	"46-FORTY-SIX-46"
47	"47-FORTY-SEVEN-47"
48	"48-FORTY-EIGHT-48"
49	"49-FORTY-NINE-49"
50	"50-FIFTY-50"

Conductors

Solid Copper Wire, American Wire Gage

Gage (AWG)	Nominal OD		Nominal Circular MIL Area	Nominal Weight (Lbs. per 1000')	Nominal Resistance @ 68°F (Ω/1000')
	Inches	mm			
10	.1019	2.60	10,380.0	31.43	.9989
11	.0907	2.30	8234.0	24.92	1.260
12	.0808	2.05	6530.0	19.77	1.588
13	.0720	1.83	5178.0	15.68	2.003
14	.0641	1.63	4107.0	12.43	2.525
15	.0571	1.45	3260.0	9.858	3.184
16	.0508	1.29	2583.0	7.818	4.016
17	.0453	1.15	2050.0	6.200	5.064
18	.0403	1.02	1620.0	4.917	6.385
19	.0359	.912	1200.0	3.899	8.051
20	.0320	.813	1020.0	3.092	10.15
21	.0285	.724	812.1	2.452	12.80
22	.0253	.643	640.4	1.945	16.14
23	.0226	.574	511.5	1.542	20.36
24	.0201	.511	404.0	1.223	25.67
25	.0179	.455	320.4	.9699	32.37
26	.0159	.404	253.0	.7692	40.81
27	.0142	.361	201.5	.6100	51.47
28	.0126	.320	159.8	.4837	64.90
29	.0113	.287	126.7	.3836	81.83
30	.0100	.254	100.5	.3042	103.2
31	.0089	.226	79.7	.2413	130.1
32	.0080	.203	63.21	.1913	164.1
33	.0071	.180	50.13	.1517	206.9
34	.0063	.160	39.75	.1203	260.9
35	.0056	.142	31.52	.09542	331.0
36	.0050	.127	25.00	.07568	414.8
37	.0045	.114	19.83	.0613	512.1
38	.0040	.102	15.72	.04759	648.6
39	.0035	.089	12.20	.03774	847.8
40	.0031	.079	9.61	.02993	1080.0

Information from National Bureau of Standards Copper Wire Tables—Handbook 100.

Unparalleled Performance

Belden is one of only a very few cable manufacturers to draw and anneal its own conductors. This is a time-consuming process, but it allows us to ensure signal integrity, as well as proper physical characteristics.

In addition, the standards under which we design and manufacture our fiber optic cabling are among the strictest in the industry. The result is a comprehensive offering of products which give unparalleled performance and can satisfy your most demanding operating and environmental challenges.

Conductors

Stranded Copper Wire, American Wire Gage

Gage (AWG)	Stranding (Nom. AWG)	Min. Average OD of Strand	Approximate OD		ASTM Min. Circular MIL Area	Min. Weight (Lbs./1000')	Max. Resistance* @ 68°F (Ω/1000')
			Inch	mm			
36	7 x 44	.0019	.006	.152	25	.076	414.8
34	7 x 42	.0024	.0075	.191	39.7	.121	260.9
32	7 x 40	.0030	.0093	.236	64	.195	164.1
32	19 x 44	.0018	.010	.254	64	.195	164.1
30♦	7 x 38	.0038	.012	.305	100	.304	112.0
30	19 x 42	.0023	.012	.305	100	.304	112.0
28♦	7 x 36	.0048	.015	.381	159	.484	70.7
28♦	19 x 40	.0029	.016	.406	159	.484	70.7
27	7 x 35	.0054	.017	.432	202	.614	55.6
26♦	7 x 34	.0060	.019	.483	253	.770	44.4
26	10 x 36	.0050	.021	.533	253	.770	44.4
26♦	19 x 38	.0036	.020	.508	253	.770	44.4
24♦	7 x 32	.0076	.024	.610	404	1.229	27.7
24	10 x 34	.0064	.024	.610	404	1.229	27.7
24♦	19 x 36	.0046	.024	.610	404	1.229	27.7
24♦	42 x 40	.0031	.023	.584	404	1.229	27.7
22♦	7 x 30	.0096	.030	.762	640	1.947	17.5
22♦	19 x 34	.0058	.031	.787	640	1.947	17.5
22	26 x 36	.0050	.030	.762	640	1.947	17.5
20♦	7 x 28	.0126	.038	.965	1020	3.103	10.9
20	10 x 30	.0101	.037	.940	1020	3.103	10.9
20♦	19 x 32	.0073	.037	.940	1020	3.103	10.9
20	26 x 34	.0063	.036	.914	1020	3.103	10.9
20♦	42 x 36	.0049	.038	.965	1020	3.103	10.9
18♦	7 x 26	.0152	.048	1.22	1620	4.93	6.92
18	16 x 30	.0101	.047	1.19	1620	4.93	6.92
18♦	19 x 30	.0092	.049	1.24	1620	4.93	6.92
18♦	42 x 34	.0062	.047	1.19	1620	4.93	6.92
18♦	65 x 36	.0050	.047	1.19	1620	4.93	6.92
16♦	7 x 24	.0192	.060	1.52	2580	7.85	4.35
16♦	19 x 29	.0117	.058	1.47	2580	7.85	4.35
16	26 x 30	.0100	.059	1.50	2580	7.85	4.35
16♦	65 x 34	.0063	.059	1.50	2580	7.85	4.35
16	105 x 36	.0050	.059	1.50	2580	7.85	4.35
14♦	7 x 22	.0242	.076	1.93	4110	12.50	2.73
14♦	19 x 26	.0147	.071	1.80	4110	12.50	2.73
14♦	42 x 30	.0099	.075	1.91	4110	12.50	2.73
14	105 x 34	.0063	.075	1.91	4110	12.50	2.73
12♦	7 x 20	.0305	.096	2.44	6530	19.86	1.71
12♦	19 x 25	.0185	.093	2.36	6530	19.86	1.71
12♦	65 x 30	.0100	.095	2.41	6530	19.86	1.71
12	165 x 34	.0063	.095	2.41	6530	19.86	1.71
10	37 x 26	.0167	.115	2.92	10380	31.58	1.08
10	65 x 28	.0126	.120	3.05	10380	31.58	1.08
10	105 x 30	.0099	.118	3.00	10380	31.58	1.08

*AWG 10 through 30 per UL Subject 13.

Belden has standardized on the stranded conductors used in the design of all Belden® products. These preferred constructions, based on standard industry practices, are marked with a ♦ symbol.

Conductors

Metric / Imperial / AWG Equivalents
(Square Millimeters / Square Inches / Circular Mills / AWG)

Sq. mm	Sq. In.	Cir. Mills	AWG
1000	1.550	1974000	
975	1.511	1924700	
950	1.472	1875300	
925	1.434	1826000	
900	1.395	1776600	
875	1.356	1727300	
850	1.317	1677900	
825	1.279	1628600	
800	1.240	1579200	
775	1.201	1529900	
750	1.163	1480500	
725	1.124	1431200	
700	1.085	1381800	
675	1.046	1332500	
650	1.008	1283100	
625	.969	1233800	
600	.930	1184400	
575	.891	1135100	
550	.853	1085700	
525	.814	1036400	
500	.775	987000	
475	.736	937700	
450	.698	888300	
425	.659	839000	
400	.620	789600	
375	.581	740300	
350	.542	690900	
325	.504	641600	
300	.465	592200	
275	.426	542900	
250	.388	493500	
225	.349	444200	
200	.310	394800	
175	.271	345500	
150	.233	296100	
125	.1938	246800	
—	—	211600	4/0
100	.1550	197400	
95	.1472	187530	
90	.1395	177660	
—	—	167800	3/0
85	.1317	167790	
80	.1240	157920	

Sq. mm	Sq. In.	Cir. Mills	AWG
75	.1163	148050	
70	.1085	138180	
—	—	133100	2/0
65	.1008	128310	
60	.0930	118440	
55	.0853	108570	
—	—	105600	1/0
50	.0775	98700	
45	.0698	88830	
—	—	83690	1
40	.0620	78960	
35	.0542	69090	
—	—	66360	2
30	.0465	59220	
—	—	56220	3
25	.0388	49350	
—	—	41740	4
20.0	.0310	39480	
19.5	.0302	38490	
19.0	.0294	37510	
18.5	.0287	36520	
18.0	.0279	35530	
17.5	.0271	34550	
17.0	.0264	33560	
—	—	33090	5
16.5	.0256	32560	
16.0	.0248	31580	
15.5	.0240	30600	
15.0	.0233	29610	
14.5	.0225	28620	
14.0	.0217	27640	
13.5	.0209	26650	
—	—	26420	6
13.0	.0201	25660	
12.5	.0194	24680	
12.0	.0186	23690	
11.5	.0178	22700	
11.0	.0171	21710	
—	—	20820	7
10.5	.0163	20730	
10.0	.0155	19740	
9.5	.01472	18753	
9.0	.01395	17766	

Sq. mm	Sq. In.	Cir. Mills	AWG
8.5	.01317	16779	
—	—	16510	8
8.0	.01240	15792	
7.5	.01163	14805	
7.0	.01085	13818	
—	—	13090	9
6.5	.01008	12831	
6.0	.00930	11844	
5.5	.00853	10857	
—	—	10380	10
5.00	.00775	9870	
4.75	.00736	9377	
4.50	.00698	8883	
4.25	.00659	8390	
—	—	8230	11
4.00	.00620	7896	
3.75	.00581	7403	
3.50	.00542	6909	
—	—	6530	12
3.25	.00504	6416	
3.00	.00465	5922	
2.75	.00426	5429	
—	—	5180	13
2.50	.00388	4935	
2.25	.00349	4422	
—	—	4110	14
2.00	.00310	3948	
1.75	.00271	3455	
—	—	3260	15
1.50	.00233	2961	
—	—	2580	16
1.25	.00194	2468	
—	—	2050	17
1.00	.00155	1974	
.90	.00140	1777	
—	—	1620	18
.80	.00124	1579	
.75	.00116	1481	
.70	.00109	1382	
—	—	1290	19
.60	.00093	1184	
—	—	1029	20
.50	.000775	987	

To Convert	Multiply By
Inches to millimeters	25.4
Millimeters to inches	.03937

Insulations and Jackets

Overview

Insulations

Because we formulate our own insulations, they provide superior performance under a variety of hostile environmental conditions. Belden cables are available in UL Listed and CSA Approved insulation compounds.

Among the insulations we offer:

- Polyethylene
- Polyvinyl chloride (PVC)
- Polypropylene

Also available are:

- **Datalene®**—For computer and data transmission, Datalene is crush resistant, lightweight, and offers good performance characteristics over a wide range of temperatures.
- **FEP Insulated Plenum & High-Temperature Cables**—For data communications, instrumentation/control, and other commercial and industrial applications. Plenum cables eliminate the need for conduit and reduce installation time.

Jackets

Belden electronic cables are manufactured in a wide selection of jacketing materials.

- **Flamarrest®**—A Belden jacketing innovation, Flamarrest is a low-smoke, flame retardant compound that is five times more flexible than fluorocopolymer. Cables jacketed with Flamarrest are cost efficient and easy to install.

Also included in our wide selection of jacketing compounds are:

- Polyvinyl chloride
- Polyethylene
- Polyurethane
- FEP
- ETFE
- E-CTFE
- Neoprene
- EPDM
- CSPE
- Silicone rubber
- Natural rubber

Special compounds and variations of standard compounds are used as well.

Typical Characteristics of Popular Insulation and Jacketing Compounds

EPDM

EPDM (ethylene-propylene-diene elastomer) is a chemically cross-linked elastomer with excellent flexibility at high and low temperatures (150° to -55°C). It has good insulation resistance and dielectric strength, as well as excellent abrasion resistance and mechanical properties. EPDM also has better cut-through resistance than Silicone rubber, which it replaces in some applications.

EPDM is compatible with most varnishes, but after the dip and bake cycle varnish tends to adhere to the insulation (because EPDM, unlike some rubber insulations, does not exude oils or waxes). As lead wires are pulled apart for termination, the varnish cracks, sometimes breaking the insulation.

To resolve this problem, a stearic solution is applied to the lead wire during the put-up process. This ensures that rigid varnish does not cause EPDM insulation to rupture when the wire is terminated.

Field evaluations by numerous users reveal that the coated EPDM has excellent varnish resistance at least equal to synthetic elastomers, cross-link polyethylene, or silicone glass braid in dip and bake systems.

Flamarrest®

Flamarrest is a plenum grade chloride-based jacketing material with low smoke and low flame spread properties. Cables jacketed with Flamarrest meet the ANSI/NFPA Standard 262-1985 (U L910), Plenum Cable Flame Test.

Insulations and Jackets

Overview

E-CTFE

Thermoplastic fluoropolymer material with excellent chemical resistance, electrical properties, thermal characteristics, and impact resistance. The temperature rating is -70°C to 150°C.

Neoprene

The temperature range of this material can vary from -55°C to 90°C. The actual range would depend on the formulation used. Neoprene is both oil-resistant and sunlight-resistant, making it ideal for many outdoor applications. The most stable colors are black, dark brown, and gray. The electrical properties are not as good as other insulation materials. Because of this, thicker insulation should be used. Typical designs where this material is used are lead wire insulation and cable jackets.

Polyethylene (Solid and Foamed)

A very good insulation in terms of electrical properties. Low dielectric constant, a stable dielectric constant over all frequencies, very high insulation resistance. In terms of flexibility, polyethylene can be rated stiff to very hard, depending on molecular weight and density—low density being the most flexible, with high-density, high-molecular weight formulation being very hard. Moisture resistance is rated excellent. Black and specially formulated colored versions have excellent weather resistance. The dielectric constant is 2.3 for solid insulation and typically 1.64 for foam designs.

Flame retardant formulations are available with dielectric constants ranging from about 1.7 for foam flame retardant to 2.58 for solid flame retardant polyethylene.

Polypropylene (Solid and Foam)

Similar in electrical properties to polyethylene. This material is primarily used as an insulation material. Typically, it is harder than polyethylene. This makes it suitable for thin wall insulations. UL maximum temperature rating may be 60°C, 80°C or 105°C. The dielectric constant is 2.25 for solid and typically 1.55 for foam designs.

Polyurethane

This material is used primarily as a cable jacket material. It has excellent oxidation, oil, and ozone resistance. Some formations also have good flame resistance. It is a hard material with excellent abrasion resistance. It has outstanding "memory" properties, making it an ideal jacket material for retractile cords.

PVC

Sometimes referred to as vinyl or polyvinylchloride. Extremely high or low temperature properties cannot be found in one formulation. Certain formulations may have -55°C to 105°C rating. Other common vinyls may have -20°C to 60°C. There are many formulations for the variety of different applications. The many varieties of PVC also differ in pliability and electrical properties. The price range can vary accordingly. Typical dielectric constant values can vary from 3.5 to 6.5.

Rubber

The description of rubber normally includes natural rubber and SBR compounds. Both of these materials can be used for insulations and jackets. There are many formulations of these basic materials. Each formulation is for

a specific application. Some formulations are suitable for -55°C minimum, while others are suitable for 75°C maximum.

Silicone

This is a very soft insulation which has a temperature range from -80°C to 200°C. It has excellent electrical properties plus ozone resistance, low moisture absorption, weather resistance, and radiation resistance. It typically has low mechanical strength and poor scuff resistance.

FEP/TFE

This material has excellent electrical properties, temperature range, and chemical resistance. It is not suitable where subjected to nuclear radiation and does not have good high voltage characteristics. FEP is extrudable in a manner similar to PVC and polyethylene. This means that long wire and cable lengths are available. TFE is extrudable in a hydraulic ram type process. Lengths are limited due to amount of material in the ram, thickness of the insulation, and preform size. TFE must be extruded over a silver- or nickel-coated wire. The nickel- and silver-coated designs are rated 260°C and 200°C maximum, respectively. The cost of FEP/TFE is approximately 8 to 10 times more per pound than PVC compounds.

ETFE

Fluorocopolymer thermoplastic material having excellent electrical properties, heat resistance, chemical resistance, toughness, radiation resistance, and flame resistance. The temperature rating is -65°C to 150°C.

Insulations and Jackets

Comparative Properties of Plastic Insulating and Jacketing Compounds

Properties	PVC	LDPE	Cellular Polyethylene	HDPE	Polypropylene	Cellular Polypropylene	PUR	Nylon	CPE	Flamarrest®
Oxidation Resistance	E	E	E	E	E	E	E	E	E	E
Heat Resistance	G-E	G	G	E	E	E	G	E	E	G-E
Oil Resistance	F	G-E	G	G-E	F	F	E	E	E	F
Low-Temperature Flexibility	P-G	E	E	E	P	P	G	G	E	P-G
Weather, Sun Resistance	G-E	E	E	E	E	E	G	E	E	G
Ozone Resistance	E	E	E	E	E	E	E	E	E	E
Abrasion Resistance	F-G	G	F	E	F-G	F-G	O	E	E-O	F-G
Electrical Properties	F-G	E	E	E	E	E	P	P	E	G
Flame Resistance	E	P	P	P	P	P	P	P	E	E
Nuclear Radiation Resistance	F	G-E	G	G-E	F	F	G	F-G	O	F
Water Resistance	F-G	E	E	E	E	E	P-G	P-F	O	F
Acid Resistance	G-E	G-E	G-E	E	E	E	F	P-F	E	G
Alkali Resistance	G-E	G-E	G-E	E	E	E	F	E	E	G
Aliphatic Hydrocarbons Resistance (Gasoline, Kerosene, etc.)	P	G-E	G	G-E	P-F	P	P-G	G	E	P
Aromatic Hydrocarbons Resistance (Benzol, Toluol, etc.)	P-F	P	P	P	P-F	P	P-G	G	G-E	P-F
Halogenated Hydrocarbons Resistance (Degreaser Solvents)	P-F	G	G	G	P	P	P-G	G	E	P-F
Alcohol Resistance	P-F	E	E	E	E	E	P-G	P	E	G
Underground Burial	P-G	G	N/A	E	N/A	N/A	G	P	E-O	P

These ratings are based on average performance of general purpose compounds. Any given property can usually be improved by the use of selective compounding.

Comparative Properties of Fluoropolymer and Rubber Insulating and Jacketing Compounds

Properties	Fluoropolymers					Rubber				
	FEP	ETFE	PTFE	PVDF/PVF	E-CTFE	Rubber	Neoprene	CSPE	EPDM	Silicone
Oxidation Resistance	O	E	O	O	O	F	G	E	E	E
Heat Resistance	O	E	O	O	O	F	G	E	E	O
Oil Resistance	O	E	E-O	E	O	P	G	G	P	F-G
Low-Temperature Flexibility	O	E	O	F	O	G	F-G	F	G-E	O
Weather, Sun Resistance	O	E	O	E-O	O	F	G	E	E	O
Ozone Resistance	E	E	O	E	E	P	G	E	E	O
Abrasion Resistance	E	E	O	E	E	E	G-E	G	G	P
Electrical Properties	E	E	E	G-E	E	G	P	G	E	G
Flame Resistance	O	G	E	E	E-O	P	G	G	P	F-G
Nuclear Radiation Resistance	P-G	E	P	E	E	F	F-G	E	G	E
Water Resistance	E	E	E	E	E	G	E	E	G-E	G-E
Acid Resistance	E	E	E	G-E	E	F-G	G	E	G-E	F-G
Alkali Resistance	E	E	E	E	E	F-G	G	E	G-E	F-G
Aliphatic Hydrocarbons Resistance (Gasoline, Kerosene, etc.)	E	E	E	E	E	P	G	F	P	P-F
Aromatic Hydrocarbons Resistance (Benzol, Toluol, etc.)	E	E	E	G-E	E	P	P-F	F	F	P
Halogenated Hydrocarbons Resistance (Degreaser Solvents)	E	E	E	G	E	P	P	P-F	P	P-G
Alcohol Resistance	E	E	E	E	E	G	F	G	P	G
Underground Burial	E	E	E	E	E	N/A	N/A	N/A	N/A	N/A

These ratings are based on average performance of general purpose compounds. Any given property can usually be improved by the use of selective compounding.

CPE = Chlorinated Polyethylene • HDPE = High-density Polyethylene • LDPE = Low-density Polyethylene • PUR = Polyurethane



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Insulations and Jackets

Nominal Temperature Range for Various Insulating and Jacketing Compounds

Compound	Normal Low	Normal High	Special Low	Special High
CSPE	-20°C	90°C	-40°C	105°C
EPDM	-55°C	105°C	—	150°C
Neoprene	-20°C	60°C	-55°C	90°C
Polyethylene (Solid and Foamed)	-60°C	80°C	—	—
Polypropylene (Solid and Foamed)	-40°C	105°C	—	—
Rubber	-30°C	60°C	-55°C	75°C
FEP	-70°C	200°C	—	—
PVC	-20°C	80°C	-55°C	105°C
Silicone	-80°C	150°C	—	200°C
E-CTFE	-70°C	150°C	—	—
ETFE	-65°C	150°C	—	—
PTFE	-70°C	260°C	—	—
CPE	-35°C	90°C	-45°C	105°C
PVDF/PVF	-20°C	150°/125°C	-40°C	150°/150°C
Flamarrest®	-20°C	75°C	—	—

Shielding

Overview

Innovative Leadership

The evolution of technology maintains steady demand for sophisticated cable shielding. Belden meets that demand with innovative shielding and shield effectiveness testing methods to supply you with high quality, dependable cable.

With the creation of trademarked shield designs and patented test methods, Belden has earned a reputation for innovation and leadership that is unequaled in the wire and cable industry. In addition, Belden offers the broadest line of shielded multi-conductor, coaxial and flat cable in the industry.

Several unique Belden innovations are utilized across a wide range of shielding applications:

- **Beldfoil®** – The first aluminum/polyester foil developed for use as a cable shield. Provides 100% shield coverage for optimum protection.
- **Duofoil®** – Consists of an aluminum-poly-aluminum laminate wrapped around the cable's dielectric core. Provides 100% physical coverage, and improves shield reliability and flex life.

Belden also uses a number of innovative techniques to apply shielding to multi-conductor and paired cables:

- **"French Braid" Shields** – Belden's patented "French Braid" shield is a double spiral (double serve shield) with the two spirals tied together by one weave.



Belden's patented "French Braid" shield.

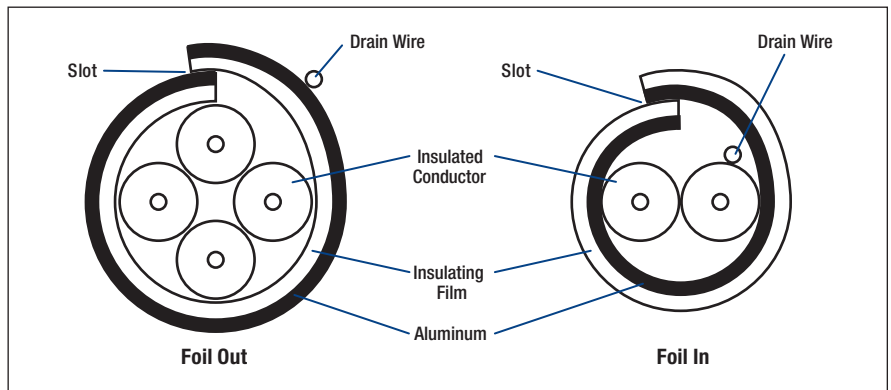


Figure 1: Foil shield configurations without shorting folds.

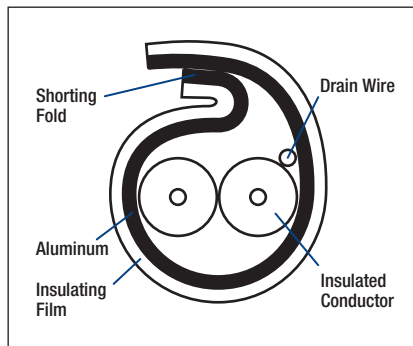


Figure 2: Foil shield configuration with shorting fold.

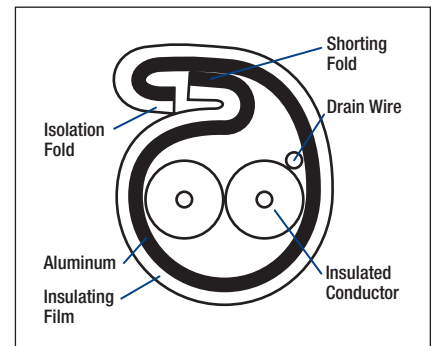


Figure 3: Foil shield with Z-Fold reduces crosstalk in multi-pair applications.

- **Shorting Fold** – Belden uses a shorting fold technique to maintain metal-to-metal contact for improved high frequency performance. Without the shorting fold, a slot is created through which signals can leak and cause interference. (See Figures 1 and 2.)

- **Z-Fold®** – Belden improves on the traditional shorting fold by employing a Z-Fold designed for use in multi-pair applications to reduce crosstalk. The Z-Fold (see Figure 3) combines an isolation and a shorting fold. The shorting fold provides metal-to-metal contact while the isolation fold keeps shields from shorting to one another in multi-pair, individually shielded cables.

The use of either a shorting fold or a Z-Fold increases the foil shield's range of effectiveness to higher frequencies.

Shielding

Characteristics of Belden® Shield Types

Foil Shields

Foil shields consist of aluminum foil laminated to a polyester or polypropylene film. The film gives the shield mechanical strength and bonus insulation. Foil shields provide 100% cable coverage, necessary for electrostatic shield protection. Because of their small size, foil shields are commonly used to shield individual pairs of multi-pair data cables to reduce crosstalk. They have less weight, bulk and cost less than spiral or braid shields and are generally more effective than braid shields in RF ranges.


Foil shields are more flexible than braid but have a shorter flex life than spiral or braid.



Drain wires are used with foil shields to make termination easier and to ground electrostatic discharges. The shortcomings in using the foil shield include higher DC resistance and lower mechanical strength than braid or spiral shields.

Braid Shields

A braid shield consists of groups of tinned or bare copper or aluminum strands, one set woven in a clockwise direction and interwoven with another set in a counterclockwise direction.



Braid shields provide superior structural integrity, while maintaining good flexibility and flex life. These shields are ideal for minimizing low frequency interference and have lower DC resistance than foil. Braid shields are effective at audio, as well as RF ranges.

Generally, the higher the braid coverage, the more effective the shield. However, the trade-off between cost and braid coverage must be considered. Typical braid coverages are between 80% and 95%. Coverage of 100% is unattainable with a braid shield. Other features to consider when choosing a braid shield are the weave angle, strand diameter, number of carriers (strand groups) and the number of ends (strands).

Braid shields are generally bulkier and heavier than other shields and, in some cases, harder to terminate because the braid may be combed out and pigtailed.

Spiral/Serve Shields

A spiral/serve shield consists of wire (usually copper) wrapped in a spiral around the inner cable core.

Superior flexibility and flex life, ease of termination and up to 97% coverage are the advantages of spiral shields. They are best suited for audio applications. As a rule, spiral shields are not effective above the audio frequency range due to the coil effect produced by the inductance of served wire strands.



“French Braid” Shields

Belden’s patented “French Braid” shield is a double spiral (double serve shield) with the two spirals tied together by one weave. This construction provides improved flex life over standard spiral shields, improved flexibility over conventional braid shields, and lower levels of microphonic or triboelectric noise than either spiral or conventional braid shields.




Combination Shields

Combination shields consist of more than one layer of shielding. They provide maximum shield efficiency across the frequency spectrum. The combination foil/braid shield combines the advantages of 100% foil coverage, plus the strength and low DC resistance of the braid.

Belden has also developed a number of shielding configurations for use with broadband coaxial cables.

- **Duobond®** – Duobond is essentially the same construction as Duofoil® (a laminated tape of foil/film/foil), but with an extra layer of adhesive bonding the foil shield to the dielectric core. This foil shield provides 100% coverage and insures maximum shield protection.

- **Duobond II (Foil/Braid)** – Combines Duobond with an outer braid, applied for greater protection against interference and to increase the overall tensile strength.



- **Duobond III (Tri-Shield)** – Uses the Duobond II design (foil/braid) plus a surrounding layer of Duofoil. The extra foil layer improves shield reliability and provides an additional interference barrier.



- **Duobond Plus®** – Features foil/braid/foil construction with a shorting fold in the outermost foil. This fold prevents a slot opening from being created in the shield, thereby preventing signal egress or ingress.



- **Duobond IV (Quad Shield)** – Offers an extra layer of braid shield (foil/braid/foil/braid) for improved strength and durability.



Other combination shields are available such as the foil/braid/foil/braid used on the Ethernet cables, braid/braid or foil/spiral.

Shielding

Shield Types Application Guide, Relative Cost Comparison of Shield Types Shield Performance Ratings

Shield Types Application Guide

Choose a Foil Shield...

- For protection against capacitive (electric field) coupling where shield coverage is more important than low DC resistance.
- When possible sources of interference include TV signals, crosstalk from other circuits, radio transmitters, fluorescent lights or computing equipment.
- For MATV, CATV, video, networking, computer I/O cables in office, industrial or commercial environments where ambient EMI levels are low.

Choose a Braid Shield...

- For superior performance against diffusion coupling, where low DC resistance is important, and to a lesser extent, capacitive and inductive coupling.
- When possible sources of interference exhibit low impedance characteristics, such as motor control circuits and switches which operate inductive loads.
- For computer to terminal interconnect for process, instrumentation or control applications.

Choose a Spiral Shield...


- For functional shielding against diffusion and capacitive coupling at audio frequencies only.
- When possible sources of interference are power lines and fluorescent lights.
- For applications when flexibility and flex life are major concerns, such as microphone and audio cables and retractile cords.

Choose a Combination Shield...

- For shielding against high frequency radiated emissions coupling and ESD. Combines the low resistance of braid and 100% coverage of foil shields.
- When possible sources of interference include radio transmitters, TV stations, printed circuit boards, back planes, motor control circuits and computing equipment.
- For Video, CATV, MATV, networking, computer I/O cables and computer-aided manufacturing applications.

Relative Cost Comparison

Relative cost comparisons are based on coaxial cable. Chart shows relative shield cost as one component of the total cost of the cable. These cost ratings may change depending on the physical construction of the cable.

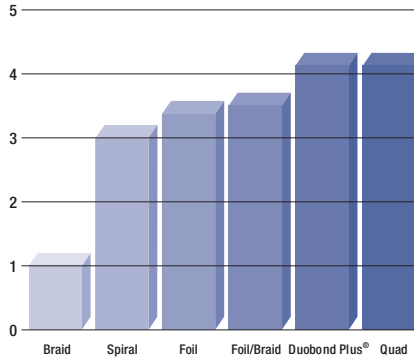

Shield Performance Comparison Chart

Frequency Range and Types of Interference Anticipated	Cable Shield Rating*				
	Braid 95% Coverage	Spiral	Foil	Foil/Braid	Foil/Braid/Foil Duobond Plus®
Frequency: DC					
Capacitive	A	AA	AAA	AAA	AAA
Diffusion	AAA	A	C	AAA	AAA
Diffusion/Inductive	—	—	—	—	—
Diffusion/Inductive/Capacitive	—	—	—	—	—
Frequency: 15 kHz					
Capacitive	A	AA	AAA	AAA	AAA
Diffusion	AAA	B	C	AAA	AAA
Diffusion/Inductive	AA	C	A	AA	AAA
Diffusion/Inductive/Capacitive	—	—	—	—	—
Frequency: 10 MHz to 1000 MHz					
Capacitive	A	AA	AAA	AAA	AAA
Diffusion	—	—	—	—	—
Diffusion/Inductive	B	C	A	AA	AAA
Diffusion/Inductive/Capacitive	B	C	A	AA	AAA

*Although ratings shown above are based on shielded coaxial cable test results, these ratings also pertain to shielded multi-conductor and flat cable where shield types are available.

Note: Shield effectiveness decreases as frequency increases. Therefore, ratings in one frequency category do not imply equal shield effectiveness in other frequency categories.

Shield Rating Key	
AAA	Best
AA	Better
A	Good
B	Functional
C	Unsatisfactory
—	Not Applicable

Cables Standards Reference Guide

National Electrical Code (NEC)[®] Catalog Reference Information

The National Electrical Code is a set of guidelines describing procedures which minimize the hazards of electrical shock, fires, and explosions caused by electrical installation. The text of the NEC is contained in nine chapters, each chapter broken into individual articles.

NEC types are acronyms consisting of a prefix describing cable type (e.g. coax, CATV, fiber optic) and a suffix indicating the type of flame test it has passed and where it can be installed. Articles describing wire and cable products—including required cable markings—are listed in the chart to the right.

Impact of the NEC

Almost everyone involved with wire and cable is affected by the National Electrical Code. In particular, the following groups must incorporate NEC guidelines into their work: OEM engineers, wire and cable product engineers, distributors, installers, and architects.

Although NEC covers wire and cable installed in factories, office buildings, hotels, motels, apartment buildings, residences, and all cables which pass through any floor, wall, ceiling, or which travel in ducts, plenums, and other air handling spaces, each individual municipality, city, county, or state can decide whether or not they wish to adopt the NEC as law. Local authorities having jurisdiction enforce their own codes. They have the right to accept or refuse any installation in accordance with their own local laws. One of the organizations local inspectors rely on to test wire and cable is Underwriters Laboratories (UL).

Intended Uses of Appliance Wiring Materials (AWM)

In the past, AWM cable was incorrectly used to wire buildings—this was never its intended use.

AWM cable is intended for internal wiring of factory-assembled, listed appliances such as computers, business machines, ranges, washers, dryers, radios, and televisions.

In some cases, AWM cable may be used for external connection. In these situations, the user should be aware that AWM cable temperatures and voltage ratings may differ from NEC ratings.

NEC Article/Type	Description	Installation Type			
		Plenum	Riser	Commercial	Residential
CL2	Class 2 cables	CL2P	CL2R	CL2	CL2X*
CL3	Class 3 cables	CL3P	CL3R	CL3	CL2X*
725	PLTC A stand-alone class. This is a power limited tray cable—a CL3-type cable which can be used outdoors, is sunlight- and moisture-resistant and must pass the Vertical Tray flame test.	(none)	(none)	PLTC	(none)
760	FPL Power limited, fire protective signaling circuit cable	FPLP	FPLR	FPL	(none)
770	OFC Fiber cable also containing metallic conductors	OFCP	OFCR	OFCG, OFC	(none)
	OFN Fiber cable only containing optical fibers	OFNP	OFNR	OFNG, OFN	(none)
800	CM Communications	CMP	CMR	CMG, CM	CMX*
820	CATV Community antenna television and radio distribution system	CATVP	CATVR	CATV	CATVX**
830	BM Network-powered broadband communications cable	BLP	BMR	BM	BLX

*Cable diameter must be less than 0.250".
**Cable diameter must be less than 0.375".

C(UL) Certifications

UL/NEC-Approved cables may also be C(UL)/CEC-Approved as communications cables meeting the requirements of the Bi-National Standard CSA C22.2 No. 214/UL 444 and Section 60 of the Canadian Electrical Code, Part I (CEC). The C(UL) cable designation (and its meaning) would be one of the following:

1. **CMP**—Cable meeting CSA FT6 or NFPA 262 (UL 910);
2. **CMR**—Cable meeting UL 1666;
3. **CMG**—Cable meeting CSA FT4 or FT4/IEEE 1202 type of flames exposure (without smoke measurements) in UL 1685;
4. **CM**—Cable meeting UL 1685 (without smoke measurement) (UL 1581, Sec. 1160) Vertical-Tray;
5. **CMX or CMUC**—meeting UL 1581, Sec. 1080 (VW-1);
6. **CMH**—Cable meeting CSA FT1.

NOTE: The CSA flame tests are defined in CSA C22.2 No. 0.3 as follows:

FT1 Vertical Flame Test — per C.S.A. C22.2 No. 0.3-92 Para 4.11.1

A finished cable shall not propagate a flame or continue to burn for more than 1 minute after five 15-second applications of the test flame. There is an interval of 15 seconds between flame applications. The flame test shall be performed in accordance with Para 4.11.1 of Canadian Standards Association

(CSA) Standard C22.2 No. 0.3. In addition, if more than 25% of the indicator flag is burned, the test cable fails.

FT4 Vertical Flame Test — Cables in Cable Trays per C.S.A. C22.2 No. 0.3-92 Para 4.11.4

The FT4 Vertical Flame Test—Cables in Cable Trays is similar to the UL-1685 Vertical Tray Flame Test, but is more severe. The FT4 test has its burner mounted at 20° from the horizontal with the burner ports facing up. The UL-1685 Vertical Tray has its burner at 0° from the horizontal. The FT4 samples must be larger than 13 mm (.512") in diameter.

If not, then the cable samples are grouped in units of at least three (3) to obtain a grouped overall diameter of 13mm. The UL-1581 Vertical Tray does not distinguish on cable size. The FT4 has a maximum char height of 1.5 m (59") measured from the lower edge of the burner face. The UL-1685 has a flame height allowable up to approximately 78" measured from the burner.

FT6 Horizontal Flame & Smoke Test — per C.S.A. C22.2 No. 0.3-92 Appendix B

Belden® products passing the FT6 Horizontal Flame and Smoke Test are designated FT6 in the column where the trade number appears. This test is for cables which must pass a Horizontal Flame and Smoke Test in accordance with ANSI/NFPA Standard 262-1985 (UL-910). The maximum flame spread shall be 1.50 meters (4.92 ft.). The smoke density shall be 0.5 at peak optical density and 0.15 at maximum average optical density.



Cables Substitution Chart

Per 2005 NEC®

FIRE-RESISTANCE LEVEL
Test Requirements

NEC ARTICLES

800 725 760 820 770 830

PLENUM

4 (Highest)

NFPA 262
(UL-910
Steiner Tunnel)

RISER

3

UL-1666
(Vertical Shaft)

GENERAL PURPOSE


2

UL-1685
Vertical Tray
or CSA FT4
(UL 1581)

RESIDENTIAL

1 (Lowest)

VW-1
(Vertical Flame)

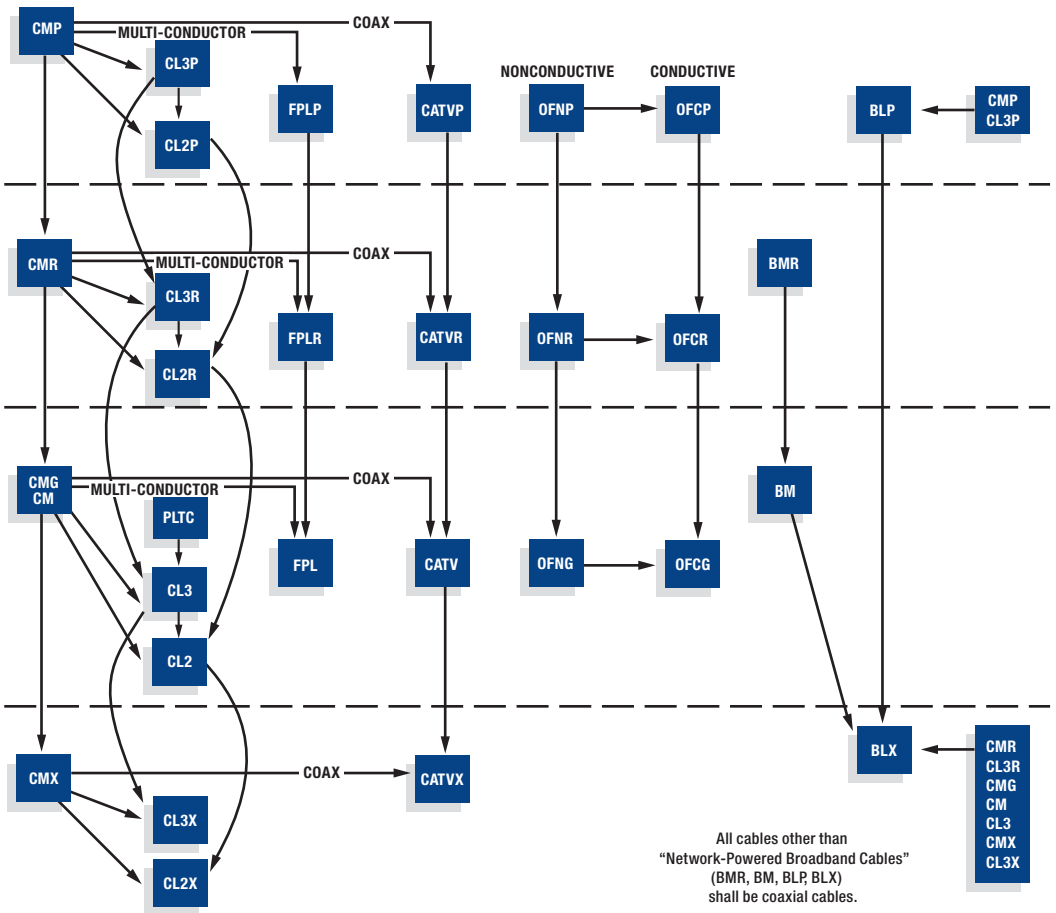


→ Cables indicated can be substituted.

NEC Type	Definition
CMP, CMR, CMG, CM, CMX	Communications Cables
CL3P, CL3R, CL3, CL3X, CL2P, CL2R, CL2, CL2X	Class 2 and Class 3 Remote-Control, Signaling and Power Limited Cables
FPLP, FPLR, FPL	Power Limited Fire Alarm Cables
CATVP, CATVR, CATV, CATVX	Community Antenna Television and Radio Distribution Cables
OFNP, OFNR, OFNG, OFN	Nonconductive Optical Fiber Cables
OFCP, OFCR, OFCG, OFC	Conductive Optical Fiber Cables
PLTC	Power Limited Tray Cables
BMR, BM, BLP, BLX	Network-powered Broadband Communications Cable

National Electrical Code and NEC are registered trademarks of the National Fire Protection Association, Inc., Quincy, MA.

Canadian Substitution Hierarchy and Catalog Terms of Use

Cable Substitution Hierarchy as per C22.2 #214 — Communication Cables

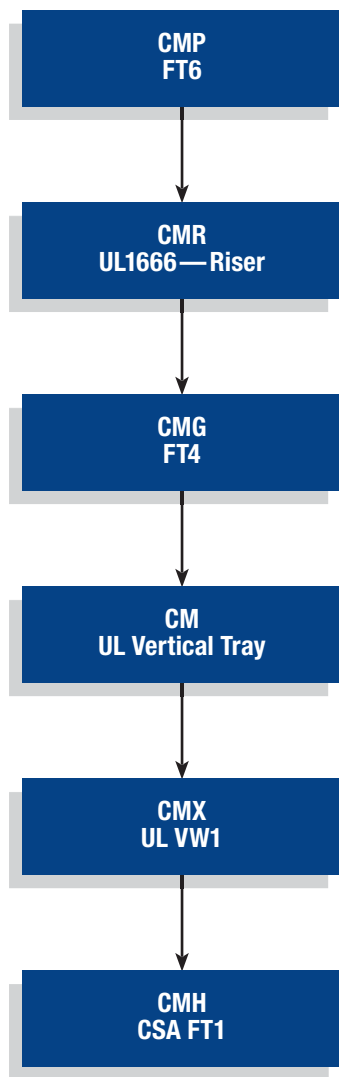

Canadian Electrical Code, Part 1, Table 19, Note 21:

The following cable substitution may be used:

- a. Communication cables marked CMP, CMR, CMG, CM, CMX, CMH, FT6, and FT4/IEEE 1202 have been found to meet the standard criteria for FT1.
- b. Communication cables marked CMP, CMR, CMG, and FT6 have been found to meet the standard criteria for FT4/IEEE 1202.
- c. Communication cables marked CMP have been found to meet the standard criteria for FT6.

Terms of Use

Use of Information; Disclaimers

Although Belden Electronics Division ("Belden") makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described in this catalog are subject to change without notice. The most current product information may be found by accessing our Website at www.belden.com or contacting Belden Technical Support at 1-800-BELDEN-1.

Belden provides the information and specifications in this catalog on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. WITH RESPECT TO SUCH INFORMATION AND SPECIFICATIONS, BELDEN DISCLAIMS ALL WARRANTIES OF MERCHANTABILITY, FITNESS FOR INTENDED PURPOSE AND NON-INFRINGEMENT. IT ALSO EXCLUDES ANY EXPRESS OR IMPLIED WARRANTIES ARISING FROM ANY COURSE OF DEALING, USAGE, TRADE PRACTICE OR PERFORMANCE. BELDEN'S SOLE WARRANTIES ARE AS BELDEN MAY PROVIDE IN (AND SUBJECT TO THE TERMS AND LIMITATIONS OF) SEPARATE WARRANTY DOCUMENTATION.

In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, inability to use, or performance of the information, specifications or products described in this catalog.

Belden's Terms and Conditions of Sale

All sales of Belden® products are subject to Belden's standard terms and conditions of sale.

Intellectual Property Protection

All trademarks or registered trademarks mentioned in this catalog are property of their respective owners. The information contained in this catalog is protected by copyright. No part of this catalog may be reproduced by any means without the prior written permission from Belden.

U.S. Export Laws

The United States Export Controls laws prohibit the export of certain technical data and software to certain territories. No content from this catalog may be reproduced or otherwise exported in violation of United States Law.

Glossary

Abrasion Resistance—Ability of a wire, cable or material to resist surface wear.

Accelerated Aging—A test that simulates long time environmental conditions in a relatively short time.

ACR—Attenuation to Crosstalk Ratio. The difference between attenuation and crosstalk, measured in dB, at a given frequency. Important characteristic in networking transmission to assure that signal sent down a twisted pair is stronger at the receiving end of the cable than are any interference signals imposed on that same pair by crosstalk from other pairs.

Alien Crosstalk—A measure of the unwanted signal coupling between cabling or components in close proximity.

American Wire Gage (AWG)—A standard for expressing wire diameter. As the AWG number gets smaller, the wire diameter gets larger.

Ampacity—Current handling capability expressed in amperes. The maximum current a conductor can carry without being heated beyond a safe limit.

Ampere—A standard unit of current. Defined as the amount of current that flows when one volt of electromotive force (EMF) is applied across one ohm of resistance. One ampere of current is produced by one coulomb of charge passing a point in one second.

Analog Signal—An electrical signal which varies continuously, not having discrete values. Analog signals are copies or representations of other waves in nature. An analog audio signal, for instance, is a representation of the pressure waves which make up audible sound.

Attenuation—The decrease in magnitude of a signal as it travels through any transmitting medium, such as a cable or circuitry. Attenuation is usually expressed logarithmically as the ratio of the original and decreased signal amplitudes. It is usually expressed in decibels (dB).

AWG—American Wire Gage. A wire diameter specification. The smaller the AWG number, the larger the wire diameter.

AWM—Appliance Wiring Material. A UL designation for a type of wire.

Balanced Line—A cable having two identical conductors which carry voltages opposite in polarity, but equal in magnitude with respect to ground, suitable for differential signal transmission.

Bandwidth—The difference between the upper and lower limits of a given band of frequencies. It is expressed in Hertz. The range of frequencies that a transmitted communications signal occupies or that a receiving system can accept. For example, it takes more bandwidth to download a

photograph in a second than to download a page of text. Virtual reality and three-dimensional audio/visual presentations require even more.

Baud—Rate of digital transmission equal to the reciprocal of the time of one output signaling element.

Bel—A unit that represents the logarithm of the ratio of two levels. One bel equals the base 10 logarithm of the ratio of two power levels. It is also equal to the base 10 logarithm of square of the ratio of two voltage or current levels, provided the impedances are the same at the two levels. (See dB.)

Belflex®—A premium hybrid matte-finish jacket material that exhibits superior flexibility at low temperatures along with resistance compared to standard PVC jacketing materials.

Beldfoil®—Belden trademark for highly effective electrostatic shield of reinforced metallic foil.

Beldsol™—Solderable Belden magnet wire combining insulating films of polyurethane for excellent dielectric characteristics and nylon for mechanical protection.

Bend Radius—Radius of curvature that a flat, round fiber optic or metallic cable can bend without any adverse effects.

Binder—A tape or thread used for holding assembled cable components in place.

Bit Error Rate—The number of errors occurring in a system per unit of time (e.g. bits per second).

Bonded Pairs™—A patented method of providing uniform electrical characteristics in twisted pairs in which the insulations of the pair are bonded so that they maintain consistent geometry of twisting when bent or otherwise stressed during and after installation.

Braid—A group of textile or metallic filaments interwoven to form a tubular flexible structure which may be applied over one or more wires or flattened to form a strap.

Braid Angle—The angle between a strand of wire in a braid shield and the longitudinal axis (i.e., axis along the length of the center) of the cable it is wound around.

Breakdown Voltage—The voltage at which the insulation between two conductors will fail and allow electricity to conduct or "arc."

Breakout—The point at which elements of a cable are separated from a multiconductor or fiber optic cable. Also called fanout.

Broadband—The technique used to multiplex multiple networks on a single cable without interfering with each other. Technologies that allow you to transmit or receive higher volumes of data at higher speeds.

Buffer—A protective coating over an optical fiber.

Bunch Strand—Conductors twisted together with the same lay and direction without regard to geometric pattern.

Buried—Cables that are required to go underground.

Bus-bar Wire—Uninsulated tinned copper wire used as a common lead.

Butyl Rubber—A synthetic rubber with good electrical insulating properties.

Cable—A group of electrically or optically conductive subcomponents twisted helically.

Cabling—The grouping or twisting together of two or more insulated conductors or subcomponents to form a cable.

Capacitance—The ability of a dielectric material between conductors to store energy when a difference of potential exists between the conductors. The unit of measurement is the farad. Cable capacitance is usually measured in picofarads (pF).

Capacitive Crosstalk—Cable crosstalk or interference resulting from the coupling of the electrostatic field of one conductor upon one or more others.

Capacitive Reactance—The opposition to alternating current due to the capacitance of a capacitor, cable or circuit. It is measured in ohms and is equal to $1/(2\pi fC)$ where pi is approximately 3.1416, f is the frequency in Hz and C is the capacitance in farads.

Capacitor—Two conducting surfaces separated by a dielectric material. The capacitance is determined by the area of the surfaces, type of dielectric and spacing between the conducting surfaces.

Cellular Polyethylene—Expanded or "foam" polyethylene, consists of individual closed cells of inert gas suspended in a polyethylene medium. The result is a desirable reduction of the dielectric constant compared to solid polyethylene, which decreases attenuation and increases the velocity of propagation.

Center-to-Center Distance—Also called pitch. Nominal distance from center-to-center of adjacent conductors within a cable. When conductors are flat, pitch is usually measured from the reference edge of a conductor to the reference edge of the adjacent conductor.

Characteristic Impedance—In a transmission cable of infinite length, the ratio of the applied voltage to the resultant current at the point the voltage is applied. Or the impedance which makes a transmission cable seem infinitely long, when connected across the cable's output terminals.

Glossary *(continued)*

Circular Mil—Area of a wire that is one-thousandth of an inch (.001 inch, one mil) in diameter. This area is $\pi/4$ of a square mil. The circular mil area (CMA, cmil) equals the diameter in mils squared. By knowing the CMA of various conductors, they can be used to determine what conductivity and gage size various combinations will produce.

Cladding—A low refractive index material that surrounds the core of an optical fiber causing the transmitted light to travel down the core and protects against surface contaminant scattering or a layer of metal applied over another. Cladding is often chosen to improve conductivity or to resist corrosion.

Coaxial Cable—A cylindrical transmission line composed of a conductor centered inside a metallic tube or shield, separated by a dielectric material, and usually covered by an insulating jacket.

Coil Effect—The inductive effect exhibited by a spiral-wrapped shield, especially above audio frequencies.

Color Code—A system of different colors or stripes used to identify components of cables such as individual conductors or groups of conductors.

Composite Cable—Cable having conductors with two or more AWG sizes or more than one cable type.

Concentric Stranding—A group of uninsulated wires twisted together and containing a center core with subsequent layers spirally wrapped around the core with alternating lay directions to form a single conductor.

Conductivity—The ability of a material to allow electrons to flow, measured by the current per unit of voltage applied. It is the reciprocal of resistivity and is measured in siemens (S) or mhos.

Conductor—A substance, usually metal, used to transfer electrical energy from point to point.

Conduit—A tube of metal or plastic through which wire or cable can be run. Used to protect the wire or cable and, in the case of metal conduit, to contain the fire of a burning wire or cable.

Connector—A device designed to allow electrical flow from one wire or cable to a device on another cable. A connector will allow interruption of the circuit or the transfer to another circuit without any cutting of wire or cable or other preparation.

Cord—A very flexible insulated cable.

Core—The light conducting central portion of an optical fiber with a refractive index higher than that of the cladding. The center of a cable construction. Most often applies to a coaxial cable, where the core is the center conductor and the dielectric material applied to it.

Corona—The ionization of gasses about a conductor that results when the potential gradient reaches a certain value.

Coupling—The transfer of energy (without direct electrical contact) between two or more cables or components of a circuit.

Coverage—The extent to which a metal shield covers an underlying surface. Measured in percent.

CPE—Chlorinated polyethylene can be used as either a thermoplastic or thermoset. It is a tough chemical- and oil-resistant material and makes an excellent jacket for industrial control cable. As a thermoset, it can be used as an oil-resistant cord jacket. Other outstanding properties include low water absorption and superior crush resistance, which are important attributes in industrial control applications.

Crosstalk—A type of interference caused by signals from one pair or cable being coupled into adjacent pairs or cables. Can occur with audio, data or RF signals.

Datalene®—Belden trademark for foam polyolefin.

dB—Decibel.

Decibel (dB)—A decibel is one-tenth of a bel and is equal to 10 times the logarithm of the power ratio, 20 times the log of the voltage ratio, or 20 times the log of the current ratio. Decibels are also used to express acoustic power, such as the apparent level of a sound. The decibel can express an actual level only when comparing with some definite reference level that is assumed to be zero dB.

Derating Factor—A multiplier used to reduce the current carrying capacity of conductors in more adverse environments, such as higher temperature, or where multiple conductors are together in one conduit.

Dielectric—An insulating (nonconducting) medium. It is the insulating material between conductors carrying a signal in a cable. In coaxial cables it is between the center conductor and the outer conductor. In twisted pair cables it is the insulation between conductors plus any surrounding air or other material.

Dielectric Breakdown—Any change in the properties of a dielectric that causes it to become conductive. Normally a catastrophic failure of an insulation because of excessive voltage. See Breakdown Voltage.

Dielectric Constant—Also called relative permittivity. That property of a dielectric which determines the amount of electrostatic energy that can be stored by the material when a given voltage is applied to it. Actually, the ratio of the capacitance of a capacitor using the dielectric to the capacitance of an identical capacitor using a vacuum (which has a dielectric constant of 1) as a dielectric. A number which indicates the quality of a material to resist holding an electrical charge when placed between two conductors.

Dielectric Heating—The heating of an insulating material when placed in a radio-frequency field, caused by internal losses during the rapid polarization reversal of molecules in the material.

Dielectric Loss—The power dissipated in a dielectric as the result of the friction produced by molecular motion when an alternating electric field is applied.

Dielectric Strength—The voltage an insulation can withstand before it breaks down. Usually expressed as volts per mil.

Dielectric Withstand Voltage—The voltage an insulation can withstand before it breaks down. Usually expressed as volts per mil.

Dispersion—The cause of bandwidth limitations in an optical fiber. Dispersion causes a broadening of input pulses along the length of the fiber. Two major types are (a) mode dispersion caused by differential optical path lengths in a multimode fiber, and (b) material dispersion caused by a differential delay of various wavelengths of light in a wave guide material.

Distortion—Any undesired change in a waveform or signal.

Drain Wire—A non-insulated wire in contact with parts of a cable, usually the shield, and used in the termination to that shield and as a ground connection.

Duobond® II—Belden trademark for a laminated shielding tape consisting of heat sensitive adhesive, aluminum foil, polyester or polypropylene and aluminum foil.

Duobond® IV—Belden trademark for a four-layer shield: (1) Duobond II foil, (2) tinned copper braid with 94% coverage, (3) Duofoil foil, (4) tinned copper braid with 90% coverage.

Duobond Plus®—Belden trademark for a foil/braid/foil connection with a shorting fold in the outermost shield.

Duofoil®—Belden trademark for a shield in which metallic foil is applied to both sides of a supporting plastic film.

Glossary (continued)

Electromagnetic Coupling—The transfer of energy by means of a varying magnetic field. Inductive coupling.

Energy Dissipation—Loss of energy from a system due to the conversion of work energy into an undesirable form, usually heat. Dissipation of electrical energy occurs when current flows through a resistance.

EPDM—Ethylene-propylene-diene monomer rubber. A chemically cross-linked elastomer with good electrical insulating properties and excellent flexibility at high and low temperatures. It has good insulation resistance and dielectric strength, as well as excellent abrasion resistance and mechanical properties. EPDM has better cut-through resistance than silicone rubber, which it replaces in some applications.

Equilay—More than one layer of helically laid wires with the length of the lay in each layer.

Expanded Polyethylene—Expanded or “foam” polyethylene, consists of individual closed cells of inert gas suspended in a polyethylene medium, resulting in a desirable reduction of the dielectric constant.

Extruded Cable—Conductors are simultaneously insulated and the cable is formed by a continuous extrusion process.

FEP—Fluorinated ethylene-propylene. A thermoplastic material with good electrical insulating properties and chemical and heat resistance.

FEXT—Far End Crosstalk. Crosstalk induced on the pairs, measured at the far end of the cable, referenced to the near end input signal. Usually expressed in decibels (dB).

Fiber—A single, separate optical transmission element characterized by core and cladding.

Fiber Optics—Light transmission through optical fibers for communication and signaling. A technology that transmits information as light pulses along a glass or plastic fiber. Optical fiber carries much more information than conventional copper wire and is generally not subject to interference. Most telephone company long-distance lines are optical fiber.

Field—An area through which electric and/or magnetic lines of force pass.

Filled—Cables that are gel filled to improve waterblocking properties.

Fillers—Non-conducting components cabled with the insulated conductors or optical fibers to impart roundness and/or tensile strength to the cable.

Flamarrest®—Belden trademark for a plenum grade chloride-based thermoplastic jacketing material with low smoke and low flame spread properties; more flexible than traditional fluorocopolymer jacket materials. Cables jacketed with Flamarrest meet the ANSI/ NFPA Standard 2621-985 (UL-910) Flame Test.

Flame Resistance—The ability of a material to resist the spread of an applied flame.

Flex Life—The qualification of the number of times a cable may bend before breaking.

Flexibility—The ability of a cable to bend in a short radius. The ability of a cable to lay flat or conform to a surface as with microphone cables.

Fluorocopolymer—Generic term for PVDF.

Foam Polyethylene—Expanded or “foam” polyethylene, consists of individual closed cells of inert gas suspended in a polyethylene medium, resulting in a desirable reduction of the dielectric constant.

FR-TPE—Flame retarded thermoplastic elastomer is a rubber-like plastic that has properties similar to rubber yet is processed as a thermoplastic. It is used as the insulation and jacket in an all TPE constructions which meets UL 13 and 1277 industrial cable requirements. It has good electrical properties, abrasion resistance, colorability, and flame retardance. This compound is ideal for cold weather applications.

Ground Conductor—A conductor in a transmission cable or line that is grounded.

Haloarrest®—Haloarrest is a non-halogenated flame retarding thermoplastic polyolefin with excellent low smoke and flame properties. It is often used as a jacket over the XLP insulated singles (non-XHHW), and the entire construction meets the UL 13 and 1277 specifications as a non-halogenated PLTC/TC cable. Haloarrest meets the European Specifications on acid gas evolution and % halogen content. This jacket can also be used with XHHW conductors for wet ratings.

HaloarrestXLink™—HaloarrestXLink is a non-halogenated flame retarding thermoset compound with excellent low smoke and flame properties. The highly oil-resistant material is used as a jacket material in control, communication, and instrumentation applications and is suited for indoor and outdoor applications. The entire construction meets the UL 13 and 1277 specifications as a non-halogenated PLTC/TC cable. HaloarrestXLink meets the European Specifications on acid gas evolution and % halogen content.

Hook-Up Wire—Single conductor wire with various types of insulation.

Impedance Match—A condition whereby the impedance of a particular circuit, cable or component is the same as the impedance of the circuit, cable or device to which it is connected.

Impedance Matching Stub—A section of transmission line or pair of conductors cut to match the impedance of a load. Also called matching stub.

Insulation Stress—The molecule separation pressure caused by a potential difference across an insulator. The practical stress on insulation is expressed in volts per mil.

Interference—Disturbances of an electrical or electromagnetic nature that introduce undesirable responses into other electronic equipment.

Ionization—The formation of ions. Ions are produced when polar compounds are dissolved in a solvent and when a liquid, gas, or solid is caused to lose or gain electrons due to the passage of an electric current.

Ionization Voltage—The potential at which a material ionizes. The potential at which an atom gives up an electron.

Jacket—Pertaining to wire and cable, the outer protective covering that may also provide additional insulation.

Matte Finish PVC—A special formulation of PVC which very closely looks and feels like rubber. See Belflex®.

Mutual Capacitance—Effective capacitance between two conductors when the effects of the other conductors and shield, if present, are removed.

Neoprene—A synthetic rubber with good resistance to oil, chemical, and flame. Also called polychloroprene.

NEXT—Near-end Crosstalk. Crosstalk induced on the pairs, measured at the end near the transmitter. Usually expressed in decibels (dB).

NFPA—National Fire Protection Association.

Noise—In a cable or circuit, any extraneous signal which tends to interfere with the signal normally present in or passing through the system.

Non-Plenum—A description for a cable that does not meet the requirements of NFPA 262 (UL 910) CMP flame test. Such a cable cannot be installed in an area that is used for air return (plenum).

Nylon—An abrasion-resistant thermoplastic with good chemical resistance.

Glossary *(continued)*

Ozone—Extremely reactive form of oxygen, normally occurring around electrical discharges and present in the atmosphere in small but active quantities. In sufficient concentrations it can break down certain rubber insulations under tension (such as a bent cable).

Plastic—High polymeric substances, including both natural and synthetic products that are capable of flowing under heat and pressure, called thermoplastics. Unlike rubber and other thermoset compounds, plastics can be remelted and reused.

Plasticizer—A chemical added to plastics to make them softer and more flexible.

Plenum—A compartment or chamber to which one or more air ducts are connected and that forms part of the air distribution system. A description for a cable that passes the NFPA 262 (UL-910) CMP flame test requirements.

Polyethylene (PE)—A thermoplastic material having excellent electrical properties. Low dielectric constant, a stable dielectric constant over all frequencies, very high insulation resistance. In terms of flexibility, polyethylene can be rated stiff to very hard, depending on molecular weight and density—low density being the most flexible and the high-density, high-molecular weight formulation being very hard. Moisture resistance is rated excellent.

Polymer—A substance made of many repeating chemical units or molecules. The term polymer is often used in place of plastic, rubber or elastomer.

Polyolefin—Any of the polymers and copolymers of the ethylene family of hydrocarbons, such as polyethylene and polypropylene.

Polypropylene (PP)—A thermoplastic similar to polyethylene but stiffer and having a higher softening point (temperature). This material is primarily used as an insulation material. Typically, it is harder than polyethylene. This makes it suitable for thin wall insulations. The dielectric constant is 2.25 for solid and 1.55 for cellular designs. Also called thermoplastic urethane (TPU).

Polyurethane (PUR or TPU)—Broad class of polymers noted for good abrasion and solvent resistance. Can be in solid or cellular form. This thermoplastic material is used primarily as a cable jacket material. It has excellent oxidation, oil, and ozone resistance. Some formulations also have good flame resistance. It is a hard material with excellent abrasion resistance. It has outstanding memory properties, making it an ideal jacket material for retractile cords.

Polyvinyl Chloride (PVC)—A general purpose thermoplastic used for wire and cable insulation and jackets.

Portable Cordage—Cable with two or more twisted conductors for flexible applications. Also called flexible cord.

PP—Polypropylene.

Rated Temperature—The maximum temperature at which an electric component can operate for extended periods without loss of its basic properties.

Rated Voltage—The maximum voltage at which an electric component can operate for extended periods without undue degradation or safety hazard.

RG/U—RG is the abbreviation for radio guide, a military designation for a coaxial cable, and U stands for universal.

Rubber (Wire Insulation)—A general term used to describe wire insulations made of thermosetting elastomers, such as natural or synthetic rubbers, neoprene, butyl rubber and others.

Self-extinguishing—The characteristic of a material that extinguishes its own flame after the igniting flame is removed.

Separator—Pertaining to wire and cable, a layer of insulating material such as textile, paper, Mylar®, etc., which is placed between a conductor and its dielectric, between a cable jacket and the components it covers, or between various components of a multiple-conductor cable. It can be used to improve stripping qualities, flexibility or can offer additional mechanical or electrical protection to the components it separates.

Sheath—Pertaining to wire and cable, the outer protective covering, also called jacket, that may also provide additional insulation.

Shield—A tape, serve or braid (usually copper, aluminum or other conductive material) placed around or between electric circuits or cables or their components, to prevent signal leakage or interference.

Shield Coverage—The optical percentage of a cable actually covered by shielding material.

Shield Effectiveness—The relative ability of a shield to screen out undesirable interference or prevent signal leakage out of the cable. Frequently confused with the term shield coverage.

Shield Percentage—The percentage of physical area of a circuit or cable actually covered by shielding material.

Signal—Any visible or audible indication which can convey information. Also, the information conveyed through a communication system.

Silicone—A material made from silicon and oxygen. Can be in thermosetting elastomer or liquid form. The thermosetting elastomer form is noted for high heat resistance. This is a very soft thermoset insulation. It has excellent electrical properties plus ozone resistance, low moisture absorption, weather resistance, and radiation resistance. It typically has low mechanical strength and poor scuff resistance.

Single-mode Fiber—An optical fiber waveguide in which only one mode will propagate. The fiber has a very small core diameter of approximately 8 micro meters. It permits signal transmission at extremely high bandwidths and is generally used with laser diodes.

Thermoplastic—A material which will soften, flow or distort appreciably when subjected to sufficient heat and pressure. Examples are polyvinyl chloride and polyethylene.

Thermoset—A material which will not soften, flow or distort appreciably when subjected to heat and pressure. Vulcanizable. Examples are rubber and neoprene.

Triaxial Cable—A cable construction having a conductor and two isolated braid shields, all insulated from each other. A coaxial cable with a second braid applied over an inner jacket and an outer jacket applied over the outer braid. Commonly used in television camera systems.

Twinax Cable—Cable with two twisted conductors with established electrical properties (one pair = two conductors sharing a common axis = twinax).

Twisted Pair—Two lengths of insulated conductors twisted together. Gets its name because two insulated copper wires are twisted together, both of which are needed for each connection.

VW-1—A flammability rating established by Underwriters Laboratories for wires and cables that pass a specially designed vertical flame test, formerly designed FR-1.

XLP—Cross-linked poly is a thermoset and is cross linked by radiation, thermally, or by moisture. XLP offers a wide range of operating temperatures, excellent deformation, abrasion, and flame resistance. XLP can be formulated with halogenated or non-halogenated flame retardant packages. Some grades are also rated XHHW-2 which offers excellent wet electrical properties.

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
453W	61	1095A	86	1495A	75	3028A	73	3112A	80	7110W	58
1000A	80	1096A	86	1498A	75	3029A	71	3113A	80	7111W	58
1006A	80	1097A	89	1499A	75	3030A	73	3115A	80	7111WS	59
1012A	80	1098A	89	1503A	203	3031A	73	3118A	89	7113W	58
1013A	80	1099A	89	1504A	203	3032A	73	3119A	39	7116W	58
1018A	80	1100A	89	1508A	208	3033A	73	3120A	39	7117W	58
1023A	80	1101A	80	1526A	70	3034A	72	3124A	39	7122W	58
1030A	74	1114A	81	1527A	87	3035A	72	3125A	39	7123WS	59
1031A	76	1115A	81	1528A	74	3036A	73	3126A	39	7125W	58
1032A	72	1116A	81	1529A	72	3037A	73	3130A	89	7126W	58
1033A	68	1117A	81	1883A	208	3038A	73	3131A	41	7127W	58
1034A	75	1118A	87	2100A	32	3039A	73	3132A	41	7129W	58
1035A	74	1119A	89	2101A	32	3041A	72	5000FM	183	7129WS	59
1036A	73	1120A	84	2102A	32	3042A	72	5000FZ	181	7136WS	59
1037A	88	1121A	86	2103A	32	3043A	74	5000UZ	181	7145W	58
1038A	85	1211A	184	2104A	32	3044A	76	5002FM	183	7200A	63
1039A	88	1212A	184	2106A	32	3045A	76	5020FM	183	7201A	63
1040A	88	1213A	184	2107A	32	3046A	76	5020FZ	181	7202A	63
1041A	88	1214A	184	2108A	32	3047A	76	5020UM	182	7203A	63
1042A	88	1242A	162	2109A	32	3048A	76	5020UZ	181	7205A	63
1043A	88	1266A	203	2110A	32	3049A	76	5022FM	183	7206A	63
1044A	88	1268A	228	2111A	32	3050A	74	5022FZ	181	7400W	60
1045A	88	1269A	228	2112A	32	3051A	75	5022UM	182	7401W	60
1046A	88	1327A	31	2113A	32	3052A	76	5100FM	183	7401WS	62
1047A	88	1328A	31	2114A	32	3053A	76	5100FZ	181	7402W	60
1048A	85	1329A	31	2115A	32	3054A	76	5100UZ	181	7403W	60
1049A	85	1330A	31	2116A	32	3055A	76	5102FM	183	7403WS	62
1050A	85	1331A	31	2117A	32	3056A	74	5120FM	183	7404W	60
1051A	85	1332A	31	2118A	32	3057A	75	5120FZ	181	7404WS	62
1052A	85	1333A	31	2119A	32	3064A	86	5120UM	182	7405W	60
1053A	85	1334A	31	2120A	32	3067A	70	5120UZ	181	7406W	60
1054A	85	1335A	33	2121A	32	3068A	73	5122FM	183	7407W	60
1055A	88	1336A	33	2122A	32	3069A	76	5122UM	182	7408W	60
1056A	68	1345F	37	2123A	32	3072F	44	5200FM	183	7408WS	62
1057A	68	1346F	38	2124A	32	3073F	44	5200FZ	181	7409W	60
1058A	68	1348A	38	2125A	32	3074F	44	5200UZ	181	7410W	60
1059A	68	1349A	38	2126A	32	3076F	31, 34	5202FM	183	7410WS	62
1060A	68	1359A	31	2127A	33	3077F	33	5220FM	183	7411W	60
1061A	68	1360A	32	2128A	33	3078F	33	5220FZ	181	7411WS	62
1062A	68	1361A	32	2129A	33	3079A	34	5220UM	182	7412W	60
1063A	84	1362A	32	2130A	33	3079E	34	5220UZ	181	7413W	60
1064A	84	1363A	32	2131A	33	3080A	90	5222FM	183	7413WS	62
1065A	84	1364A	32	2132A	33	3081A	91	5222FZ	181	7414W	60
1066A	84	1365A	32	2133A	33	3082A	36	5222UM	182	7415W	60
1067A	84	1366A	32	2134A	33	3082F	36	5300FM	183	7415WS	62
1068A	84	1367A	32	2135A	33	3083A	37	5302FM	183	7416W	60
1069A	87	1419A	220	3000A	66	3084A	37	5304FM	183	7416WS	62
1070A	87	1420A	220	3001A	66	3084F	37	5306FM	183	7417W	60
1071A	87	1421A	220	3002A	67	3085A	37	5320FM	183	7417WS	62
1072A	87	1422A	220	3003A	67	3086A	38	5320UM	182	7418W	60
1073A	87	1423A	220	3004A	66	3087A	38	5322FM	183	7421W	60
1074A	87	1424A	220	3005A	66	3088A	84	5322UM	182	7422W	60
1075A	69	1425A	220	3006A	66	3088AE	85	5324FM	183	7422WS	62
1076A	69	1466A	72	3007A	66	3088CE	85	5324UM	182	7423W	60
1077A	69	1467A	72	3008A	66	3089A	86	5326FM	183	7423WS	62
1078A	69	1468A	72	3009A	66	3090A	87	5326UM	182	7424W	60
1079A	69	1471A	72	3010A	66	3090AE	88	6051	121	7425W	60
1080A	69	1472A	72	3011A	66	3090CE	88	6054	121	7426W	60
1081A	69	1474A	72	3012A	66	3091A	89	6059	121	7427W	60
1082A	69	1475A	72	3013A	66	3092A	40	6060	121	7427WS	62
1083A	70	1476A	72	3014A	66	3092F	40, 41	6157	123	7428W	60
1084A	70	1477A	72	3015A	66	3093A	40	6163	123	7428WS	62
1085A	70	1480A	72	3016A	68	3094A	41	6164	123	7429W	60
1086A	70	1481A	72	3017A	70	3095A	41	6179	123	7429WS	62
1087A	84	1484A	74	3018A	70	3102A	78	6193	123	7430W	60
1088A	84	1485A	74	3020A	70	3103A	91	7101W	58	7435W	61
1089A	87	1486A	74	3021A	70	3105A	35	7102W	58	7435WS	62
1090A	87	1489A	74	3022A	70	3106A	35	7105W	58	7436W	61
1091A	69	1490A	74	3023A	70	3107A	35	7106W	58	7438W	61
1092A	70	1492A	75	3024A	70	3108A	35	7106WS	59	7438WS	62
1093A	86	1493A	75	3025A	72	3109A	35	7107W	58	7439W	61
1094A	86	1494A	75	3027A	73	3111A	80	7108W	58	7440W	61

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
7442W	61	8103	225	8450	202	8718	206	8890	149	9411	77
7444W	61	8104	225	8451	202	8719	206	8897	149	9412	78
7445W	61	8105	225	8452	234	8719NH	230	8898	149	9414	202
7445WS	62	8106	225	8453	236	8720	206	8899	149	9418	164
7447W	61	8107	225	8454	237	8722	218	8908	132	9418NH	188
7447WS	62	8108	225	8455	237	8723	46, 210	8910	132	9420	187, 237
7450WS	62	8110	225	8456	163	8723NH	230	8915	132	9421	163
7500A	63	8112	225	8457	163	8723SB	210	8916	132	9422	187, 237
7501A	63	8115	225	8458	163	8724	217	8917	132	9423	163
7502A	63	8118	225	8459	163	8725	218	8918	132	9424	187, 237
7503A	63	8125	225	8461	198	8728	217	8919	132	9425	187, 237
7504A	63	8132	226	8461NH	230	8729	164	8920	132	9427	187, 237
7895A	37	8132FO	220	8465	162	8730	217	9154	205	9429	187, 237
7896A	36	8133	226	8466	162	8732	215	9154NH	230	9430	163
7897A	36	8134	226	8467	162	8734	166	9155	218	9431	163
7900A	36	8134FO	220	8468	162	8735	165	9156	198	9432	163
7918A	18	8135	226	8469	162	8737	216	9156NH	230	9433	163
7919A	16	8135FO	220	8471	199	8740	200	9157	198	9434	163
7921A	16	8138	226	8471NH	230	8741	200	9159	198	9439	162
7922A	18	8138FO	220	8472	234	8742	200	9160	200	9444	162
7923A	18	8142	226	8473	199	8743	200	9161	198	9445	162
7924A	18	8142FO	220	8477	199	8744	200	9182	43	9451	203
7927A	15	8148	226	8478	234	8747	201	9184	207	9451D	203
7928A	19	8155	226	8479	235	8748	201	9207	43	9451DP	204
7929A	16	8162	229	8484	186	8749	201	9250	43	9451P	204
7930A	18	8164	229	8486	198	8750	201	9260	165	9451SB	203
7931A	15	8165	229	8489	162	8751	207	9261	165	9455	162
7932A	19	8166	229	8489NH	188	8752	202	9271	43	9457	162
7933A	19	8167	229	8500	133	8757	200	9272	43	9460	205
7934A	19	8168	229	8501	133	8759	216	9302	207	9461	202
7935A	19	8170	229	8502	133	8760	46, 205	9305	207	9462	202
7936A	17	8175	229	8503	133	8760NH	230	9306	207	9462NH	230
7937A	17	8178	229	8504	133	8761	202	9309	207	9463	42
7938A	17	8185	229	8505	133	8761NH	230	9312	78	9463DB	42
7939A	16	8205	198	8520	133	8762	205	9314	77	9463F	42
7940A	15	8208	215	8521	133	8762NH	230	9315	207	9486	84
7953A	15	8263	229	8522	133	8763	218	9316	74	9487	87
7957A	16	8302	223	8523	133	8764	209	9318	71	9488	90
7958A	16	8303	223	8524	133	8766	209	9319	207	9489	91
8000	151	8304	223	8525	133	8767	209	9320	68	9491	67
8011	151	8305	223	8527	133	8768	209	9322	65	9492	69
8012	151	8306	223	8529	133	8769	211	9327	207	9493	73
8013	151	8307	223	8530	133	8770	163	9328	65	9494	75
8019	151	8308	223	8538	133	8770NH	188	9329	65	9495	77
8020	151	8310	223	8597	133	8771	163	9330	65	9498	162
8021	151	8312	223	8618	163	8771NH	188	9331	65	9501	219
8022	151	8315	223	8619	162	8772	163	9332	65	9502	219
8023	151	8318	223	8620	161	8772NH	188	9333	65	9503	219
8024	151	8325	223	8621	161	8773	211	9335	65	9504	219
8025	151	8332	224	8622	161	8774	211	9341	84	9505	219
8049	150	8333	224	8623	161	8775	211	9342	87	9506	219
8050	150	8334	224	8624	161	8776	211	9343	90	9507	219
8051	150	8335	224	8627	161	8777	46, 211	9344	91	9508	219
8052	150	8336	224	8628	161	8777NH	230	9363	67	9509	219
8053	150	8337	224	8629	161	8777SB	211	9364	69	9510	219
8054	150	8340	224	8641	208	8778	211	9365	73	9512	65
8055	150	8342	224	8641NH	230	8780	216	9366	75	9513	65
8056	150	8345	224	8643	165	8786	173	9367	77	9514	65
8057	150	8348	224	8660	151	8787	172	9368	71	9515	219
8058	150	8355	224	8661	151	8788	173	9369	71	9516	65
8073	150	8434	217	8662	151	8790	49, 216	9388	71	9519	219
8074	150	8437	215	8663	151	8791	166	9389	71	9520	65
8075	150	8441	215	8668	151	8794	162	9390	71	9521	65
8076	150	8442	163	8669	151	8795	162	9391	71	9524	65
8077	150	8442NH	188	8670	151	8800	134	9392	71	9525	219
8078	150	8443	163	8673	186	8816	134	9402	214	9526	65
8079	150	8443NH	230	8675	186	8824	134	9405	187	9527	65
8080	150	8444	163	8677	186	8825	134	9406	210	9531	134
8081	150	8444NH	188	8678	186	8866	148	9407	65	9533	174
8083	150	8445	163	8690	198	8868	148	9408	68	9534	174
8085	150	8446	187	8691	198	8869	148	9409	71	9535	174
8102	225	8448	187	8692	198	8888	233	9410	74	9536	174

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
9537	174	9740NH	230	9907	45	11700A	18	21113	106	21185	106
9538	174	9741	198	9908	132	11700A2	18	21114	106	21186	106
9539	174	9742	198	9909	130	11872A	15	21115	106	21187	106
9540	174	9743	198	9910	132	19105	235	21116	106	21188	106
9541	174	9744	201	9911	130	19106	235	21117	106	21189	106
9542	174	9745	201	9912	132	19107	235	21118	106	21190	106
9543	174	9746	201	9916	131	19108	235	21119	106	21191	106
9544	174	9747	201	9917	130	19109	235	21120	106	21192	106
9545	174	9748	201	9918	131	19115	233	21121	106	21193	106
9546	174	9750	198	9919	131	19120	234	21122	106	21194	106
9550	219	9751	198	9920	131	19122	233	21123	106	21195	106
9552	71	9752	198	9921	131	19123	233	21124	106	21196	106
9553	71	9755	198	9923	131	19124	235	21125	106	21197	106
9554	71	9767	211	9924	132	19125	235	21126	106	21198	106
9556	71	9768	211	9925	177	19126	233	21127	106	21199	106
9559	71	9769	211	9926	131	19129	235	21128	106	21200	106
9562	200	9770	164	9927	177	19130	235	21129	106	21201	106
9563	71	9770NH	188	9928	131	19140	234	21130	106	21202	106
9565	71	9772	172	9929	177	19201	234	21131	106	21203	106
9566	200	9773	214	9930	131	19202	234	21132	106	21204	106
9570	200	9774	214	9931	177	19203	234	21133	106	21205	106
9571	178	9775	214	9932	177	19204	234	21134	106	21206	106
9572	178	9776	214	9933	177	19205	235	21135	106	21207	106
9574	179	9777	214	9934	177	19206	235	21136	106	21208	106
9575	179	9794	162	9935	177	19207	235	21137	106	21209	106
9576	178	9802	184	9936	177	19208	235	21138	106	21210	106
9578	179	9803	184	9937	177	19209	235	21139	106	21211	106
9579	179	9804	226	9938	177	19216	237	21140	106	21212	106
9580	178	9805	226	9939	176	19217	237	21141	106	21213	106
9581	179	9806	226	9940	176	19227	234	21142	106	21214	106
9582	178	9807	226	9941	176	19228	234	21143	106	21215	106
9583	179	9808	226	9942	176	19229	235	21144	106	21216	106
9585	200	9809	226	9943	176	19230	235	21145	106	21217	106
9608	174	9812	226	9944	176	19348	235	21146	106	21218	106
9609	174	9813	226	9945	176	19349	235	21147	106	21219	106
9610	174	9814	226	9946	176	19350	236	21148	106	21220	106
9611	174	9819	226	9947	176	19352	235	21149	106	21221	106
9612	174	9825	226	9948	176	19353	235	21150	106	21222	106
9613	174	9829	224	9949	176	19354	235	21151	106	21223	106
9614	174	9830	224	9950	176	19362	236	21152	106	21224	106
9615	174	9831	224	9951	185	19363	236	21153	106	21225	106
9616	174	9832	224	9952	185	19364	236	21154	106	21226	106
9617	174	9833	224	9953	185	19401	236	21155	106	21227	106
9618	174	9834	224	9954	185	19402	236	21156	106	21228	106
9619	174	9835	224	9961	185	19403	236	21157	106	21229	106
9620	161	9836	224	9962	185	19404	233	21158	106	21230	106
9621	161	9837	224	9963	185	19405	233	21159	106	21231	106
9622	161	9839	224	9964	185	19500	234	21160	106	21232	106
9623	161	9841	227	9965	185	19501	234	21161	106	21233	106
9626	162	9841NH	230	9966	185	19502	234	21162	106	21234	106
9637	175	9842	227	9967	185	19503	236	21163	106	21235	106
9641	175	9842NH	230	9968	185	19504	236	21164	106	21236	106
9680	220	9843	227	9975	130	19505	236	21165	106	21237	106
9681	220	9844	227	9976	130	19506	234	21166	106	21238	106
9682	220	9855	228	9977	130	19507	234	21167	106	21239	106
9683	220	9860	43, 49	9978	130	19508	234	21168	106	21240	106
9684	220	9867	148	9979	130	19509	236	21169	106	21241	106
9685	217	9873	214	9980	130	19510	236	21170	106	21242	106
9696	228	9874	214	9981	130	19511	236	21171	106	21243	106
9721	161	9875	214	9982	130	21100	106	21172	106	21244	106
9728	49, 221	9876	214	9983	130	21101	106	21173	106	21245	106
9729	46, 49, 221	9877	214	9984	130	21102	106	21174	106	21246	106
9729NH	230	9879	214	9985	130	21103	106	21175	106	21247	106
9730	49, 221	9880	45	9986	130	21104	106	21176	106	21248	106
9731	221	9883	214	9987	130	21105	106	21177	106	21249	106
9732	221	9886	214	9989	131	21106	106	21178	106	21250	106
9734	221	9890	184	9990	209	21107	106	21179	106	21251	106
9735	221	9892	49	9991	209	21108	106	21180	106	21252	106
9736	221	9894	184	9992	209	21109	106	21181	106	21253	106
9737	221	9899	149	9993	209	21110	106	21182	106	21254	106
9738	221	9904	133	9995	209	21111	106	21183	106	21255	106
9740	198	9906	133	9998	236	21112	106	21184	106	21256	106

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
21257	106	21362	113	21435	113	21528	113	21602	113	21675	114
21258	106	21363	113	21436	113	21529	113	21603	113	21676	114
21259	106	21364	113	21437	113	21530	113	21604	113	21677	114
21260	106	21365	113	21438	113	21531	113	21605	113	21678	114
21261	106	21366	113	21439	114	21532	113	21606	113	21679	114
21262	106	21367	113	21440	114	21533	113	21607	113	22000	106
21263	106	21368	113	21441	114	21534	113	21608	113	22001	106
21264	106	21369	113	21442	114	21535	113	21609	113	22002	106
21265	106	21370	113	21443	114	21536	113	21610	113	22003	106
21266	106	21371	113	21444	114	21537	113	21611	113	22004	106
21267	106	21372	113	21445	114	21538	113	21612	113	22005	106
21300	113	21373	113	21446	114	21539	114	21613	113	22006	106
21301	113	21374	113	21447	114	21540	114	21614	113	22007	106
21302	113	21375	113	21448	114	21541	114	21615	113	22008	106
21303	113	21376	113	21450	114	21542	114	21616	113	22009	106
21304	113	21377	113	21451	114	21543	114	21617	113	22010	106
21305	113	21378	113	21452	114	21544	114	21618	113	22011	106
21306	113	21379	113	21453	114	21545	114	21619	113	22012	106
21307	113	21380	113	21454	114	21546	114	21620	113	22013	106
21308	113	21381	113	21455	114	21547	114	21621	113	22014	107
21309	113	21382	113	21456	114	21548	114	21622	113	22015	107
21310	113	21383	113	21457	114	21550	113	21623	113	22016	107
21311	113	21384	113	21458	114	21551	113	21624	113	22017	107
21312	113	21385	113	21459	114	21552	113	21625	113	22018	107
21313	113	21386	113	21460	114	21553	113	21626	113	22019	107
21314	113	21387	113	21461	114	21554	113	21627	113	22020	107
21315	113	21388	113	21462	114	21555	113	21628	113	22021	107
21316	113	21389	114	21463	114	21556	113	21629	113	22022	107
21317	113	21390	114	21464	114	21557	113	21630	113	22023	107
21318	113	21391	114	21465	114	21558	113	21631	113	22024	107
21319	113	21392	114	21466	114	21559	113	21632	113	22025	107
21320	113	21393	114	21467	114	21560	113	21633	113	22027	106
21321	113	21394	114	21468	114	21561	113	21634	113	22028	106
21322	113	21395	114	21469	114	21562	113	21635	113	22029	106
21323	113	21396	114	21470	114	21563	113	21636	113	22030	106
21324	113	21397	114	21471	114	21564	113	21637	113	22031	106
21325	113	21398	114	21472	114	21565	113	21638	113	22032	106
21326	113	21400	113	21473	114	21566	113	21639	114	22033	106
21327	113	21401	113	21474	114	21567	113	21640	114	22034	106
21328	113	21402	113	21475	114	21568	113	21641	114	22035	106
21329	113	21403	113	21476	114	21569	113	21642	114	22036	106
21330	113	21404	113	21477	114	21570	113	21643	114	22037	106
21331	113	21405	113	21478	114	21571	113	21644	114	22038	106
21332	113	21406	113	21479	114	21572	113	21645	114	22039	106
21333	113	21407	113	21500	113	21573	113	21646	114	22040	106
21334	113	21408	113	21501	113	21574	113	21647	114	22041	107
21335	113	21409	113	21502	113	21575	113	21648	114	22042	107
21336	113	21410	113	21503	113	21576	113	21650	114	22043	107
21337	113	21411	113	21504	113	21577	113	21651	114	22044	107
21338	113	21412	113	21505	113	21578	113	21652	114	22045	107
21339	114	21413	113	21506	113	21579	113	21653	114	22046	107
21340	114	21414	113	21507	113	21580	113	21654	114	22047	107
21341	114	21415	113	21508	113	21581	113	21655	114	22048	107
21342	114	21416	113	21509	113	21582	113	21656	114	22049	107
21343	114	21417	113	21510	113	21583	113	21657	114	22050	107
21344	114	21418	113	21511	113	21584	113	21658	114	22051	107
21345	114	21419	113	21512	113	21585	113	21659	114	22052	107
21346	114	21420	113	21513	113	21586	113	21660	114	22054	106
21347	114	21421	113	21514	113	21587	113	21661	114	22055	106
21348	114	21422	113	21515	113	21588	113	21662	114	22056	106
21350	113	21423	113	21516	113	21589	114	21663	114	22057	106
21351	113	21424	113	21517	113	21590	114	21664	114	22058	106
21352	113	21425	113	21518	113	21591	114	21665	114	22059	106
21353	113	21426	113	21519	113	21592	114	21666	114	22060	106
21354	113	21427	113	21520	113	21593	114	21667	114	22061	106
21355	113	21428	113	21521	113	21594	114	21668	114	22062	106
21356	113	21429	113	21522	113	21595	114	21669	114	22063	106
21357	113	21430	113	21523	113	21596	114	21670	114	22064	106
21358	113	21431	113	21524	113	21597	114	21671	114	22065	106
21359	113	21432	113	21525	113	21598	114	21672	114	22066	106
21360	113	21433	113	21526	113	21600	113	21673	114	22067	106
21361	113	21434	113	21527	113	21601	113	21674	114	22068	107

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
22069	107	22647	108	23567	111	26525	111	27124A	96	27278	100
22070	107	22648	108	23568	110	26526	111	27125A	96	27279	100
22071	107	22654	108	23571	111	26527	111	27126A	96	27280	100
22072	107	22660	109	23575	110	26528	111	27127A	96	27281	101
22073	107	22662	109	23578	111	26529	111	27128A	96	27282	101
22074	107	22663	109	24500	112	26530	110	27129A	96	27283	101
22075	107	22670	108	24501	112	26531	110	27130A	96	27284	101
22076	107	22671	108	24502	112	26532	110	27131A	96	27285	101
22077	107	22672	109	24503	112	26533	110	27132A	96	27286	101
22078	107	22673	109	24504	112	26534	110	27133A	96	27287	101
22079	107	22674	109	24505	112	26535	110	27134A	96	27288	101
22100	115	22675	109	24506	112	26536	110	27135A	96	27289	101
22101	115	22676	108	24507	112	26537	110	27136A	96	27290	101
22102	115	22677	109	24508	112	26538	110	27137A	96	27291	101
22103	115	22678	109	24509	112	26539	111	27138A	97	27292	100
22104	115	22679	109	24510	112	26540	111	27139A	97	27293	101
22105	115	22680	109	24511	112	26541	111	27140A	97	27323A	94
22106	115	22681	109	24512	112	26542	111	27141A	97	27324A	94
22107	115	22682	109	24513	112	26543	111	27142A	97	27325A	93
22108	115	22683	109	24514	112	26544	111	27143A	97	27325AS	93
22110	115	22684	109	24515	112	26545	111	27144A	97	27326A	93
22114	115	22685	108	24516	112	26546	110	27145A	97	27326AS	93
22118	115	22686	108	24517	112	26547	111	27146A	97	27327A	93
22120	115	22687	109	24518	112	26551	110	27147A	97	27328A	93
22121	115	22688	109	24519	112	26553	111	27148A	97	27329A	93
22122	115	22689	109	24520	112	26555	110	27149A	97	27330A	94
22123	115	23500	110	25500	112	27080A	94	27150A	97	27331A	94
22124	115	23501	110	25501	112	27081A	94	27151A	97	27331AS	94
22125	115	23503	110	25502	112	27081AS	95	27152A	97	27334A	93
22126	115	23505	111	25503	112	27082A	95	27153A	97	27334AS	93
22127	115	23506	110	25504	112	27082AS	95	27154A	97	27335A	93
22128	115	23507	111	25505	112	27083A	95	27155A	98	27336A	93
22130	115	23508	111	25506	112	27084A	95	27156A	98	27337A	94
22134	115	23509	110	25507	112	27085A	95	27157A	98	27338A	94
22138	115	23510	110	25508	112	27086A	95	27158A	98	27339A	94
22140	115	23511	110	25509	112	27087A	95	27159A	98	27340A	94
22141	115	23512	111	25510	112	27088A	95	27160A	98	27341A	94
22142	115	23513	110	25511	112	27089A	95	27161A	98	27428	102
22143	115	23514	110	25512	112	27090A	95	27243	100	27429	102
22144	115	23515	111	25513	112	27091A	95	27244	100	27430	102
22145	115	23516	111	25514	112	27092A	95	27245	100	27431	102
22146	115	23519	110	25517	112	27093A	95	27246	100	27432	100
22147	115	23520	111	25518	112	27094A	95	27247	100	27433	100
22148	115	23521	110	25519	112	27095A	95	27248	100	27434	100
22150	115	23522	111	25520	112	27096A	95	27249	100	27535	100
22152	115	23523	111	25522	112	27097A	95	27250	100	27538	100
22154	115	23524	110	25523	112	27098A	95	27251	100	27539	100
22160	116	23525	110	26500	110	27099A	95	27252	100	27540	100
22161	116	23526	111	26501	110	27100A	95	27253	100	27541	101
22162	116	23527	110	26502	111	27101A	95	27254	100	27600A	93
22170	116	23528	110	26503	110	27102A	95	27255	100	27601A	93
22171	116	23529	111	26504	110	27103A	95	27256	100	27602A	93
22180	116	23530	110	26505	110	27104A	95	27257	101	27603A	93
22181	116	23531	110	26506	110	27105A	95	27258	101	27604A	93
22603	109	23532	110	26507	110	27106A	95	27259	101	27605A	93
22628	108	23533	110	26508	110	27107A	95	27260	101	27606A	93
22629	108	23534	110	26509	111	27108A	95	27261	101	27607A	93
22630	108	23536	111	26510	111	27109A	96	27262	101	27608A	93
22631	108	23537	111	26511	111	27110A	96	27263	101	27609A	93
22632	108	23538	110	26512	111	27111A	96	27264	101	27610A	93
22633	108	23539	110	26513	111	27112A	96	27265	101	27611A	93
22634	108	23541	111	26514	110	27113A	96	27267	101	27612A	93
22635	108	23542	110	26515	110	27114A	96	27268	101	27613A	93
22636	108	23543	110	26516	110	27115A	96	27269	100	27614A	93
22637	108	23544	110	26517	110	27116A	96	27270	100	27615A	94
22638	108	23545	111	26518	110	27117A	96	27271	100	27616A	94
22639	108	23546	111	26519	110	27118A	96	27272	100	27617A	94
22640	108	23547	111	26520	110	27119A	96	27273	100	27618A	94
22641	108	23548	111	26521	110	27120A	96	27274	100	27619A	94
22643	108	23549	111	26522	111	27121A	96	27275	100	27620A	94
22645	108	23550	111	26523	111	27122A	96	27276	100	27621A	94
22646	108	23554	110	26524	111	27123A	96	27277	100		

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
27622A	94	27912A	95	28434	100	29018	118	29539	48, 51	33316	145
27623A	94	27916A	93	28535	100	29019	118	29540	48, 51	33318	145
27624A	94	27917A	94	28538	100	29020	118	29541	48, 51	33320	145
27625A	94	27969	100	28539	100	29021	118	29542	48, 51	33322	145
27626A	94	28167A	98	28540	100	29022	118	29543	48, 51	33390	145
27627A	94	28168A	98	28541	101	29023	118	29544	48, 49, 51	33414	145
27628A	94	28169A	98	28840	103	29024	118	29545	48, 49, 51	33416	145
27629A	95	28170A	98	28841	103	29025	118	29546	48, 49, 51	33418	145
27630A	96	28171A	98	28842	103	29030	118	29547	48, 49, 51	34017	147
27632A	93	28172A	98	28843	103	29031	118	29550C	48, 55	34020	147
27633A	94	28173A	98	28844	103	29032	118	29551C	48, 55	34400	142
27634A	96	28174A	98	28845	103	29033	118	29552C	48, 55	34401	142
27636A	94	28175A	98	28846	103	29034	118	29553C	48, 55	34402	142
27641A	96	28176A	98	28847	103	29035	118	29554C	48, 55	34403	142
27643A	97	28177A	98	28848	103	29036	118	29555C	48, 55	34404	142
27840	103	28178A	98	28849	103	29038	118	29556C	48, 55	34406	142
27841	103	28243	100	28850	103	29040	118	29557C	48, 55	34408	142
27842	103	28244	100	28851	103	29043	118	29558C	48, 49, 55	34410	142
27843	103	28245	100	28852	103	29048	118	29559C	48, 49, 55	34412	142
27844	103	28246	100	28853	103	29053	118	29560C	48, 49, 55	34414	142
27845	103	28247	100	28854	103	29058	118	29561C	48, 49, 55	34416	142
27846	103	28248	100	28855	103	29068	118	30800	147	34418	142
27847	103	28249	100	28856	103	29078	118	30801	147	34430	142
27848	103	28250	100	28857	103	29500	48, 50	30802	147	34440	142
27849	103	28251	100	28858	103	29500T	48, 52	30804	147	34490	142
27850	103	28252	100	28859	103	29500X	48, 53	30806	147	34491	142
27851	103	28253	100	28860	103	29501	48, 50	30808	147	34916	142
27852	103	28254	100	28861	103	29501T	48, 52	30810	146	34918	142
27853	103	28255	100	28862	103	29501X	48, 53	30812	146	34920	142
27854	103	28256	100	28863	103	29502	48, 50	30814	146	34922	142
27855	103	28257	101	28864	103	29502T	48, 52	30816	146	35410	141
27856	103	28258	101	28865	103	29502X	48, 53	30818	146	35412	141
27857	103	28259	101	28866	104	29503	48, 50	30820	146	35414	141
27858	103	28260	101	28867	104	29503T	48, 52	30830	147	35416	141
27859	103	28261	101	28868	104	29503X	48, 53	30840	147	35418	141
27860	103	28262	101	28869	104	29504	48, 50	30890	147	35420	141
27861	103	28263	101	28870	104	29504T	48, 52	31008N	141	35606	140
27862	103	28264	101	28871	104	29504X	48, 53	31010	141	35608	140
27863	103	28265	101	28872	104	29505	48, 50	31010N	141	35610	140
27864	103	28267	101	28873	104	29505T	48, 52	31012	141	35612	140
27865	103	28268	101	28874	104	29505X	48, 53	31012N	141	35614	140
27866	104	28269	100	28875	104	29506	48, 50	31014	141	35616	140
27867	104	28270	100	28876	104	29506T	48, 52	31014N	141	35618	140
27868	104	28271	100	28877	104	29506X	48, 53	31502	144	35620	140
27869	104	28272	100	28878	104	29507	48, 50	31504	144	35622	140
27870	104	28273	100	28879	104	29507T	48, 52	31506	144	35716	140
27871	104	28274	100	28880	104	29507X	48, 53	31508	144	35718	140
27872	104	28275	100	28881	104	29510	48, 50	31510	144	35720	140
27873	104	28276	100	28882	104	29511	48, 50	31512	144	35722	140
27874	104	28277	100	28883	104	29512	48, 50	31514	144	36100	143
27875	104	28278	100	28884	104	29513	48, 50	31516	144	36101	143
27876	104	28279	100	28885	103	29528	48, 50	31518	144	36102	143
27877	104	28280	100	28886	103	29528T	48, 52	31520	144	36104	143
27878	104	28281	101	28887	103	29528X	48, 53	32410	147	36106	143
27879	104	28282	101	28888	104	29529	48, 49, 50	32412	147	36108	143
27880	104	28283	101	28889	104	29529T	48, 49, 52	32414	147	36140	143
27881	104	28284	101	28890	105	29529X	48, 49, 53	32416	147	36190	143
27882	104	28285	101	28891	105	29530	48, 49, 50	32418	147	37100	138
27883	104	28286	101	28892	105	29530T	48, 49, 52	32516	144	37101	138
27884	104	28287	101	28893	105	29530X	48, 49, 53	32518	144	37102	138
27885	103	28288	101	28894	104	29531	48, 49, 50	32718	132	37103	138
27886	103	28289	101	28895	104	29531T	48, 49, 52	32720	132	37104	138
27887	103	28290	101	28896	104	29531X	48, 49, 53	32722	132	37106	138
27888	104	28291	101	28969	100	29532	48, 49, 50	32820	131	37108	138
27889	104	28292	100	29004	118	29532T	48, 49, 52	32822	131	37110	138
27890	105	28293	101	29005	118	29532X	48, 49, 53	33302	145	37112	138
27891	105	28428	102	29006	118	29533	48, 49, 51	33304	145	37114	138
27892	105	28429	102	29007	118	29534	48, 49, 51	33306	145	37116	138
27893	105	28430	102	29008	118	29535	48, 49, 51	33308	145	37118	138
27894	104	28431	102	29009	118	29536	48, 48, 51	33310	145	37130	138
27895	104	28432	100	29016	118	29537	48, 51	33312	145	37140	138
27896	104	28433	100	29017	118	29538	48, 51	33314	145	37190	138

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
37212	139	83048	137	83905	81	1229503	54	B9A842	29	B9B842	29
37214	139	83049	137	83910	81	1229504	54	B9A844	29	B9B844	29
37216	139	83050	137	83915	81	1229505	54	B9A845	29	B9B845	29
37218	139	83303E	171	83930	81	1229506	54	B9A846	29	B9B846	29
37220	139	83304E	171	83932	81	1229507	54	B9A847	29	B9B847	29
37222	139	83305E	171	83950	81	1229528	54	B9A848	29	B9B848	29
37500	139	83306E	171	83951	81	1229529	54	B9A849	29	B9B849	29
37501	139	83307E	171	83952	81	1229530	54	B9A890	28	B9B890	28
37502	139	83308E	171	83953	81	1229531	54	B9A891	28	B9B891	28
37504	139	83317E	171	83954	81	1229532	54	B9A892	28	B9B892	28
37506	139	83318E	171	83955	81	1329528	54	B9A893	28	B9B893	28
37508	139	83319E	171	85102	169	1329529	54	B9A894	28	B9B894	28
37530	139	83320E	171	85103	169	1329530	54	B9A895	28	B9B895	28
37540	139	83321E	171	85109	169	1329531	54	B9A896	28	B9B896	28
37590	139	83322E	171	85164	208	1329532	54	B9A897	28	B9B897	28
39110	135	83332E	171	85168	208	B9A150	30	B9B150	30	B9C150	30
39112	135	83333E	171	85220	169	B9A151	30	B9B151	30	B9C151	30
39114	135	83334E	171	85221	169	B9A152	30	B9B152	30	B9C152	30
39116	135	83335E	171	85230	170	B9A153	30	B9B153	30	B9C153	30
39118	135	83336E	171	85231	170	B9A154	30	B9B154	30	B9C154	30
39120	135	83337E	171	85240	170	B9A155	30	B9B155	30	B9C155	30
39122	135	83347E	171	85241	170	B9A159	30	B9B159	30	B9C159	30
39124	135	83348E	171	87723	213	B9A170	30	B9B170	30	B9C170	30
39126	135	83349E	171	87740	200	B9A171	30	B9B171	30	B9C171	30
39128	135	83350E	171	87760	205	B9A172	30	B9B172	30	B9C172	30
82418	164, 167	83351E	171	87761	204	B9A173	30	B9B173	30	B9C173	30
82442	167, 199	83352E	171	87777	212	B9A174	30	B9B174	30	B9C174	30
82444	167	83393	170	87778	212	B9A175	30	B9B175	30	B9C175	30
82489	167	83394	170	88442	167, 199	B9A179	30	B9B179	30	B9C179	30
82502	219	83395	170	88444	167	B9A202	27	B9B202	27	B9C202	27
82503	219	83396	170	88489	167	B9A204	27	B9B204	27	B9C204	27
82504	219	83503	168	88641	208, 219	B9A205	27	B9B205	27	B9C205	27
82505	219	83504	168	88723	46, 213	B9A206	27	B9B206	27	B9C206	27
82506	219	83506	168	88741	199	B9A207	27	B9B207	27	B9C207	27
82509	219	83509	168	88757	199	B9A209	27	B9B209	27	B9C209	27
82641	208, 219	83512	168	88760	205	B9A211	27	B9B211	27	B9C211	27
82723	213	83515	168	88761	204	B9A215	27	B9B215	27	B9C215	27
82729	222	83552	168	88770	167	B9A381T	28	B9B381T	28	B9C381T	28
82740	200	83553	168	88777	212	B9A382T	28	B9B382T	28	B9C382T	28
82741	199	83554	168	88778	212	B9A384T	28	B9B384T	28	B9C384T	28
82742	199	83556	168	89182	43	B9A386T	28	B9B386T	28	B9C386T	28
82743	199	83559	168	89418	167	B9A389T	28	B9B389T	28	B9C389T	28
82757	199	83562	168	89463	42	B9A391T	28	B9B391T	28	B9C391T	28
82760	205	83569	168	89503	219	B9A393T	28	B9B393T	28	B9C393T	28
82761	204	83602	168	89504	219	B9A398T	28	B9B398T	28	B9C398T	28
82777	212	83604	168	89505	219	B9A500T	26	B9B500T	26	B9C500T	26
82778	212	83606	168	89696	228	B9A502T	26	B9B502T	26	B9C502T	26
82841	227	83609	168	89728	222	B9A505T	26	B9B505T	26	B9C505T	26
82842	227	83612	168	89729	222	B9A507T	26	B9B507T	26	B9C507T	26
83000	136	83652	168	89730	49, 222	B9A509T	26	B9B509T	26	B9C509T	26
83001	136	83653	168	89731	222	B9A510T	26	B9B510T	26	B9C510T	26
83002	136	83654	168	89732	222	B9A511T	26	B9B511T	26	B9C511T	26
83003	136	83656	168	89740	200	B9A513T	26	B9B513T	26	B9C513T	26
83004	136	83659	168	89841	227	B9A520T	26	B9B520T	26	B9C520T	26
83005	136	83662	168	89842	227	B9A810	26	B9B810	26	B9C810	26
83006	136	83702	168	89855	228	B9A811	26	B9B811	26	B9C811	26
83007	136	83703	168	89880	45	B9A812	26	B9B812	26	B9C812	26
83008	136	83704	168	89907	45	B9A813	26	B9B813	26	B9C813	26
83009	137	83706	168	121700A	18	B9A814	26	B9B814	26	B9C814	26
83010	137	83709	168	121700R	18	B9A815	26	B9B815	26	B9C815	26
83023	136	83712	168	121872A	15	B9A816	26	B9B816	26	B9C816	26
83025	136	83715	168	123092A	40	B9A817	26	B9B817	26	B9C817	26
83026	136	83719	168	123107A	35	B9A820	29	B9B820	29	B9C820	29
83027	136	83752	180	129463	42	B9A821	29	B9B821	29	B9C821	29
83028	136	83753	180	139463	42	B9A822	29	B9B822	29	B9C822	29
83029	136	83754	180	183076F	31	B9A830	26	B9B830	26	B9C830	26
83030	136	83756	180	183079A	34	B9A831	26	B9B831	26	B9C831	26
83041	137	83802	180	183092A	40	B9A832	26	B9B832	26	B9C832	26
83043	137	83803	180	189463	42	B9A833	26	B9B833	26	B9C833	26
83045	137	83804	180	1229500	54	B9A834	26	B9B834	26	B9C834	26
83046	137	83806	180	1229501	54	B9A840	29	B9B840	29	B9C840	29
83047	137	83900	81	1229502	54	B9A841	29	B9B841	29	B9C841	29



Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
B9C842	29	B9E842	29	B9W842	29	C5621	123	I1A0466	23	I6W1266	23
B9C844	29	B9E844	29	B9W844	29	C5622	123	I1A0655	23	I6W1855	23
B9C845	29	B9E845	29	B9W845	29	C5625	123	I1A0666	23	I6W1866	23
B9C846	29	B9E846	29	B9W846	29	C5626	123	I1C0255	23	I6W2455	23
B9C847	29	B9E847	29	B9W847	29	C5627	123	I1C0266	23	I6W2466	23
B9C848	29	B9E848	29	B9W848	29	C5635	123	I1C0455	23	I6W3655	23
B9C849	29	B9E849	29	B9W849	29	C5701	122	I1C0466	23	I6W3666	23
B9C890	28	B9E890	28	B9W890	28	C5702	122	I1C0655	23	I6W4855	23
B9C891	28	B9E891	28	B9W891	28	C5730	122	I1C0666	23	I6W4866	23
B9C892	28	B9E892	28	B9W892	28	C5731	122	I1E0255	23	I6W6055	23
B9C893	28	B9E893	28	B9W893	28	C5732	122	I1E0266	23	I6W6066	23
B9C894	28	B9E894	28	B9W894	28	C5760	122	I1E0455	23	I6W7255	23
B9C895	28	B9E895	28	B9W895	28	C5761	122	I1E0466	23	I6W7266	23
B9C896	28	B9E896	28	B9W896	28	C5762	122	I1E0655	23	I100255	23
B9C897	28	B9E897	28	B9W897	28	C6064	119	I1E0666	23	I100266	23
B9E150	30	B9W150	30	B96551	24	E500001 010S1	21	I1W0255	23	I100455	23
B9E151	30	B9W151	30	B96566	24	E500002 010S1	21	I1W0266	23	I100466	23
B9E152	30	B9W152	30	B96567	24	E500003 010S1	21	I1W0455	23	I100655	23
B9E153	30	B9W153	30	B96570	24	E500005 010S1	21	I1W0466	23	I100666	23
B9E154	30	B9W154	30	B96571	24	E500025 010S1	21	I1W0655	23	I400855	23
B9E155	30	B9W155	30	B96572	24	E501001 010S1	21	I1W0666	23	I400866	23
B9E159	30	B9W159	30	B96575	24	E501002 010S1	21	I4A0855	23	I601255	23
B9E170	30	B9W170	30	B96639	24	E501003 010S1	21	I4A0866	23	I601266	23
B9E171	30	B9W171	30	C5500	119	E501005 010S1	21	I4C0855	23	I601855	23
B9E172	30	B9W172	30	C5501	119	E502001 010S1	21	I4C0866	23	I601866	23
B9E173	30	B9W173	30	C5502	119	E502002 010S1	21	I4E0855	23	I602455	23
B9E174	30	B9W174	30	C5503	119	E502003 010S1	21	I4E0866	23	I602466	23
B9E175	30	B9W175	30	C5504	119	E502005 010S1	21	I4W0855	23	I603655	23
B9E179	30	B9W179	30	C5505	119	E502025 010S1	21	I4W0866	23	I603666	23
B9E202	27	B9W202	27	C5506	119	E503001 010S1	21	I6A1255	23	I604855	23
B9E204	27	B9W204	27	C5508	119	E503002 010S1	21	I6A1266	23	I604866	23
B9E205	27	B9W205	27	C5510	119	E503003 010S1	21	I6A1855	23	I606055	23
B9E206	27	B9W206	27	C5513	119	E503005 010S1	21	I6A1866	23	I606066	23
B9E207	27	B9W207	27	C5518	119	E504001 010S1	21	I6A2455	23	I607255	23
B9E209	27	B9W209	27	C5523	119	E504002 010S1	21	I6A2466	23	I607266	23
B9E211	27	B9W211	27	C5528	119	E504003 010S1	21	I6A3655	23	R601001 010S1	20
B9E215	27	B9W215	27	C5529	119	E504005 010S1	21	I6A3666	23	R601002 010S1	20
B9E381T	28	B9W381T	28	C5530	119	E504025 010S1	21	I6A4855	23	R601003 010S1	20
B9E382T	28	B9W382T	28	C5531	119	E505001 010S1	21	I6A4866	23	R601005 010S1	20
B9E384T	28	B9W384T	28	C5532	119	E505002 010S1	21	I6A6055	23	R605001 010S1	20
B9E386T	28	B9W386T	28	C5533	119	E505003 010S1	21	I6A6066	23	R605002 010S1	20
B9E389T	28	B9W389T	28	C5534	119	E505005 010S1	21	I6A7255	23	R605003 010S1	20
B9E391T	28	B9W391T	28	C5535	119	E506001 010S1	21	I6A7266	23	R605005 010S1	20
B9E393T	28	B9W393T	28	C5536	119	E506002 010S1	21	I6C1255	23		
B9E398T	28	B9W398T	28	C5538	119	E506003 010S1	21	I6C1266	23		
B9E500T	26	B9W500T	26	C5540	119	E506005 010S1	21	I6C1855	23		
B9E502T	26	B9W502T	26	C5543	119	E506025 010S1	21	I6C1866	23		
B9E505T	26	B9W505T	26	C5548	119	E507001 010S1	21	I6C2455	23		
B9E507T	26	B9W507T	26	C5553	119	E507002 010S1	21	I6C2466	23		
B9E509T	26	B9W509T	26	C5558	119	E507003 010S1	21	I6C3655	23		
B9E510T	26	B9W510T	26	C5560	120	E507005 010S1	21	I6C3666	23		
B9E511T	26	B9W511T	26	C5561	120	E600001 010S1	20	I6C4855	23		
B9E513T	26	B9W513T	26	C5562	120	E600002 010S1	20	I6C4866	23		
B9E520T	26	B9W520T	26	C5563	120	E600003 010S1	20	I6C6055	23		
B9E810	26	B9W810	26	C5564	120	E600005 010S1	20	I6C6066	23		
B9E811	26	B9W811	26	C5565	120	E600025 010S1	20	I6C7255	23		
B9E812	26	B9W812	26	C5566	120	E601001 010S1	20	I6C7266	23		
B9E813	26	B9W813	26	C5568	120	E601002 010S1	20	I6E1255	23		
B9E814	26	B9W814	26	C5570	120	E601003 010S1	20	I6E1266	23		
B9E815	26	B9W815	26	C5573	120	E601005 010S1	20	I6E1855	23		
B9E816	26	B9W816	26	C5578	120	E604001 010S1	20	I6E1866	23		
B9E817	26	B9W817	26	C5579	120	E604002 010S1	20	I6E2455	23		
B9E820	29	B9W820	29	C5580	120	E604003 010S1	20	I6E2466	23		
B9E821	29	B9W821	29	C5581	120, 122	E604005 010S1	20	I6E3655	23		
B9E822	29	B9W822	29	C5582	120, 122	E604025 010S1	20	I6E3666	23		
B9E830	26	B9W830	26	C5583	120, 122	E605001 010S1	20	I6E4855	23		
B9E831	26	B9W831	26	C5590	122	E605002 010S1	20	I6E4866	23		
B9E832	26	B9W832	26	C5591	122	E605003 010S1	20	I6E6055	23		
B9E833	26	B9W833	26	C5592	122	E605005 010S1	20	I6E6066	23		
B9E834	26	B9W834	26	C5601	123	I1A0255	23	I6E7255	23		
B9E840	29	B9W840	29	C5602	123	I1A0266	23	I6E7266	23		
B9E841	29	B9W841	29	C5611	123	I1A0455	23	I6W1255	23		

Be Certain with Belden



GLOBAL LOCATIONS

For Worldwide Sales
and Technical Support,
Visit: www.belden.com



UNITED STATES

Division Headquarters – Americas

2200 U.S. Highway 27 South
Richmond, IN 47374

Phone: 765-963-5200
info@belden.com
www.belden.com

MEXICO

Regional Office

Avenida los Nogales #290
Fraccionamiento San Carlos
Nogales, Sonora
Mexico
Salesmex@belden.com
www.belden.com

**LATIN AMERICA/
CARIBBEAN ISLANDS**

**Contact for
Poliron and Belden**

Avenida Maria Leonor 1222
Diadema, São Paulo
Brazil

Phone: 55 11 4092 9000

**EUROPE/MIDDLE
EAST/AFRICA**

Division Headquarters – EMEA

Edisonstraat 9
5928 PG Venlo, 5900 AA,
Postbus 9
The Netherlands

Phone: 31-773-878-555
venlo.salesinfo@belden.com
www.beldenemea.com

ASIA-PACIFIC

Division Headquarters – APAC

7/F Harbour View 2
16 Science Park East Avenue
Hong Kong Science Park
Shatin, Hong Kong

Phone: 852-2955-0128
hongkong.sales@belden.com