


## Obstruction light system controller including Ethernet connection

**Controller for use with Orga obstruction light systems for on & offshore windfarm applications. The CIP400 provides full system operation management, advanced control facilities, status information, and system diagnostics through an Ethernet port.**

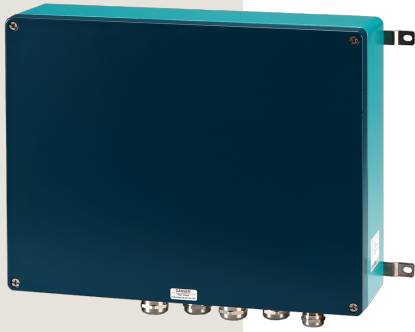

### Key features

- Controller for systems with Orga aeronautical obstruction lights, Helihoist lights, Search and Rescue, ID lights & Visibility sensors
- System status monitoring and alarm interface
- Manual Control override of connected lights
- Control options: Modbus, Webserver over TCP/IP & hard wired I/O
- Simple cable connection for easy installation
- Supplied with EMC cable glands / blind plugs
- Two year warranty
- No maintenance required over service life

### Standards / certification

- ICAO Annex 14, volume I; International standards and recommended practices: Aerodrome design and operations, 6th Edition, July 2013, chapter 6 (for systems incl. CIP400 controllers and obstruction lights)
- United States Federal Aviation Administration AC 70/7460-1K; Obstruction Marking and Lighting, February 2007 (for systems incl. CIP400 controllers and obstruction lights)
- Various national approvals (for systems incl. CIP400 controllers and obstruction lights)

### Performance characteristics

- Controls up to ninety Orga aeronautical obstruction lights
- Ethernet interface for remote system monitoring and control
- Ethernet connection CAT6 with RJ45 connection compatible with standard IEEE 802.3u
- Overall system fail contact
- I/O interface for control using input signals
- Optional main-standby light configuration available

### Electrical characteristics


- Operating voltage: See table
- Power consumption: 1W
- Limited Overvoltage protection

### Physical characteristics

- Dimensions: see drawing
- Weight: 9kg
- Design degree of protection: IP65
- Operating temperature range: -40°C to +55°C
- AISi12 alloy painted enclosure
- Shipping information: 500x450x200 mm; 11 kg

## Obstruction light system controller including Ethernet connection

Product	Supported features									
	Operating Voltage	Med./ High intensity lights	Towerlight controller Support	Towerlight controller Support using fiber optics	Visibility meter with OrTalk connection	Reduced intensity control	Aircraft detection lighting system (ADLS)	Helihost control	Search and Rescue operation control	Additional overvoltage protection
CIP400-O-MV	120-240 Vac 50-60 Hz	X	X		X	X	X			X
CIP400-MV	120-240 Vac 50-60 Hz	X	X		X	X	X	X	X	
CIP400-TV	120-240 Vac 50-60 Hz	X		X	X	X	X	X	X	
CIP400-MV-C2	120-240 Vac 50-60 Hz	X	X		X	X	X	X	X	
CIP400-TV-C2	120-240 Vac 50-60 Hz	X		X	X	X	X	X	X	

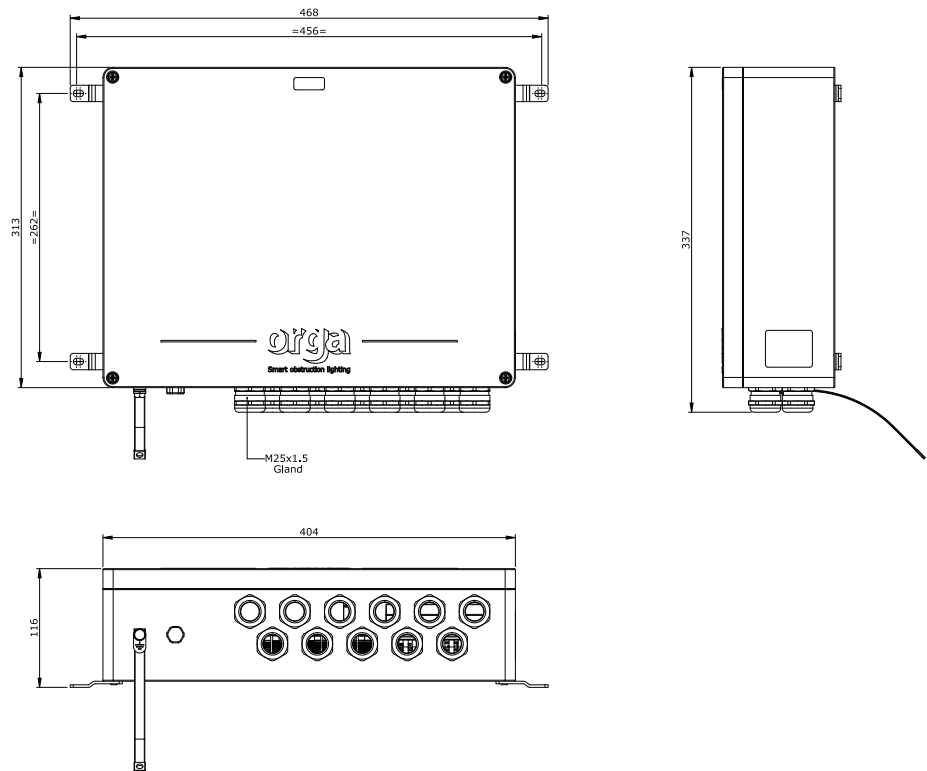

Orga BV  
Strickledeweg 13  
3125 AT SCHIEDAM  
The Netherlands

P.O. Box 3046  
3101 EA SCHIEDAM  
The Netherlands

T +31 (0)10 208 5555  
F +31 (0)10 437 8445  
info@orga.nl  
www.orga.nl