


TIGER® BRAND

# MINING CABLES

25-35kV TYPE SHD-GC & MP-GC

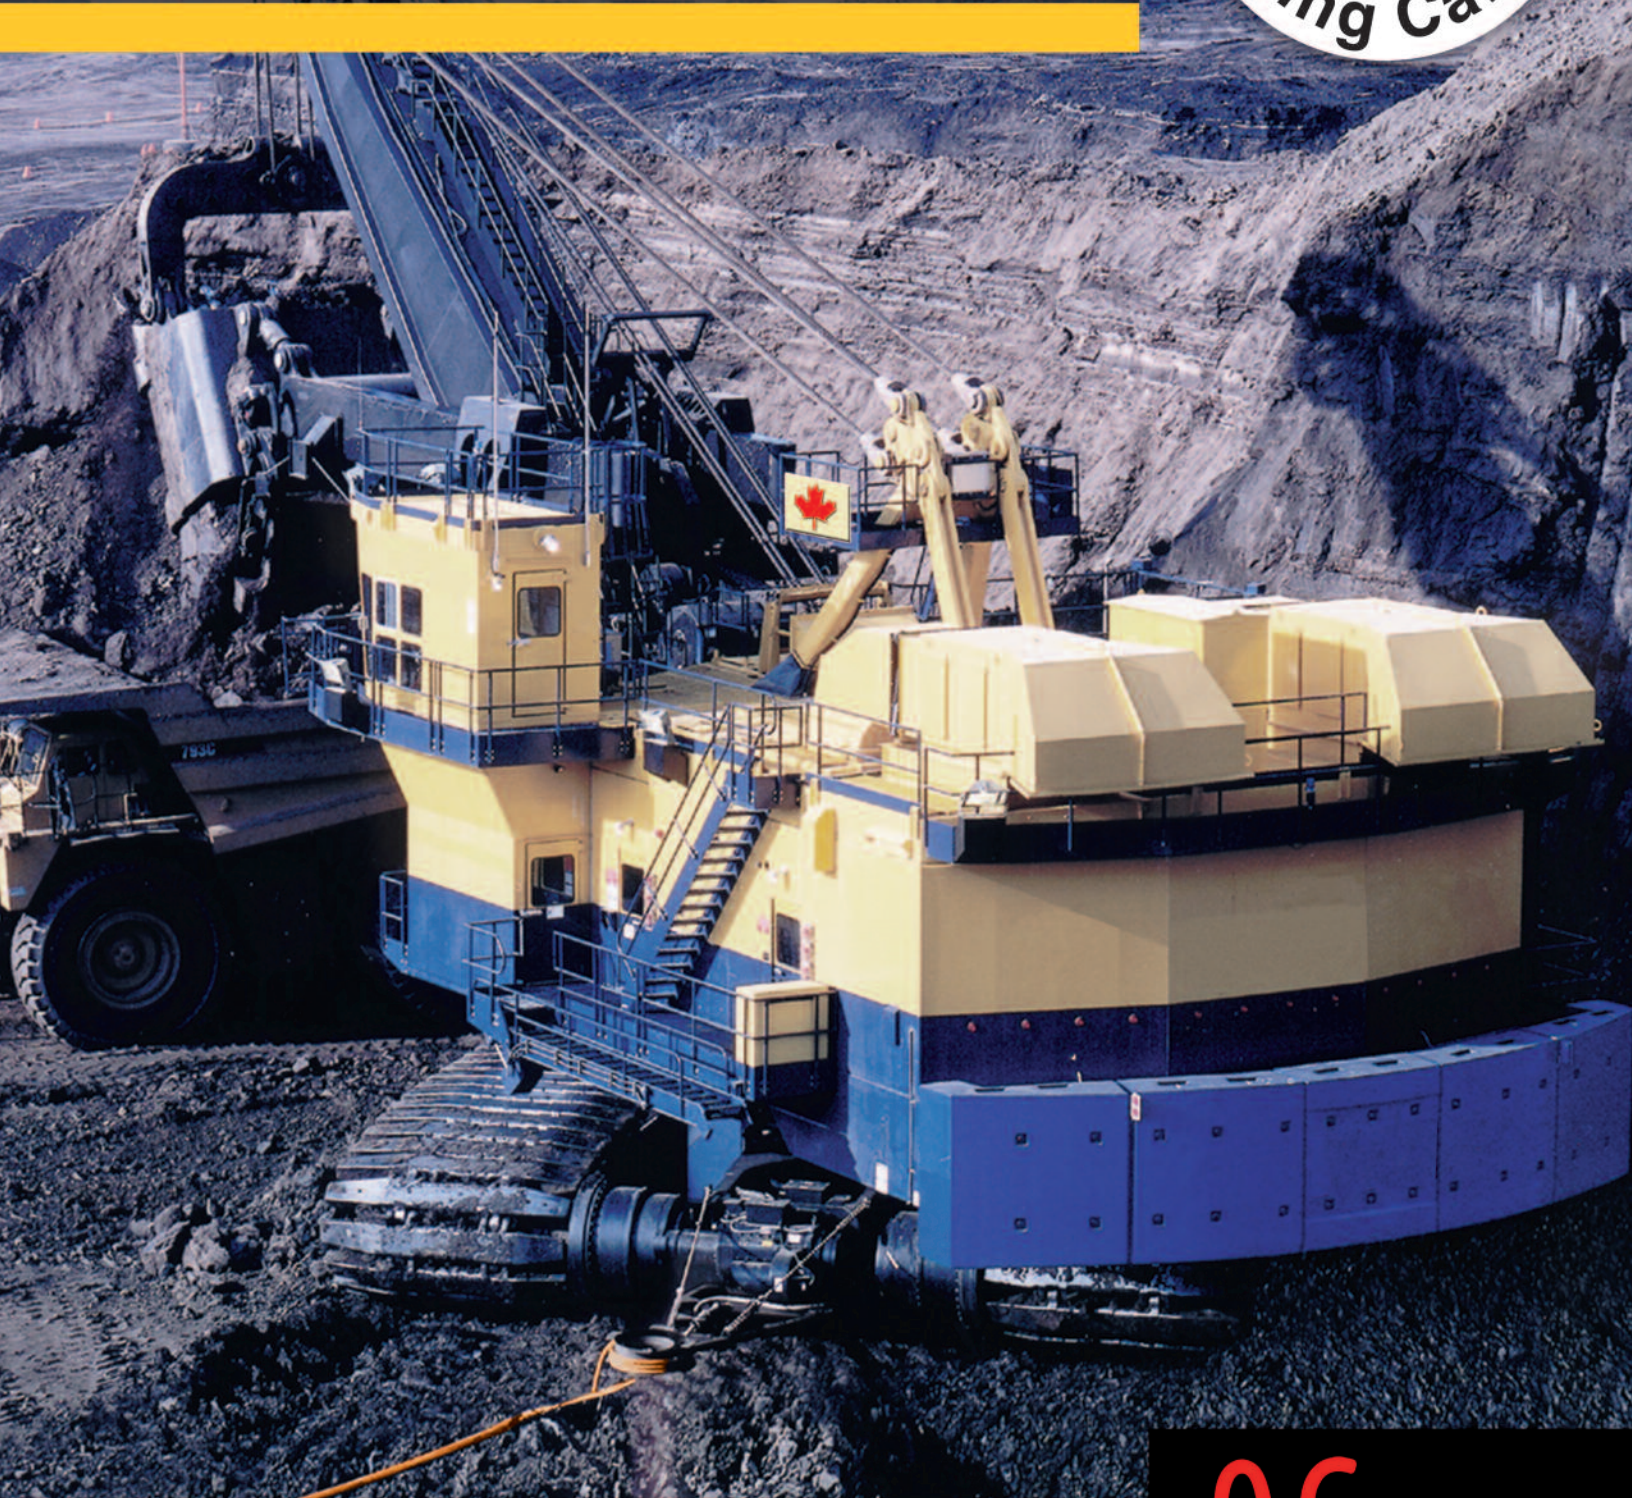

**Nexans**  
AmerCable





36-525

# TYPE SHD-GC 3/C MOLD-CURED CPE JACKET • 25000 VOLTS 100% INSULATION LEVEL

## Conductors

Flexible tinned copper

## Ground Check Conductor

Flexible tinned copper with yellow polypropylene insulation

## Strand Shield

Extruded semi-conducting layer

## Ground Wires

Flexible tinned copper

## Insulation Shielding

Semi-conducting rubber and semi-conductive tape

## Insulation Shielding

Tinned copper and color coded nylon braid

## Insulation

90°C ethylene-propylene rubber (EPR)

## Assembly

Taped core


## Jacket<sup>1</sup>

Reinforced mold-cured thermosetting Chlorinated Polyethylene (CPE) Jacket. Cable identification via permanent marking.

**See Page 13 for jacket color options.**

**Also available with Extra-Tough Thermoplastic Polyurethane (TPU) jacket for extremely abrasive environments! See page 3.**

**See Page 14 for Tiger Stripe options**



Round-shaped cross-section

## APPLICATION

Heavy duty high voltage portable power cable for use in circuits not exceeding the rated voltage. These cables are used for heavy mobile equipment such as drag lines, shovels, dredges, and for power feeders. Recommended maximum continuous conductor temperature in 90°C. Suitable for shallow water submersion.

Cable carries "LR 82346" marking indicating approval to the Canadian Standards Association specification for Portable Power Cables C22.2 No. 96-17.

Tiger® Brand Mining Cable meets or exceeds ICEA Standards S-75-381/NEMA WC-58, ASTM B-172 and B-33.



## RATINGS & APPROVALS

- Canadian Standards Association C22.2 No. 96 File 82346, FT1, FT4, FT5, -50°C Type SHD, SHD-GC, SHD-BGC up to 25kV
- CSA rated TC-ER
- Suitable for direct burial
- Mine Safety & Health Administration 184-MSHA.
- Pennsylvania Department of Environmental Protection P-184.
- Insulated Cable Engineers Association S-75-381/NEMA WC-58. Design standard for mining cables.

Tiger® Brand is a registered trademark of AmerCable Incorporated

## 36-525 • TYPE SHD-GC 3/C • CPE JACKET • 25000 VOLTS

36-525-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG*	Nominal Outside Dimensions mm	Approx. Weight kg/km	Ampacity <sup>1</sup> 30°C Ambient Temp
	Size AWG*	No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	259	7.49	6	133	6.62	8	75.00	7013	210
010CSA	1/0	266	7.49	5	133	6.62	8	77.00	7562	240
020CSA	2/0	323	7.49	4	133	6.90	8	81.00	8397	274
030CSA	3/0	418	7.49	3	133	6.90	8	84.00	9528	315
040CSA	4/0	532	7.49	2	133	7.49	8	89.00	11016	360
250CSA	250	627	7.49	1	133	7.49	8	90.70	11897	396
350CSA	350	888	7.49	1/0	259	7.49	8	97.30	14534	482
500CSA	500	1221	7.49	3/0	259	7.87	8	108.00	18549	590

\* Larger GC conductor sizes available upon request.

133% insulation level available on request

<sup>1</sup> Jacket – CPE jacket. Black CPE is standard.

Colored CPE available upon request.

See page 13 for color options.

\* Ampacity – Based on continuous duty at 90°C conductor temperature.

Tolerances – +8%/-5% of nominal outside diameter



## AWG/Metric Cross Reference

AWG/kcmil Size	Area of AWG/kcmil in mm <sup>2</sup>	Nearest Standard Metric Cond. mm <sup>2</sup>
22	0.35	0.50
20	0.52	0.50
18	0.82	1.00
16	1.31	1.50
14	2.08	2.50
12	3.31	4
10	5.26	6
8	8.37	10
6	13.30	16
4	21.15	25
2	33.62	35
1	42.41	50
1/0	53.49	50
2/0	67.43	70
3/0	85.01	95
4/0	107.2	120
250	126.7	120
300	152.0	150
350	177.3	185
400	202.7	240
500	253.4	240
600	304.0	300
750	380.0	400
800	405.4	400
1000	506.7	500







36-526

# TYPE SHD-GC 3/C TPU JACKET • 25000 VOLTS 100% INSULATION LEVEL

## Conductors

Flexible tinned copper

## Ground Check Conductor

Flexible tinned copper with yellow polypropylene insulation

## Strand Shield

Extruded semi-conducting layer

## Insulation

90°C ethylene-propylene rubber (EPR)

## Ground Wires

Flexible tinned copper

## Insulation Shielding

Semi-conducting rubber and semi-conductive tape

## Jacket<sup>1</sup>



Thermoplastic Polyurethane (TPU) Jacket.  
Cable identification via permanent marking.

**Black jacket standard.**  
**See Page 13 for jacket color options.**

Also available with mold-cured thermosetting Chlorinated Polyethylene (CPE) jacket.  
**See page 1.**

## Application Note:

TPU may not be appropriate for non-mining applications.

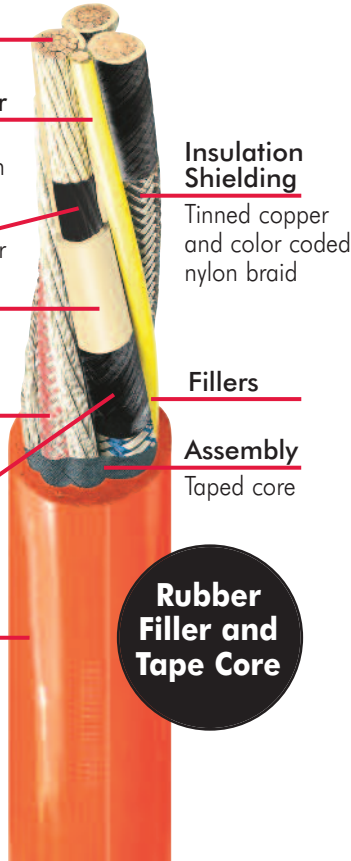

Round-shaped cross-section

## APPLICATION

Heavy duty high voltage portable power cable for use in circuits not exceeding the rated voltage. These cables are used for heavy mobile equipment such as drag lines, shovels, dredges, and for power feeders. Recommended maximum continuous conductor temperature in 90°C. Suitable for shallow water submersion.

Cable carries "LR 82346" marking indicating approval to the Canadian Standards Association specification for Portable Power Cables C22.2 No. 96-17.

Tiger® Brand Mining Cable meets or exceeds ICEA Standards S-75-381/NEMA WC-58, ASTM B-172 and B-33.



## RATINGS & APPROVALS

- Canadian Standards Association C22.2 No. 96 File 82346, FT1, FT5, -50°C  
Type SHD, SHD-GC, SHD-BGC up to 25kV
- Mine Safety & Health Administration 184-MSHA.
- Pennsylvania Department of Environmental Protection P-184.
- Insulated Cable Engineers Association S-75 381/NEMA WC-58. Design standard for mining cables.

Tiger® Brand is a registered trademark of AmerCable Incorporated

## 36-526 • TYPE SHD-GC 3/C • TPU JACKET • 25000 VOLTS

36-526-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG*	Nominal Outside Dimensions mm	Approx. Weight kg/km	Ampacity <sup>1</sup> 30°C Ambient Temp
	Size AWG*	No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	259	7.49	6	133	3.97	8	69.70	5798	210
010CSA	1/0	266	7.49	5	133	3.97	8	71.70	6225	240
020CSA	2/0	323	7.49	4	133	4.14	8	75.50	6879	274
030CSA	3/0	418	7.49	3	133	4.14	8	78.50	7973	315
040CSA	4/0	532	7.49	2	133	4.49	8	83.00	9230	360
250CSA	250	627	7.49	1	133	4.49	8	84.70	9751	396
350CSA	350	888	7.49	1/0	259	4.49	8	71.30	12748	482
500CSA	500	1221	7.49	3/0	259	4.72	8	101.70	16355	590

\* Larger GC conductor sizes available upon request.

133% insulation level available on request


<sup>1</sup> Jacket – TPU jacket. Black TPU is standard.

Colored TPU available upon request.

See page 13 for color options.

\* Ampacity – Based on continuous duty at 90°C conductor temperature.

Tolerances – +8%/-5% of nominal outside diameter

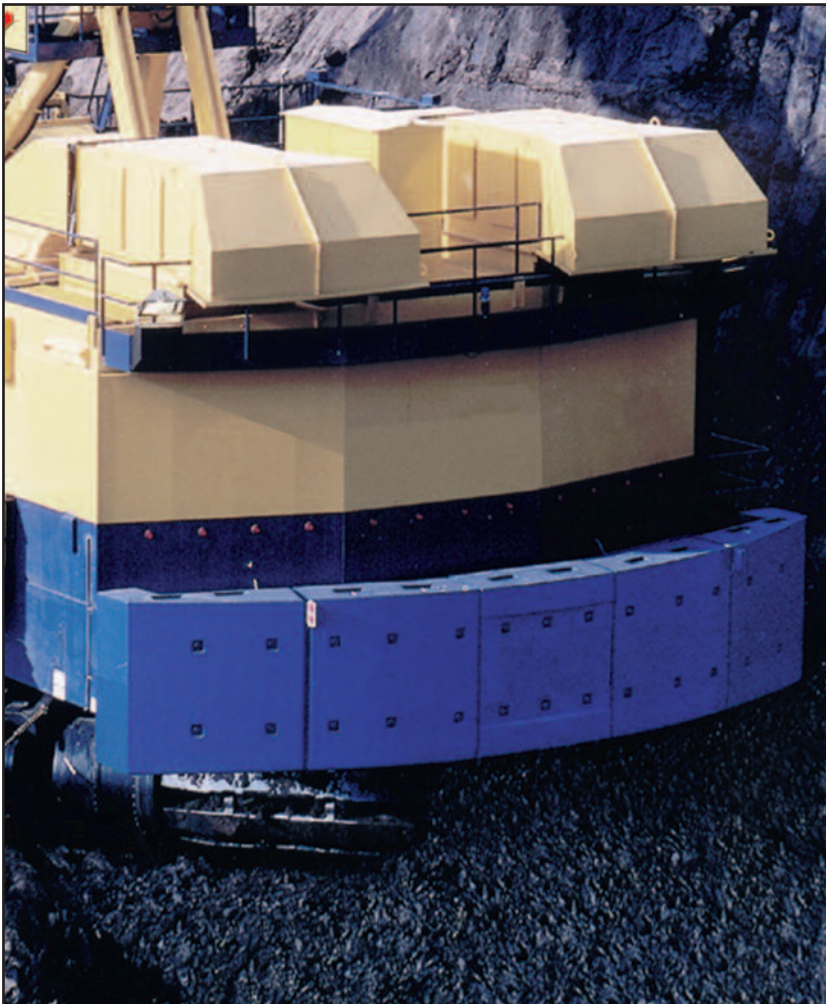

## AWG/Metric Cross Reference

AWG/ kcmil Size	Area of AWG/kcmil in mm <sup>2</sup>	Nearest Standard Metric Cond. mm <sup>2</sup>
22	0.35	0.50
20	0.52	0.50
18	0.82	1.00
16	1.31	1.50
14	2.08	2.50
12	3.31	4
10	5.26	6
8	8.37	10
6	13.30	16
4	21.15	25
2	33.62	35
1	42.41	50
1/0	53.49	50
2/0	67.43	70
3/0	85.01	95
4/0	107.2	120
250	126.7	120
300	152.0	150
350	177.3	185
400	202.7	240
500	253.4	240
600	304.0	300
750	380.0	400
800	405.4	400
1000	506.7	500







36-535

# TYPE SHD-GC 3/C MOLD-CURED CPE JACKET • 35000 VOLTS 100% INSULATION LEVEL

## Conductors

Flexible tinned copper

## Ground Check Conductor

Flexible tinned copper with yellow polypropylene insulation

## Strand Shield

Extruded semi-conducting layer

## Ground Wires

Flexible tinned copper

## Insulation Shielding

Semi-conducting rubber and semi-conductive tape

## Jacket<sup>1</sup>

Reinforced mold-cured thermosetting Chlorinated Polyethylene (CPE) Jacket. Cable identification via permanent marking.

## Insulation Shielding

Tinned copper and color coded nylon braid

## Insulation

90°C ethylene-propylene rubber (EPR)

## Assembly

Taped core

## APPLICATION

Heavy duty high voltage portable power cable for use in circuits not exceeding the rated voltage. These cables are used for heavy mobile equipment such as drag lines, shovels, dredges, and for power feeders. Recommended maximum continuous conductor temperature in 90°C. Suitable for shallow water submersion.


Cable carries "LR 82346" marking indicating approval to the Canadian Standards Association specification for Portable Power Cables C22.2 No. 96-17.

Tiger® Brand mining cables meet or exceed ASTM B-172 and B-33.

See Page 13 for jacket color options.

Also available with Extra-Tough Thermoplastic Polyurethane (TPU) jacket for extremely abrasive environments! See page 7.

See Page 14 for Tiger Stripe options



Round-shaped cross-section

## RATINGS & APPROVALS

- Canadian Standards Association C22.2 No. 96 File 82346, FT1, FT4, FT5, -50°C Type SHD, SHD-GC, SHD-BGC up to 35kV
- CSA rated TC-ER
- Suitable for direct burial



Tiger® Brand is a registered trademark of AmerCable Incorporated

## 36-535 • TYPE SHD-GC 3/C • CPE JACKET • 35000 VOLTS

36-535-	Size AWG	Power Conductors		Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG*	Nominal Outside Dimensions mm	Approx. Weight kg/km	Ampacity <sup>1</sup> 30°C Ambient Temp
		No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	259	9.65	6	133	7.11	8	85.30	8639	211
010CSA	1/0	266	9.65	5	133	7.11	8	87.30	9296	241
020CSA	2/0	323	9.65	4	133	7.49	8	91.50	10490	275
030CSA	3/0	418	9.65	3	133	7.49	8	94.50	11518	316
040CSA	4/0	532	9.65	2	133	7.49	8	98.30	12770	361
250CSA	250	627	9.65	1	133	7.49	8	100.00	13917	397
350CSA	350	888	9.65	1/0	259	7.87	8	107.40	16565	483

\* Larger GC conductor sizes available upon request.

133% insulation level available on request

<sup>1</sup> Jacket – CPE jacket. Black CPE is standard.

Colored CPE available upon request.

See page 13 for color options.

\* Ampacity – Based on continuous duty at 90°C  
conductor temperature.

Tolerances – +8%/-5% of nominal outside diameter



## AWG/Metric Cross Reference

AWG/ kcmil Size	Area of AWG/kcmil in mm <sup>2</sup>	Nearest Standard Metric Cond. mm <sup>2</sup>
22	0.35	0.50
20	0.52	0.50
18	0.82	1.00
16	1.31	1.50
14	2.08	2.50
12	3.31	4
10	5.26	6
8	8.37	10
6	13.30	16
4	21.15	25
2	33.62	35
1	42.41	50
1/0	53.49	50
2/0	67.43	70
3/0	85.01	95
4/0	107.2	120
250	126.7	120
300	152.0	150
350	177.3	185
400	202.7	240
500	253.4	240
600	304.0	300
750	380.0	400
800	405.4	400
1000	506.7	500







36-536

# TYPE SHD-GC 3/C

## TPU JACKET • 35000 VOLTS

### 100% INSULATION LEVEL

#### Conductors

Flexible tinned copper

#### Ground Check Conductor

Flexible tinned copper with yellow polypropylene insulation

#### Strand Shield

Extruded semi-conducting layer

#### Insulation

90°C ethylene-propylene rubber (EPR)

#### Ground Wires

Flexible tinned copper

#### Insulation Shielding

Semi-conducting rubber and semi-conductive tape

#### Jacket<sup>1</sup>

Thermoplastic Polyurethane (TPU) Jacket.  
Cable identification via permanent marking.

#### Insulation Shielding

Tinned copper and color coded nylon braid

#### Fillers

#### Assembly


Taped core

#### Rubber Filler and Tape Core

#### Black jacket standard.

See Page 13 for jacket color options.

Also available with mold-cured thermosetting Chlorinated Polyethylene (CPE) jacket.  
See page 5.



Round-shaped cross-section

#### Application Note:

TPU may not be appropriate for non-mining applications.

## RATINGS & APPROVALS

- Canadian Standards Association C22.2 No. 96  
File 82346, FT1, FT5, -50°C  
Type SHD, SHD-GC, SHD-BGC up to 35kV

## APPLICATION

Heavy duty high voltage portable power cable for use in circuits not exceeding the rated voltage. These cables are used for heavy mobile equipment such as drag lines, shovels, dredges, and for power feeders. Recommended maximum continuous conductor temperature in 90°C. Suitable for shallow water submersion.

Cable carries "LR 82346" marking indicating approval to the Canadian Standards Association specification for Portable Power Cables C22.2 No. 96-17.

Tiger® Brand mining cables meet or exceed ASTM B-172 and B-33.



Tiger® Brand is a registered trademark of AmerCable Incorporated



## 36-536 • TYPE SHD-GC 3/C • TPU JACKET • 35000 VOLTS

36-536-	Size AWG	Power Conductors		Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG*	Nominal Outside Dimensions mm	Approx. Weight kg/km	Ampacity <sup>1</sup> 30°C Ambient Temp
		No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	259	9.65	6	133	4.27	8	79.60	7147	211
010CSA	1/0	266	9.65	5	133	4.49	8	82.10	7832	241
020CSA	2/0	323	9.65	4	133	4.49	8	85.50	8700	275
030CSA	3/0	418	9.65	3	133	4.49	8	88.50	9635	316
040CSA	4/0	532	9.65	2	133	4.49	8	92.30	10811	361
250CSA	250	627	9.65	1	133	4.49	8	94.00	11735	397
350CSA	350	888	9.65	1/0	259	4.72	8	101.10	14256	483

\* Larger GC conductor sizes available upon request.

133% insulation level available on request

<sup>1</sup> Jacket – TPU jacket. Black TPU is standard.

Colored TPU available upon request.

See page 13 for color options.

\* Ampacity – Based on continuous duty at 90°C conductor temperature.

Tolerances – +8%/-5% of nominal outside diameter



## AWG/Metric Cross Reference

AWG/ kcmil Size	Area of AWG/kcmil in mm <sup>2</sup>	Nearest Standard Metric Cond. mm <sup>2</sup>
22	0.35	0.50
20	0.52	0.50
18	0.82	1.00
16	1.31	1.50
14	2.08	2.50
12	3.31	4
10	5.26	6
8	8.37	10
6	13.30	16
4	21.15	25
2	33.62	35
1	42.41	50
1/0	53.49	50
2/0	67.43	70
3/0	85.01	95
4/0	107.2	120
250	126.7	120
300	152.0	150
350	177.3	185
400	202.7	240
500	253.4	240
600	304.0	300
750	380.0	400
800	405.4	400
1000	506.7	500





36-605/606

## TYPE MP-GC 3/C

MINE POWER FEEDER • MOLD-CURED CPE JACKET  
25000-35000 VOLTS • 100% LEVEL\* (GROUNDED)

### Conductors

Copper

### Ground Check Conductor

8 AWG 7-wire copper with yellow polypropylene insulation

### Strand Shield

Semi-conducting layer

### Insulation

90°C ethylene-propylene rubber (EPR)

### Ground Wires

Tinned copper

Available with two grounds and ground check or three ground configuration per CSA.

### Insulation Shielding

Semi-conducting layer under copper tape (phase identification provided)


### Assembly

Taped core

### Jacket<sup>1</sup>

Mold-cured thermosetting Chlorinated Polyethylene (CPE) Jacket. Cable identification via permanent marking.

See Page 13 for jacket color options.



## APPLICATION

Connections between units of mine distribution systems not exceeding the rated voltage when installed in duct, conduit or open air and for direct burial in wet and dry locations. Recommended maximum continuous conductor temperature is 90°C.

Cable carries CSA "LR 82346" and MSHA "P-7K-184096" (for black jacket).

Tiger® Brand Mining Cable meets or exceeds ICEA Standards S-75-381/NEMA WC-58, up to 25kV, and ASTM B-8 and B-33.

\*133% insulation level available on request



Cable may be suspended vertically by using a messenger and special mechanical connectors.

## RATINGS & APPROVALS

- Canadian Standards Association C22.2 #96.1, File LR82346, FT5, -35°C  
Type MP-GC, MPF up to 35kV.
- Mine Safety & Health Administration up to 35kV.
- Pennsylvania Department of Environmental Protection.
- Insulated Cable Engineers Association S-75-381 up to 25kV.

Tiger® Brand is a registered trademark of AmerCable Incorporated.



## 25000 VOLTS • 36-605 • EP-CPE JACKET • TYPE MP-GC 3/C

36-605-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG <sup>2</sup>	Nominal Outside Dimensions mm	Approx. Weight kg's per km	Ampacity * 30°C Ambient Temp
	Size AWG	Minimum No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	18	6.60	5	7	3.6	8	61.5	5302	210
010CSA	1/0	18	6.60	4	7	3.6	8	63.7	5918	240
020CSA	2/0	18	6.60	3	7	4.3	8	67.1	6688	274
030CSA	3/0	18	6.60	2	7	4.3	8	70.2	7704	315
040CSA	4/0	18	6.60	1	19	4.3	8	73.5	8881	360
250CSA	250	35	6.60	1/0	19	4.3	8	76.0	9814	396
350CSA	350	35	6.60	2/0	19	4.3	8	81.7	12262	482
500CSA	500	35	6.60	3/0	19	4.3	8	88.8	15369	590

<sup>1</sup> Jacket – CPE jacket. Black is standard. Colored CPE jackets available upon request. See page 13.

\*Ampacity – Based on continuous duty at 90°C conductor temperature.

Tolerances – + 8%/-5% of nominal outside diameter

<sup>2</sup> Larger GC conductor sizes available upon request.

## 35000 VOLTS • 36-606 • EP-CPE JACKET • TYPE MP-GC 3/C

36-606-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG <sup>2</sup>	Nominal Outside Dimensions mm	Approx. Weight kg's per km	Ampacity * 30°C Ambient Temp
	Size AWG	Minimum No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
010CSA	1/0	18	8.76	4	7	4.3	8	74.3	7452	240
020CSA	2/0	18	8.76	3	7	4.3	8	76.8	8256	274
030CSA	3/0	18	8.76	2	7	4.3	8	79.6	9223	315
040CSA	4/0	18	8.76	1	19	4.3	8	81.9	10312	360
250CSA	250	35	8.76	1/0	19	4.3	8	85.2	11289	396
350CSA	350	35	8.76	2/0	19	5.1	8	91.8	14173	482
500CSA	500	35	8.76	3/0	19	5.1	8	100.6	17818	590

<sup>1</sup> Jacket – CPE jacket. Black is standard. Colored CPE jackets available upon request. See page 13.

\*Ampacity – Based on continuous duty at 90°C conductor temperature.

Tolerances – + 8%/-5% of nominal outside diameter

<sup>2</sup> Larger GC conductor sizes available upon request.



36-625/615/616

## TYPE MP-GC 3/C

MINE POWER FEEDER • 100% LEVEL\* (GROUNDED)

25000 VOLTS - XLP INSULATION / PVC JACKET

35000 VOLTS - EPR INSULATION / PVC JACKET

### Conductors

Copper

### Ground Check Conductor

8 AWG 7-wire copper with yellow polypropylene insulation

### Strand Shield

Semi-conducting layer

### Insulation

90°C cross-linked polyethylene to 25000 V.

90°C ethylene propylene rubber (EPR) to 35000 V.

### Fillers

### Binder Tape

### Jacket<sup>1</sup>

Polyvinyl chloride (PVC), cable identification via permanent surface marking.

Standard jacket is black. **PVC jacket color options are the same as CPE. See Page 13.**

### Ground Wires

Tinned Copper


Available with two grounds and ground check or three ground configuration per CSA.

### Insulation Shielding

Semi-conducting layer under copper tape (phase identification provided)

### Assembly

Taped core



## APPLICATION

Connections between units of mine distribution systems not exceeding the rated voltage when installed in duct, conduit or open air. For direct burial in wet and dry locations. Recommended maximum continuous conductor temperature is 90°C.

Cable carries CSA "LR 82346" and MSHA "P-07-KA13008" markings.

Tiger® Brand Mining Cable meets or exceeds ICEA Standards S-75-381/NEMA WC-58, up to 25kV, and ASTM B-8 and B-33.

\*133% insulation level available on request



## RATINGS & APPROVALS

- Canadian Standards Association C22.2 #96.1, File LR 82346  
XLP-PVC Jacket - FT5, -35°C  
EPR-PVC Jacket - FT4, FT5 -35°C  
Type MP-GC, MPF up to 35kV.
- Mine Safety & Health Administration up to 25kV.
- Pennsylvania Department of Environmental Protection.
- Insulated Cable Engineers Association S-75-381 up to 25kV.

Tiger® Brand is a registered trademark of AmerCable Incorporated.



## 25000 VOLTS • 36-625 • XLP-PVC JACKET • TYPE MP-GC 3/C

36-625-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG	Nominal Outside Dimensions mm	Approx. Weight kg's per km	Ampacity <sup>1</sup> 30°C Ambient Temp
	Size AWG	Minimum No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	18	6.60	5	7	3.6	8	61.5	5302	210
010CSA	1/0	18	6.60	4	7	3.6	8	63.7	5918	240
020CSA	2/0	18	6.60	3	7	4.3	8	67.1	6688	274
030CSA	3/0	18	6.60	2	7	4.3	8	70.2	7704	315
040CSA	4/0	18	6.60	1	19	4.3	8	73.5	8881	360
250CSA	250	35	6.60	1/0	19	4.3	8	76.0	9814	396
350CSA	350	35	6.60	2/0	19	4.3	8	81.7	12262	482
500CSA	500	35	6.60	3/0	19	4.3	8	88.8	15369	590

<sup>1</sup> Jacket – PVC jacket. Black is standard. Colored PVC jackets available upon request. Tolerances – + 8%/-5% of nominal outside diameter

\*Ampacity – Based on continuous duty at 90°C conductor temperature.

## 25000 VOLTS • 36-615 • EP-PVC JACKET • TYPE MP-GC 3/C

36-615-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG	Nominal Outside Dimensions mm	Approx. Weight kg's per km	Ampacity <sup>1</sup> 30°C Ambient Temp
	Size AWG	Minimum No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
001CSA	1	18	6.60	5	7	3.6	8	61.5	4673	210
010CSA	1/0	18	6.60	4	7	3.6	8	63.8	5256	240
020CSA	2/0	18	6.60	3	7	4.3	8	67.2	6025	274
030CSA	3/0	18	6.60	2	7	4.3	8	70.3	6894	315
040CSA	4/0	18	6.60	1	19	4.3	8	73.5	8026	360
250CSA	250	35	6.60	1/0	19	4.3	8	76.0	8925	396
350CSA	350	35	6.60	2/0	19	4.3	8	81.7	11315	482
500CSA	500	35	6.60	3/0	19	4.3	8	88.8	14055	590

<sup>1</sup> Jacket – PVC jacket. Black is standard. Colored PVC jackets available upon request. Tolerances – + 8%/-5% of nominal outside diameter

\*Ampacity – Based on continuous duty at 90°C conductor temperature.

## 35000 VOLTS • 36-616 • EP-PVC JACKET • TYPE MP-GC 3/C

36-616-	Power Conductors			Grounding Conductors		Jacket Thickness mm	Ground Check Conductor Size AWG	Nominal Outside Dimensions mm	Approx. Weight kg's per km	Ampacity <sup>1</sup> 30°C Ambient Temp
	Size AWG	Minimum No. of Wires per Conductor	Insulation Thickness mm	Size AWG	Minimum No. of Wires per Conductor					
010CSA	1/0	18	8.76	4	7	4.3	8	74.2	6486	240
020CSA	2/0	18	8.76	3	7	4.3	8	76.8	7221	274
030CSA	3/0	18	8.76	2	7	4.3	8	79.4	8077	315
040CSA	4/0	18	8.76	1	19	4.3	8	82.6	9196	360
250CSA	250	18	8.76	1/0	19	4.3	8	84.7	10107	396
350CSA	350	18	8.76	2/0	19	5.1	8	91.8	2785	482
500CSA	500	18	9.65	3/0	19	5.1	8	100.5	15976	590

<sup>1</sup> Jacket – PVC jacket. Black is standard. Colored PVC jackets available upon request. Tolerances – + 8%/-5% of nominal outside diameter

\*Ampacity – Based on continuous duty at 90°C conductor temperature.



# JACKET MATERIALS & COLOR OPTIONS

## Nexans AmerCable CPE Jackets

Nexans AmerCable's thermoset Chlorinated Polyethylene jacket provides the physical performance and strength needed to resist wear, tear, abrasion and compression cuts caused by everyday mining use.

This tough, durable jacket is a proven performer in mines throughout the world. Nexans AmerCable's engineered cable construction includes a taped-core, integral fill and tandem extrusion of the jacket layers. Two-pass jackets, extruded in tandem, yield an inseparable bond between the layers. Integral filling of the cable core reduces torsion-induced damage.



Black (standard) Blue Green Orange Yellow Red

*Colored jackets maintain physical properties equal to the standard black jacket.*

## Nexans AmerCable TPU Jackets

For extremely abrasive environments, AmerCable's Thermoplastic Polyurethane (TPU) jacket provides the **extra-tough** physical characteristics needed in the roughest mining environments.


Compared to Nexans AmerCable's standard CPE jacketing material, TPU provides:

**5X more abrasion resistance**

**2X more tear resistance**

**2X more tensile strength**


**Up to 8% Less Jacket Weight**

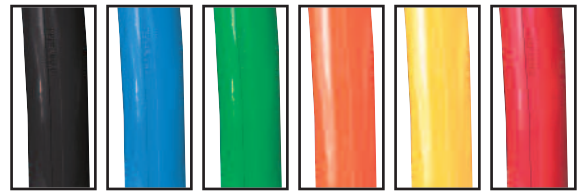

Black (standard) Blue Green Orange Yellow Red



These brightly colored cables can improve mine safety by providing easy circuit identification.

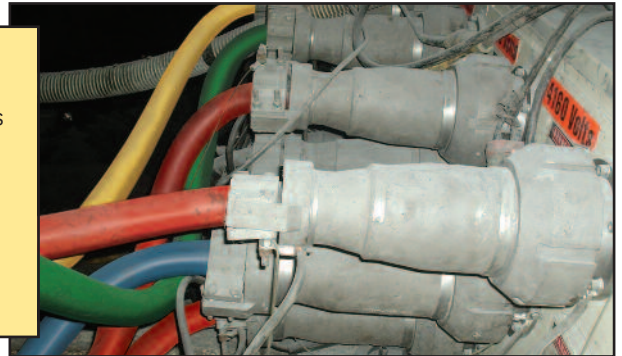

## FACTORY INSTALLED CABLE ASSEMBLIES



Lower Overall Cost


Enhanced Reliability

Reduced Installation Time



# TIGER STRIPES – REFLECTIVE


Available only on CPE jacketed cables

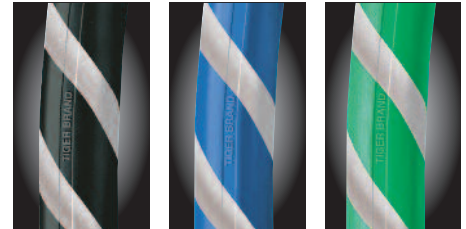

Black  
(standard)

Blue

Green

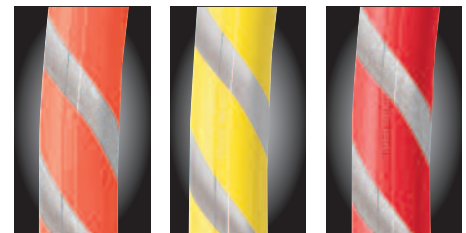

Orange

Yellow

Red


Nexans AmerCable's reflective **Tiger Stripes** can extend cable life by reducing run-overs in low visibility situations and **improve mine safety** by providing easier visual circuit identification.

# TIGER STRIPES – STANDARD

Available only on CPE jacketed cables



Nexans AmerCable's standard **Tiger Stripes** provide additional color combinations by vulcanizing a contrasting colored stripe into the jacket of our round CPE cables.

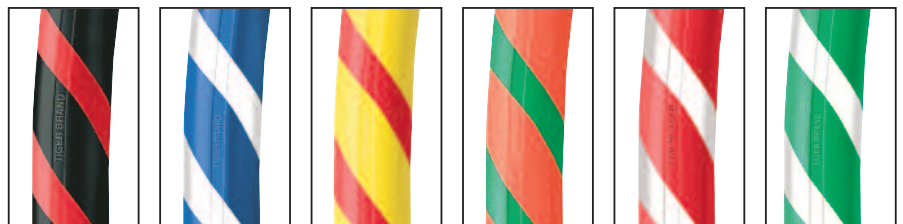

Black/Red


Blue/White

Yellow/Red

Orange/Green

Red/White

Green/White

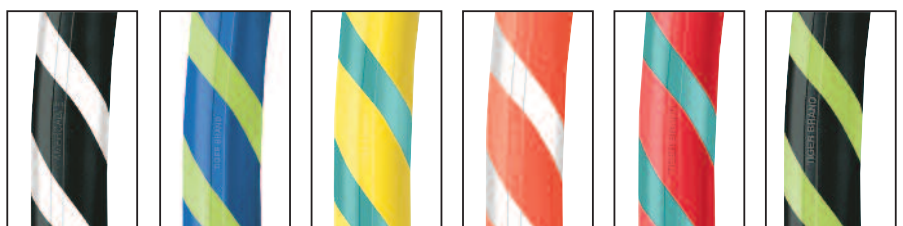

Black/White

Blue/Green

Yellow/Green

Orange/White

Red/Blue

Black/Green

Consult with your Nexans AmerCable rep or the factory for a complete list of available stripe options.

**TIGER® BRAND**

# MINING CABLES

25-35kV TYPE SHD-GC & MP-GC

**Nexans AmerCable** is the leading global manufacturer of surface and underground mining cables.



Nexans AmerCable is an ISO 9001 certified cable manufacturer that combines leading-edge technology, proven manufacturing techniques and high quality service to deliver the finest mining cable products available.

Nexans AmerCable serves a worldwide customer base from our manufacturing facility in El Dorado, Arkansas. Our professional field engineers and customer support team work directly, or in partnership with a network of independent distributors, to deliver productivity enhancing cable solutions.

## WHAT CAN YOU EXPECT FROM NEXANS AMERCABLE?

- High-Quality Cable with an Emphasis on Safety
- On-Time Delivery
- Professional Sales, Support and Service
- Strategic Inventory Locations
- Short Lead Times

CLICK HERE TO  
**FOLLOW US!**



### **Nexans AmerCable**

350 Bailey Road - El Dorado, Arkansas USA  
(870) 862-4919 • (800) 643-1516 • Fax (870) 862-9613  
e-mail: [mining@nexansamercable.com](mailto:mining@nexansamercable.com)  
[www.nexansamercable.com](http://www.nexansamercable.com)

© 2018, AmerCable Incorporated 3\_18

